


# Plate & Filament or Bias *261-262 Series*

## 115 V Primary



### Features

- Primary 115 VAC, 60 Hz.
- Designed for small power or bias supplies, test equipment, preamps etc.
- Models 261C6, 261E6, and 261G6 can also be used with full wave C.T. rectifiers.
- Economical , two hole, channel bracket, chassis mount.
- Minimum 5" long leads.
- Convenient 6.3 or 12.6 volt filament/auxiliary winding.

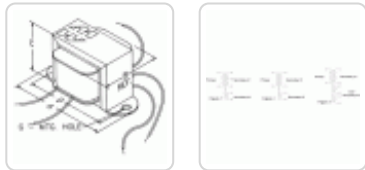

| Part No.      | VA   | A.C. Secondary     |                   | Schematic Figure # or PDF | Dimensions |      |      |      |             | Weight (Lbs) |
|---------------|------|--------------------|-------------------|---------------------------|------------|------|------|------|-------------|--------------|
|               |      | #1 RMS             | #2 RMS            |                           | A          | B    | C    | D    | G           |              |
| <b>261C6</b>  | 17.5 | 250V C.T. @ 45 ma  | 6.3V @ 1A         | 1                         | 3.25       | 1.65 | 2.00 | 2.81 | 0.19        | 1            |
| <b>261E6</b>  | 29   | 250V C.T. @ 91 ma  | 6.3V @ 1A         | 1                         | 3.69       | 1.85 | 2.31 | 3.13 | 0.19        | 1.7          |
| <b>261G6</b>  | 45   | 250V C.T. @ 130 ma | 6.3V @ 2A         | 1                         | 4.00       | 2.25 | 2.63 | 3.56 | 0.19        | 2            |
| <b>261M6</b>  | 83   | 215V @ 269 ma      | 6.3V @ 4A         | 2                         | 4.50       | 2.50 | 2.93 | 4.00 | 0.20 x 0.31 | 4            |
| <b>262A12</b> | 6    | 125V @ 15ma        | 12.6V @ 0.3A      | See PDF                   | -          | -    | -    | -    | -           | -            |
| <b>262B6</b>  | 7    | 120V @ 43 ma       | 6.3V @ 0.3A       | 2                         | 2.81       | 1.50 | 1.68 | 2.38 | 0.19        | 0.6          |
| <b>262B12</b> | 9    | 120V @ 45 ma       | 12.6V @ 0.3A      | 2                         | 2.81       | 1.50 | 1.68 | 2.38 | 0.19        | 0.6          |
| <b>262B24</b> | 8    | 120V @ 27 ma       | 12/12V @ 0.2/0.2A | 3                         | 2.81       | 1.50 | 1.68 | 2.38 | 0.19        | 0.6          |
| <b>262D6</b>  | 12   | 120V @ 53 ma       | 6.3V @ 0.9A       | 2                         | 3.25       | 1.62 | 2.00 | 2.81 | 0.19        | 1            |
| <b>262D12</b> | 12   | 120V @ 53 ma       | 12.6V @ 0.45A     | 2                         | 3.25       | 1.62 | 2.00 | 2.81 | 0.19        | 1            |
| <b>262E6</b>  | 18   | 120V @ 87 ma       | 6.3V @ 1.2A       | 2                         | 3.25       | 2.00 | 2.00 | 2.81 | 0.19        | 1.3          |
| <b>262E12</b> | 18   | 120V @ 87 ma       | 12.6V @ 0.6A      | 2                         | 3.25       | 2.00 | 2.00 | 2.81 | 0.19        | 1.3          |
| <b>262F6</b>  | 26   | 120V @ 140 ma      | 6.3V @ 1.5A       | 2                         | 3.69       | 1.85 | 2.31 | 3.13 | 0.19        | 1.7          |
| <b>262F12</b> | 26   | 120V @ 140 ma      | 12.6V @ 0.75A     | 2                         | 3.69       | 1.85 | 2.31 | 3.13 | 0.19        | 1.5          |

*Data subject to change without notice*

