

PCB terminal block - PTSM 0,5/ 1-2,5-H SMD WH L R24 - 1840035

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



PCB terminal block, Nominal current: 6 A, Nom. voltage: 250 V, Number of positions: 1, Connection method: Spring-cage connection, Mounting: SMD/THT/THR, Conductor/PCB connection direction: 0 °, Color: white



Key commercial data

Packing unit	1 pc
Minimum order quantity	1000 pc
Weight per Piece (excluding packing)	0.74 GRM
Custom tariff number	85369010
Country of origin	India

Classifications

eCl@ss

eCl@ss 5.1	27141190
eCl@ss 6.0	27261101
eCl@ss 8.0	27440401

ETIM

ETIM 4.0	EC002637
ETIM 5.0	EC002637

Approvals

Approvals

Approvals

UL Recognized

PCB terminal block - PTSM 0,5/ 1-2,5-H SMD WH L R24 - 1840035

Approvals

Ex Approvals


Approvals submitted

Approval details


UL Recognized	
	B
mm ² /AWG/kcmil	26-20
Nominal current I _N	5 A
Nominal voltage U _N	150 V

Drawings

Drilling diagram



Dimensioned drawing

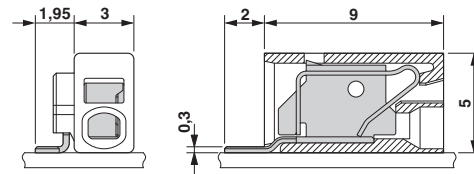

Diagram

