

SLA215K



RoHS Compliant

High Current Power Rocker Switches



UL CSA ENEC

Features

- High capacity of 15 A is realized with a compact body.
- The reinforced insulation structure realized by adoption of a resin frame ensures use without anxiety.
- Easy snap-in panel mounting
- The switch is structured so that the use of the soldering terminals and the TAB receptacle (#187) can be chosen.
- Best suited for use with the power supply of high-capacity equipment.
The RoHS compliance design realized cadmium- and lead-free products.
- UL**, **CSA** and **ENEC** approved products.
*No ENEC-approved product is available for the tab terminal type.

Specifications

Rating	Resistive load	15A 125V AC 15A 250V AC
	Inductive load	36A/15Ap.f.=0.6/0.9 250V AC
	Min.rating	100mA 5V AC/DC
Initial contact resistance		20mΩ max. (1A 2~4V DC)
Dielectric strength		1,500V AC 1 minute
Insulation resistance		100MΩ min. (500V DC)
Electrical life(cycles)		10,000 cycles
Operating force		2.94~12.74N
Operating temperature range		-25~+85°C
Storage temperature range		-40~+85°C

Part Numbering

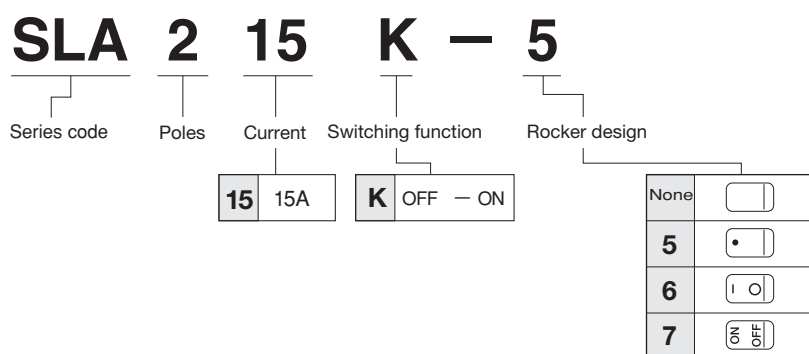


Table of Part Numbers


TYPE	★SLA215K	SLA215K-5	★SLA215K-6	☆SLA215K-7
MARKING COLOR (WHITE)				
	UNFIGURED			

Approvals

UL File No.E43275
 CSA File No.LR38341
 ENEC Ref. No. SE/05105-03

SLA215K


Appearance style

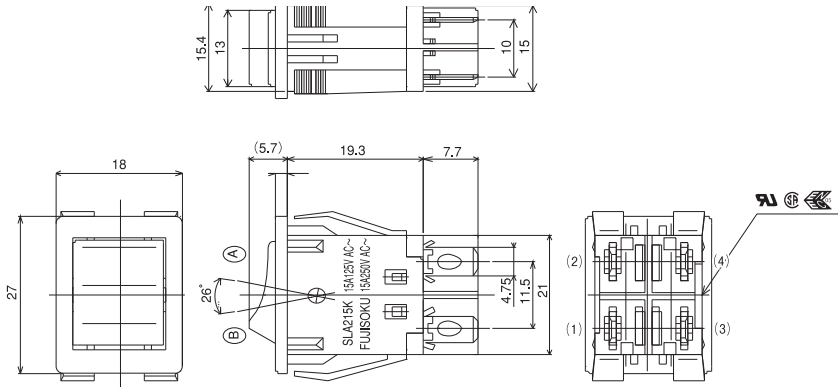

CIRCUIT CHARACTERISTICS		
CIRCUIT ARRANGEMENT	DIAGRAM	TERMINALS
WITH ROCKER TO SIDE OF A	WITH ROCKER TO SIDE OF B	
OFF	ON	
—	(1) — (2) (3) — (4)	4


Terminal numbers are shown on the bottom of the switch.

Panel Cut-Out Dimensions



PANEL THICKNESS : 1.0~3.5

Terminal Style

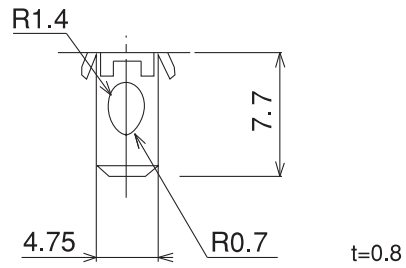


Solder Terminal (It can be used for TAB #187)

Soldering Specifications

Manual Soldering
 Device : Soldering iron
 380°C, Max.; 3 seconds, Max.

Packaging Specification

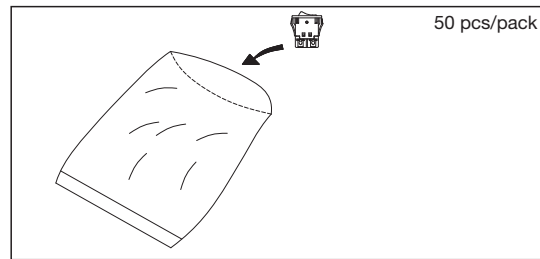

Precautions for Panel Mounting

Applicable Series Products:
 SLE6/10, SLE210K, SL10K, SLE10K and SLA215K

The edges on the back of the cut-out panel should be squared so that the switch box bites the panel firmly. When the panel is coated, pay attention that the coating will not retain around the edge. Do not reuse the switch that was once mounted on a panel.

