

BARBARA-W-PF

~35° wide beam


TECHNICAL SPECIFICATIONS:

Dimensions	Ø 70 mm
Height	41.7 mm
Fastening	socket
Colour	metal
Box size	480 x 280 x 300 mm
Box weight	7.7 kg
Quantity in Box	288 pcs
ROHS compliant	yes ⓘ


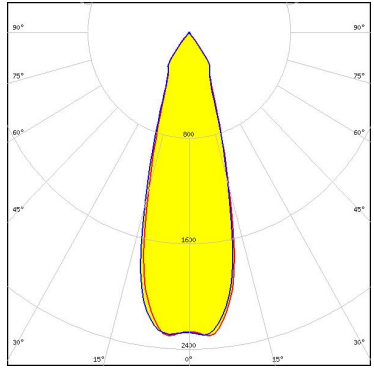
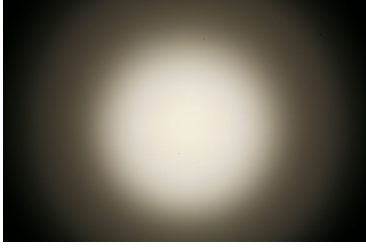
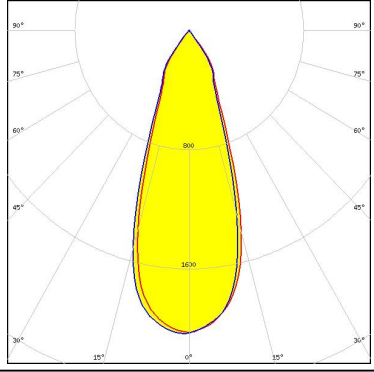
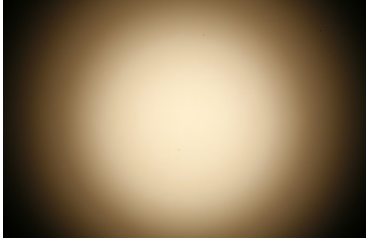
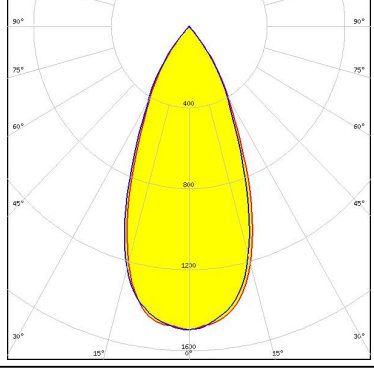
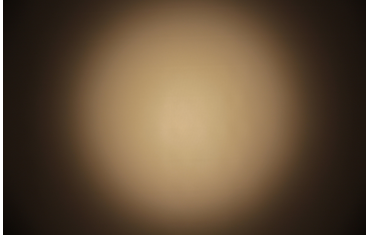
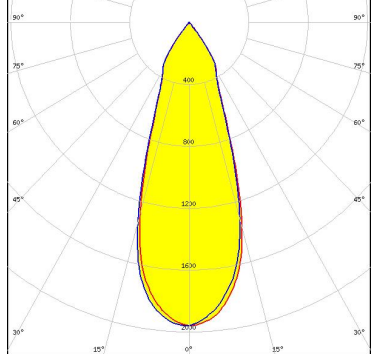


MATERIAL SPECIFICATIONS:


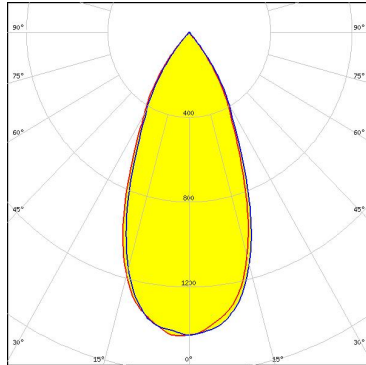
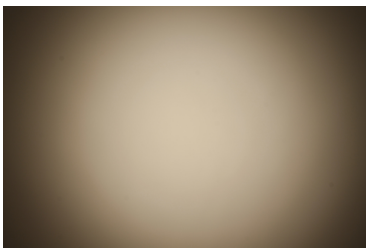
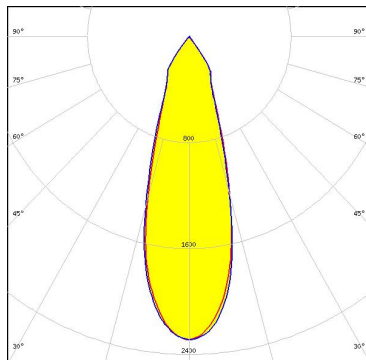
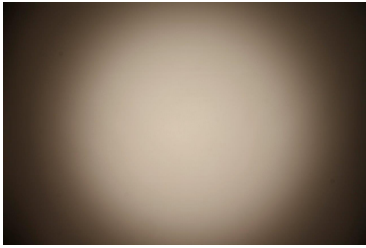
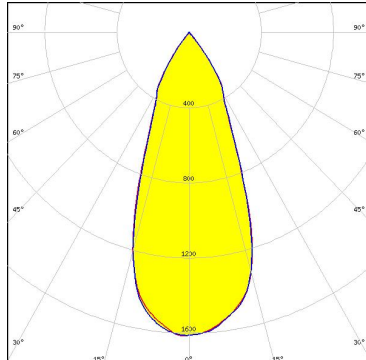
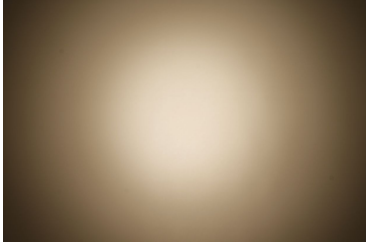
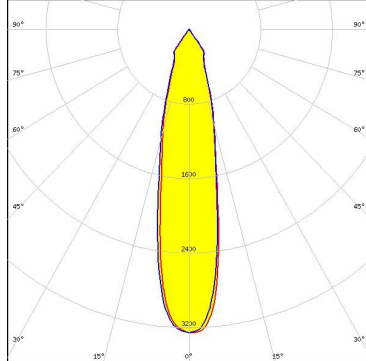
Component	Type	Material	Colour	Coating
BARBARA-W-PF	Reflector	PC	metal	HMDS

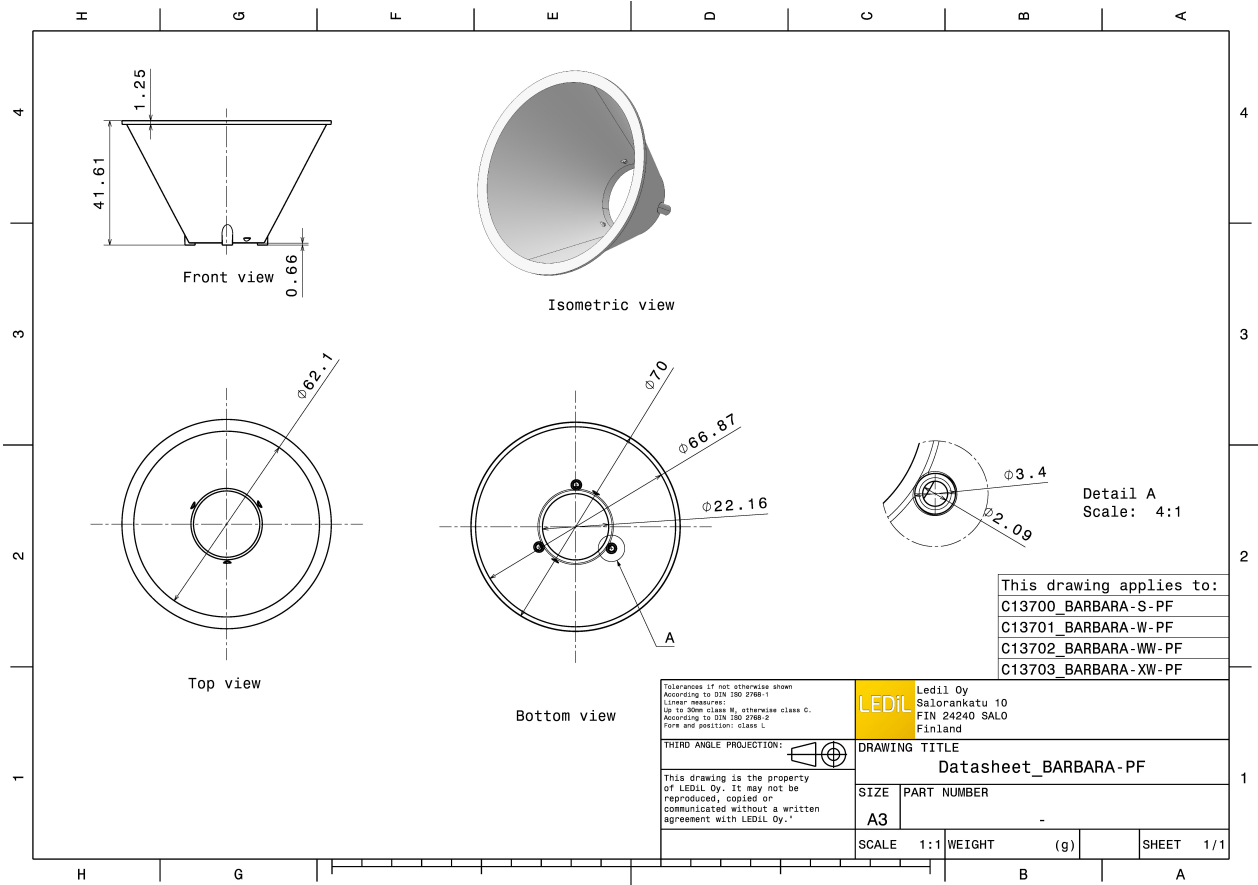

PHOTOMETRIC DATA (MEASURED):

<p>bridgelux.</p> <p>LED VERO10</p> <p>FWHM 31.0°</p> <p>Efficiency 91 %</p> <p>Peak intensity 2.300 cd/lm</p> <p>Required components: C13708_PF-SOCKET-VERO10</p>		
<p>bridgelux.</p> <p>LED VERO13</p> <p>FWHM 36.0°</p> <p>Efficiency 93 %</p> <p>Peak intensity 2.000 cd/lm</p> <p>Required components: C13709_PF-SOCKET-VERO13-18</p>		
<p>bridgelux.</p> <p>LED VERO18</p> <p>FWHM 45.0°</p> <p>Efficiency 92 %</p> <p>Peak intensity 1.500 cd/lm</p> <p>Required components: C13709_PF-SOCKET-VERO13-18</p>		
<p>bridgelux.</p> <p>LED Xenio Point 13mm</p> <p>FWHM 36.0°</p> <p>Efficiency 91 %</p> <p>Peak intensity 1.960 cd/lm</p> <p>Required components: C13709_PF-SOCKET-VERO13-18</p>		



PHOTOMETRIC DATA (MEASURED):

<p>bridgelux</p> <p>LED Xenio Point 18mm</p> <p>FWHM 46.0°</p> <p>Efficiency 89 %</p> <p>Peak intensity 1.430 cd/lm</p> <p>Required components: C13709_PF-SOCKET-VERO13-18</p>		
<p>CITIZEN</p> <p>LED CLL02x/CLU02x (LES10)</p> <p>FWHM 32.0°</p> <p>Efficiency 88 %</p> <p>Peak intensity 2.300 cd/lm</p> <p>Required components: C13709_PF-SOCKET-VERO13-18 Bender Wirth: 434 Typ L1</p>		
<p>CITIZEN</p> <p>LED CLL03x/CLU03x</p> <p>FWHM 41.0°</p> <p>Efficiency 87 %</p> <p>Peak intensity 1.600 cd/lm</p> <p>Required components: C13709_PF-SOCKET-VERO13-18 Bender Wirth: 433 Typ L1</p>		
<p>CITIZEN</p> <p>LED CLU700/701</p> <p>FWHM 22.0°</p> <p>Efficiency 89 %</p> <p>Peak intensity 3.300 cd/lm</p> <p>Required components: C13709_PF-SOCKET-VERO13-18 Bender Wirth: 434 Typ L1</p>		



PHOTOMETRIC DATA (MEASURED):





LED CXA/B 15xx
 FWHM 30.0°
 Efficiency 88 %
 Peak intensity 2.500 cd/lm
 Required components:
 C13709_PF-SOCKET-VERO13-18
 Bender Wirth: 441 Typ L1

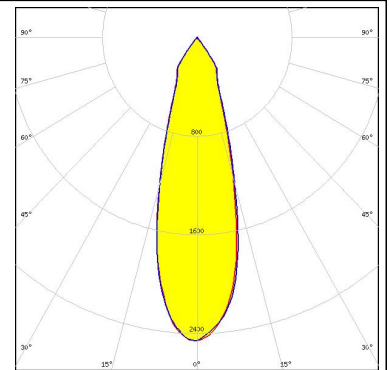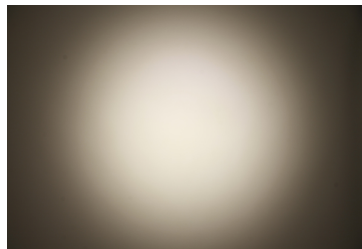



LED CXA/B 15xx
 FWHM 30.0°
 Efficiency 91 %
 Peak intensity 2.640 cd/lm
 Required components:
 C14115_PF-SOCKET-CXA15-18

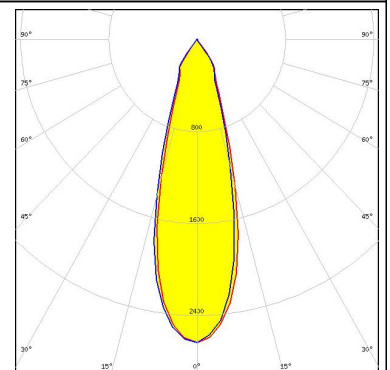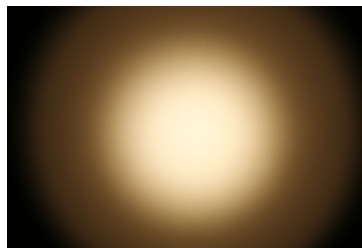

LED CXA/B 15xx
 FWHM 30.0°
 Efficiency 85 %
 Peak intensity 2.200 cd/lm
 Required components:
 C13083_PF-SOCKET
 C14658_BARBARA-RZ-LENS

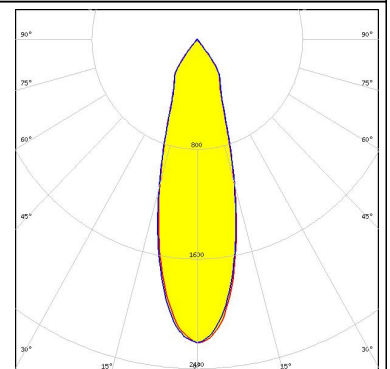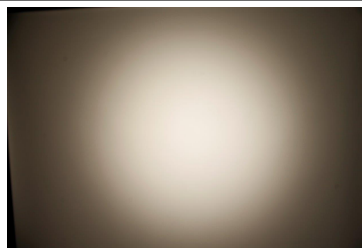



LED CXA/B 1816 & CXA/B 1820 & CXA 1850
 FWHM 36.0°
 Efficiency 94 %
 Peak intensity 2.100 cd/lm
 Required components:
 C14115_PF-SOCKET-CXA15-18

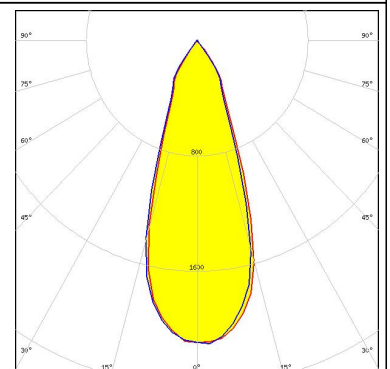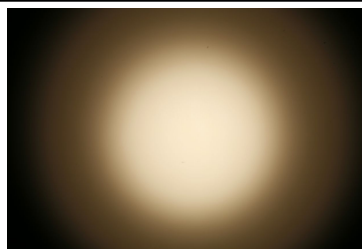



PHOTOMETRIC DATA (MEASURED):





LED CXA/B 1816 & CXA/B 1820 & CXA 1850
 FWHM 36.0°
 Efficiency 88 %
 Peak intensity 2.000 cd/lm
 Required components:
 C13709_PF-SOCKET-VERO13-18
 Bender Wirth: 437 Typ L1

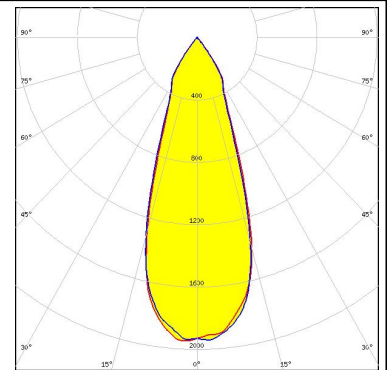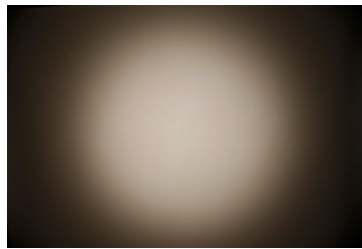


LED LUXEON CoB 1202/1203
 FWHM 30.0°
 Efficiency 91 %
 Peak intensity 2.700 cd/lm
 Required components:
 C14037_PF-NSX-SOCKET

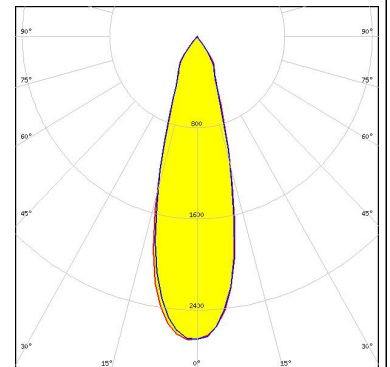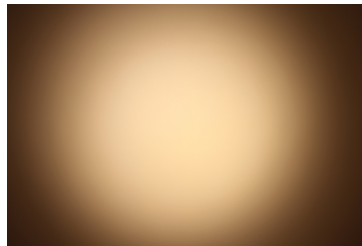

LED LUXEON CoB 1202/1203
 FWHM 31.0°
 Efficiency 90 %
 Peak intensity 2.400 cd/lm
 Required components:
 C13709_PF-SOCKET-VERO13-18
 Bender Wirth: 438 Typ L1

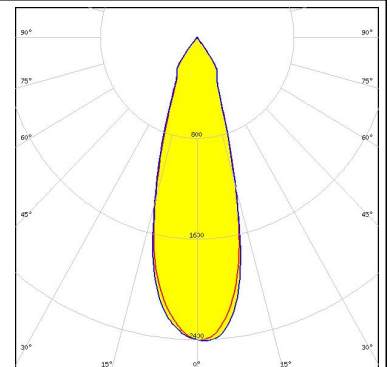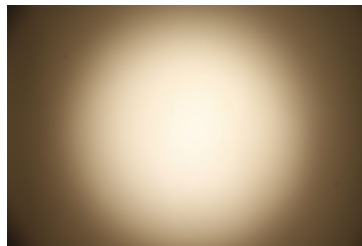



LED LUXEON CoB 1202s
 FWHM 20.0°
 Efficiency 92 %
 Peak intensity 4.100 cd/lm
 Required components:
 C13761_PF-SOCKET-CXA15

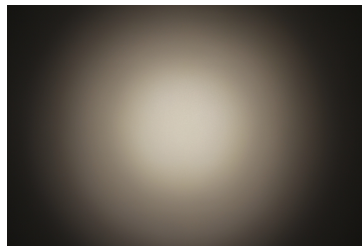



PHOTOMETRIC DATA (MEASURED):





LED COB J-Type
 FWHM 40.0°
 Efficiency 88 %
 Peak intensity 1.700 cd/lm
 Required components:
 C13709_PF-SOCKET-VERO13-18
 Bender Wirth: 463 Typ L2

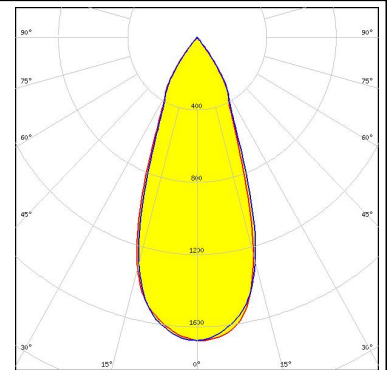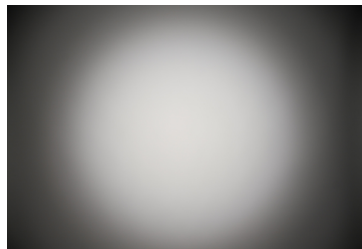



LED COB J-Type
 FWHM 41.0°
 Efficiency 92 %
 Peak intensity 1.760 cd/lm
 Required components:
 C14037_PF-NSX-SOCKET

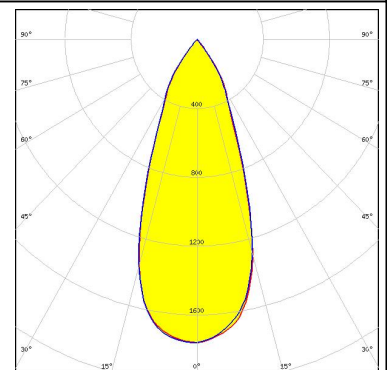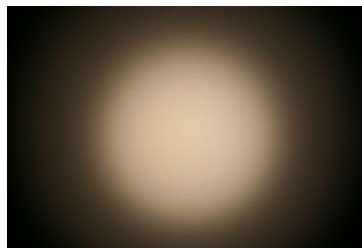






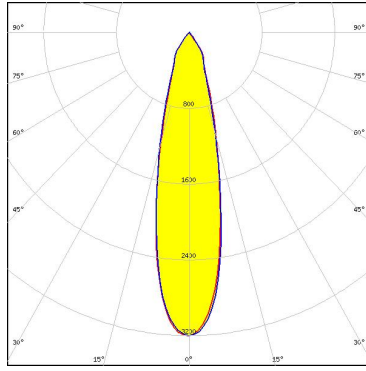

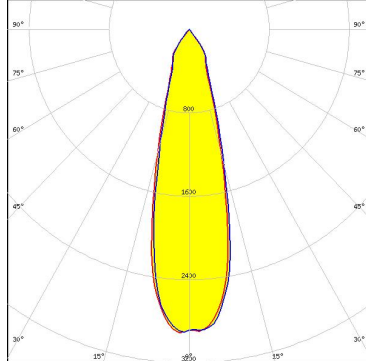
LED COB L-Type (LES 11)
 FWHM 35.0°
 Efficiency 91 %
 Peak intensity 2.100 cd/lm
 Required components:
 C14037_PF-NSX-SOCKET

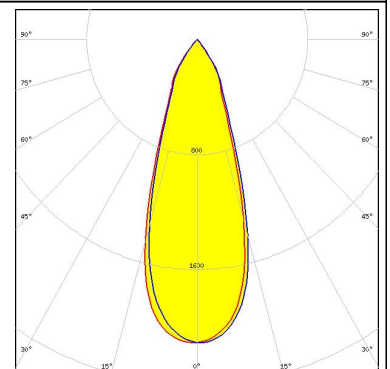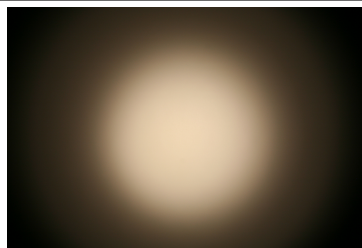

LED COB L-Type (LES 11)
 FWHM 35.0°
 Efficiency 88 %
 Peak intensity 2.000 cd/lm
 Required components:
 C13709_PF-SOCKET-VERO13-18
 Bender Wirth: 438 Typ L1

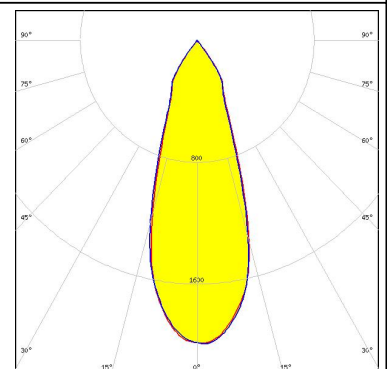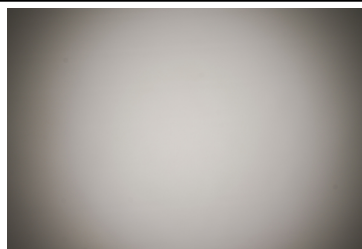

PHOTOMETRIC DATA (MEASURED):

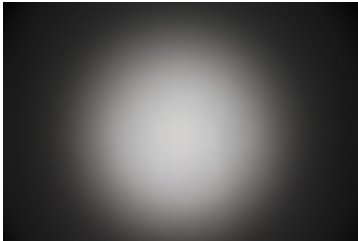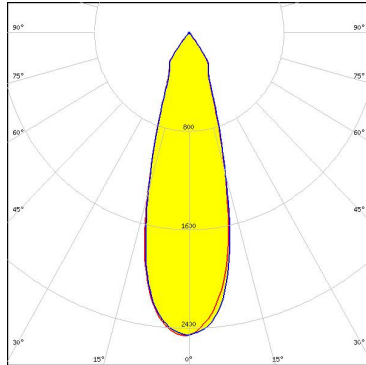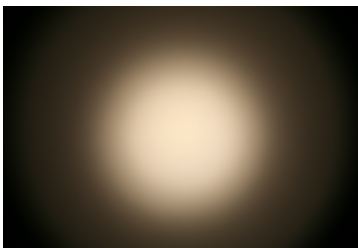
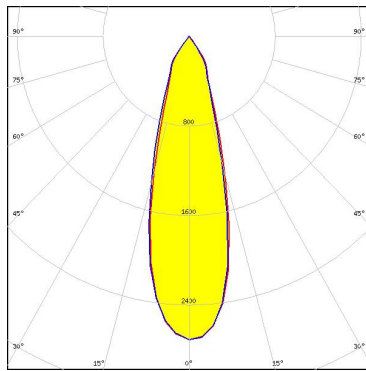
<p>NICHIA</p> <p>LED COB L-Type (LES 9)</p> <p>FWHM 30.0°</p> <p>Efficiency 91 %</p> <p>Peak intensity 2.500 cd/lm</p> <p>Required components: C13709_PF-SOCKET-VERO13-18 Bender Wirth: 438 Typ L1</p>		
<p>NICHIA</p> <p>LED COB L-Type (LES 9)</p> <p>FWHM 30.0°</p> <p>Efficiency 92 %</p> <p>Peak intensity 2.710 cd/lm</p> <p>Required components: C14037_PF-NSX-SOCKET</p>		
<p>NICHIA</p> <p>LED NSCxL036A</p> <p>FWHM 25.0°</p> <p>Efficiency 90 %</p> <p>Peak intensity 3.200 cd/lm</p> <p>Required components: C14037_PF-NSX-SOCKET</p>		
<p>OSRAM Opto Semiconductors</p> <p>LED Soleriq P9</p> <p>FWHM 28.0°</p> <p>Efficiency 92 %</p> <p>Peak intensity 2.910 cd/lm</p> <p>Required components: C13761_PF-SOCKET-CXA15</p>		

PHOTOMETRIC DATA (MEASURED):

OSRAM



Opto Semiconductors

LED Soleriq S13
 FWHM 37.0°
 Efficiency 89 %
 Peak intensity 1.900 cd/lm
 Required components:
 C13709_PF-SOCKET-VERO13-18
 Bender Wirth: 437 Typ L1

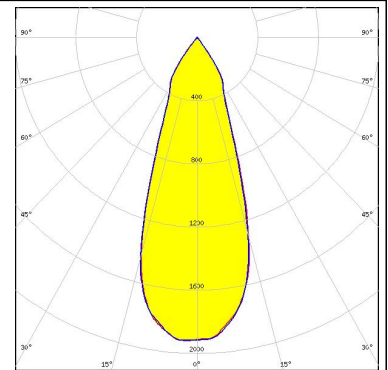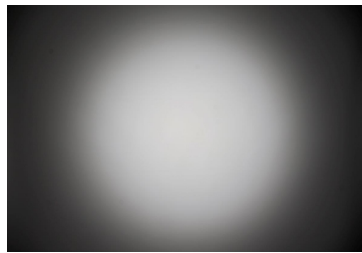



SAMSUNG

LED LC026B / 033B / 040B
 FWHM 45.0°
 Efficiency 87 %
 Peak intensity 1.400 cd/lm
 Required components:
 C13709_PF-SOCKET-VERO13-18
 Bender Wirth: 450 Typ L2

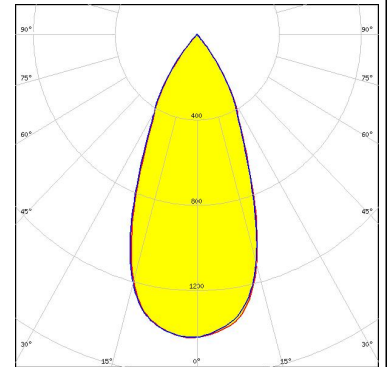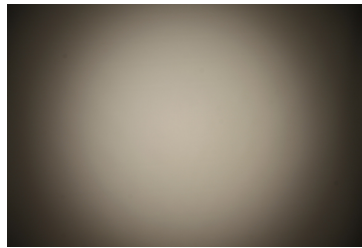



TRIDONIC

LED SLE G5 LES11
 FWHM 33.0°
 Efficiency 90 %
 Peak intensity 2.200 cd/lm
 Required components:
 C13709_PF-SOCKET-VERO13-18
 Bender Wirth: 434 Typ L1

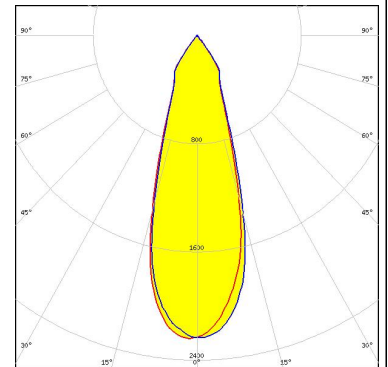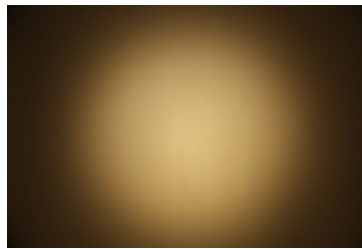

XICATO

LED XTM - 19mm LES
 FWHM 45.0°
 Efficiency 86 %
 Peak intensity 1.400 cd/lm
 Required components:
 C14636_XTM-PF-ADAPTER

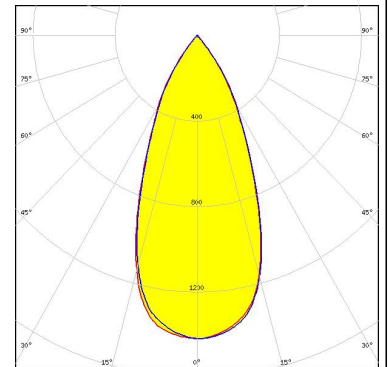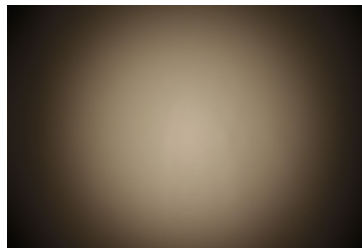

PHOTOMETRIC DATA (MEASURED):

XICATO

LED XTM - 9mm LES



FWHM 30.0°

Efficiency 89 %

Peak intensity 2.500 cd/lm

Required components:

C14636_XTM-PF-ADAPTER

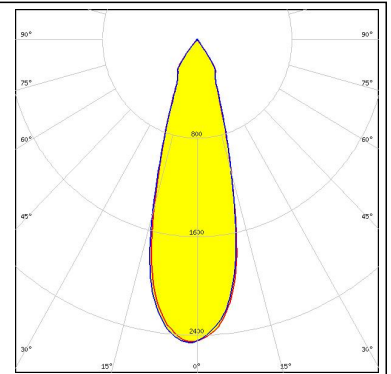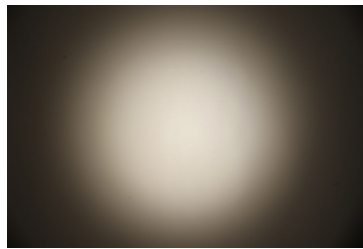


PHOTOMETRIC DATA (SIMULATED):

bridgelux.

LED V10 Gen7
FWHM 31.0°
Efficiency 90 %
Peak intensity 2.450 cd/lm

Required components:

C13709_PF-SOCKET-VERO13-18
Bender Wirth: 434 Typ L1

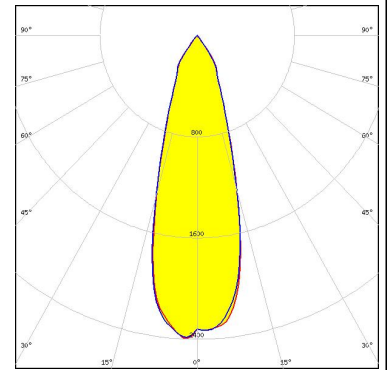

bridgelux.

LED VERO10
FWHM 30.0°
Efficiency %
Peak intensity cd/lm

Required components:

bridgelux.

LED VERO13
FWHM 34.0°
Efficiency %
Peak intensity cd/lm

Required components:

bridgelux.

LED VERO18
FWHM 43.0°
Efficiency %
Peak intensity cd/lm

Required components:

PHOTOMETRIC DATA (SIMULATED):

CREE

LED CXA/B 15xx
FWHM 28.0°
Efficiency %
Peak intensity cd/lm
Required components:

LUMILEDS

LED LUXEON CoB Compact
FWHM 20.0°
Efficiency 92 %
Peak intensity 4.100 cd/lm
Required components:
C13761_PF-SOCKET-CXA15

LUMINUS

LED CXM-14
FWHM 41.0°
Efficiency 87 %
Peak intensity 1.600 cd/lm
Required components:
C13709_PF-SOCKET-VERO13-18
Bender Wirth: 433 Typ L1

LUMINUS

LED CXM-9
FWHM 32.0°
Efficiency 88 %
Peak intensity 2.300 cd/lm
Required components:
C13709_PF-SOCKET-VERO13-18
Bender Wirth: 434 Typ L1

PHOTOMETRIC DATA (SIMULATED):

OSRAM
Opto Semiconductors

LED Soleriq S15

FWHM 39.0°


Efficiency 90 %

Peak intensity 1.810 cd/lm

Required components:

C13709_PF-SOCKET-VERO13-18

Bender Wirth: 433 Typ L1

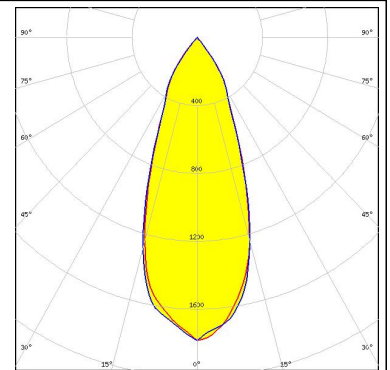

SAMSUNG

LED LC010C

FWHM 23.0°


Efficiency 90 %

Peak intensity 3.500 cd/lm

Required components:

C13709_PF-SOCKET-VERO13-18

Bender Wirth: 479 Typ L1

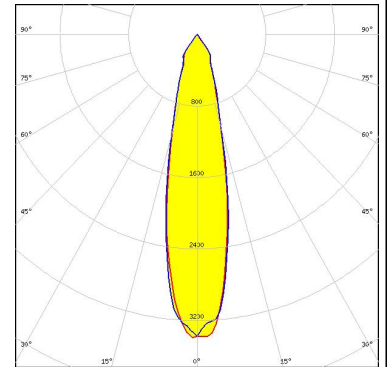

SAMSUNG

LED LC020C

FWHM 27.0°


Efficiency 89 %

Peak intensity 2.900 cd/lm

Required components:

C13709_PF-SOCKET-VERO13-18

Bender Wirth: 479 Typ L1

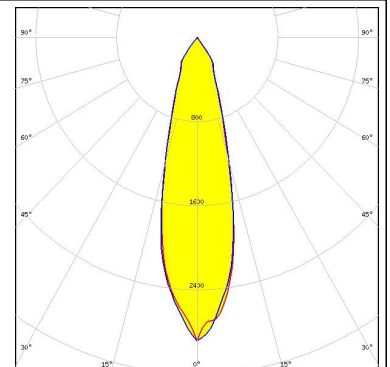

SAMSUNG

LED LC040C

FWHM 33.0°


Efficiency 85 %

Peak intensity 2.100 cd/lm


Required components:

C13709_PF-SOCKET-VERO13-18

Bender Wirth: 480 Typ L1

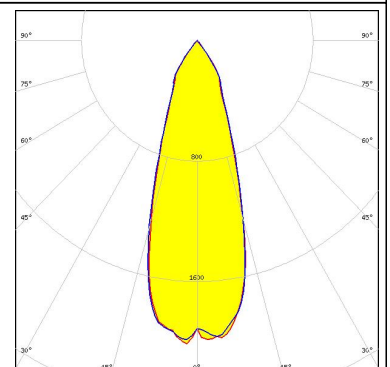

PHOTOMETRIC DATA (SIMULATED):

 SEOL SEMICONDUCTOR	
LED	ZC12/18
FWHM	41.0°
Efficiency	87 %
Peak intensity	1.600 cd/lm
Required components:	
C13709_PF-SOCKET-VERO13-18	
Bender Wirth: 433 Typ L1	
<hr/>	
 SEOL SEMICONDUCTOR	
LED	ZC4/6
FWHM	32.0°
Efficiency	88 %
Peak intensity	2.300 cd/lm
Required components:	
C13709_PF-SOCKET-VERO13-18	
Bender Wirth: 434 Typ L1	

GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

Due to use of high power COB's with this product, special attention to proper thermal design is highly recommended. LEDiL has no liability for direct, indirect or consecutive damages arising from the LEDiL products being used outside of the recommended temperature range.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDiL Oy

Joensuunkatu 13
FI-24240 SALO
Finland

LEDiL Inc.

228 West Page Street
Suite D
Sycamore IL 60178
USA

Local sales and technical support

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)

Shipping locations

Salo, Finland
Hong Kong, China

Distribution Partners

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)