
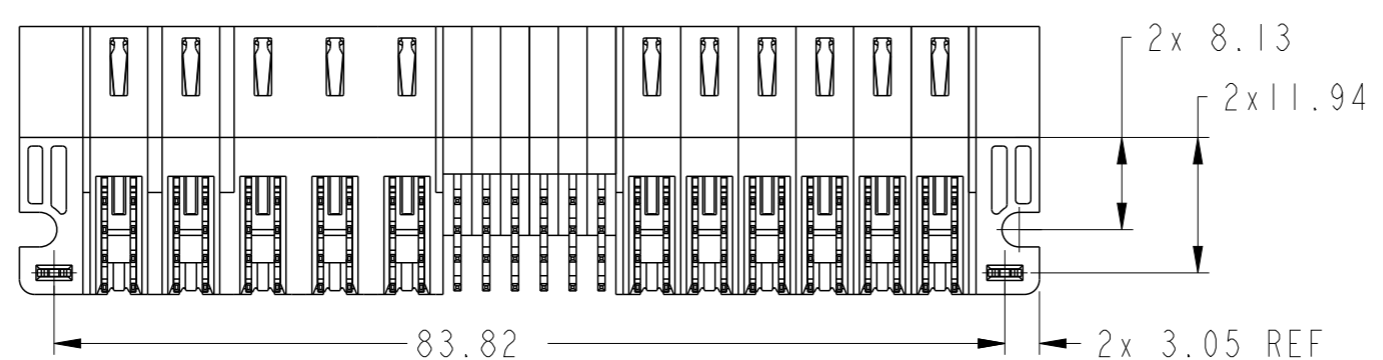
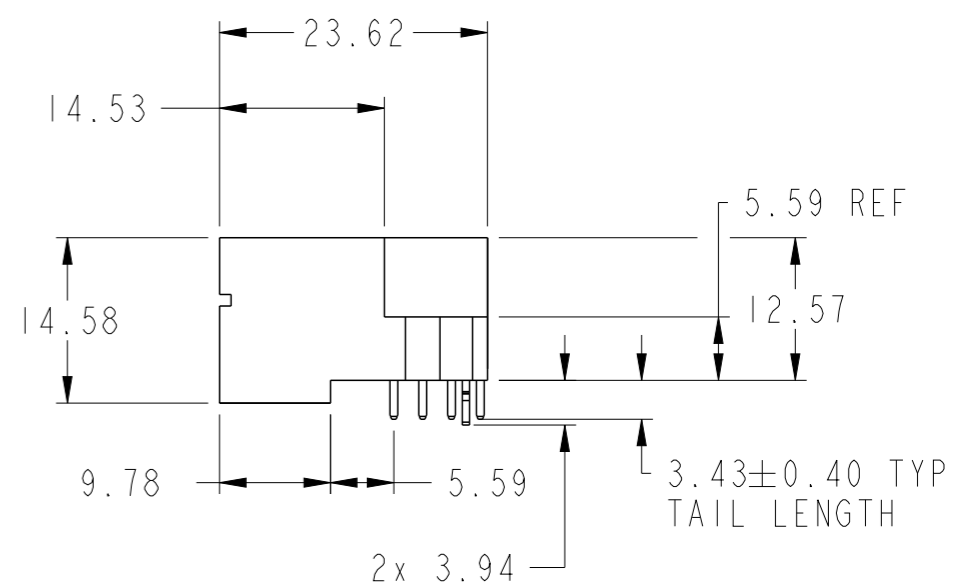
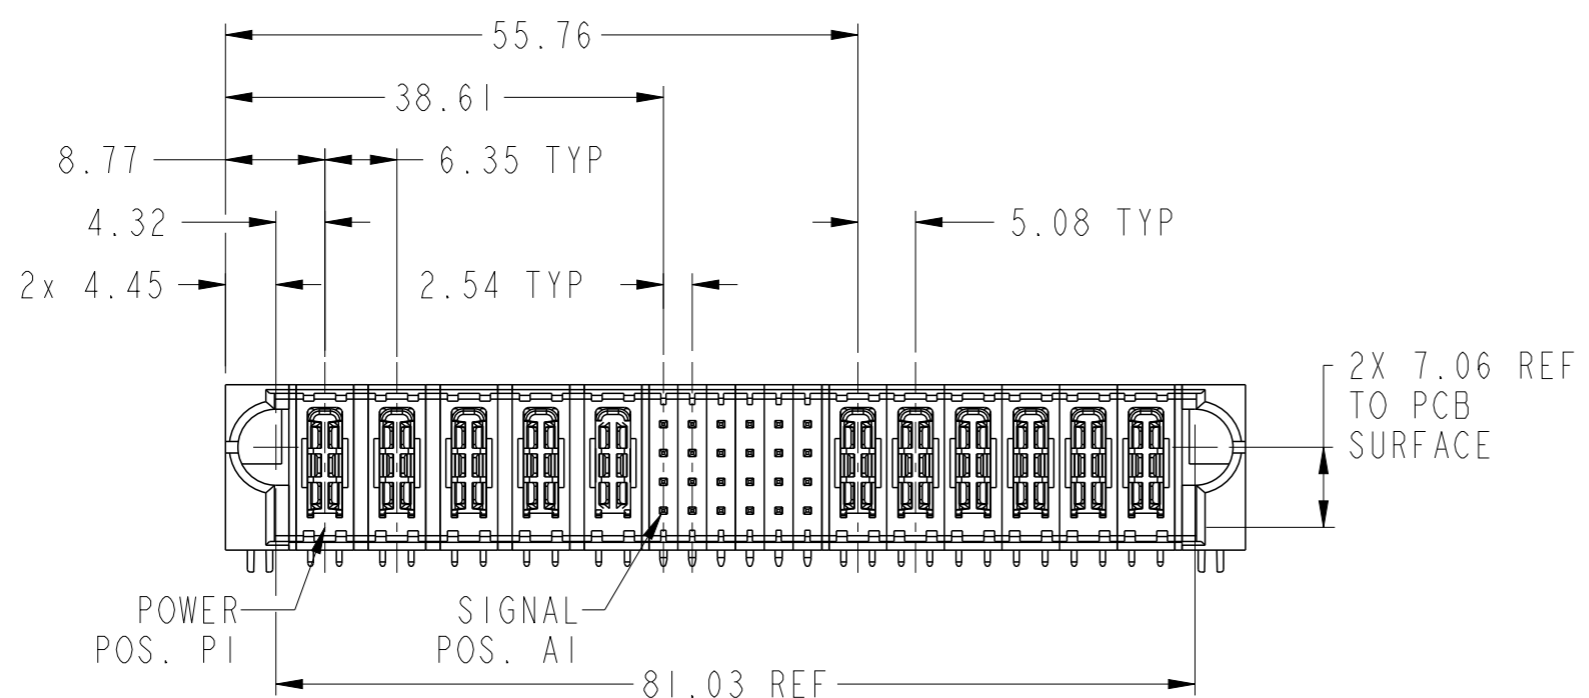


PRODUCT NUMBER SEE SHEET 2

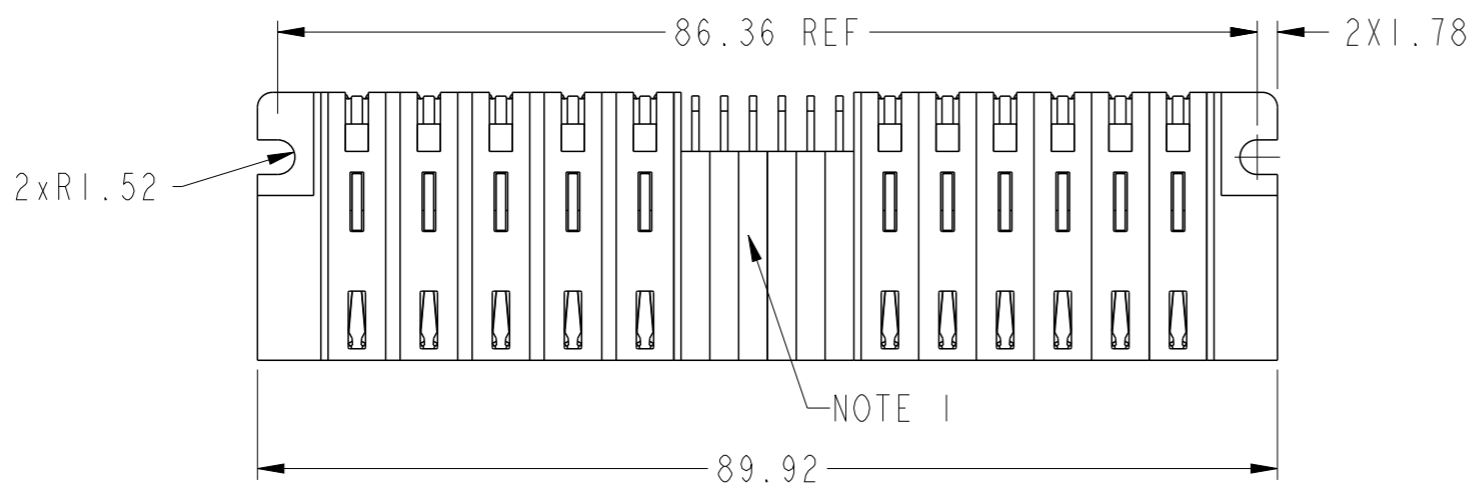


spec ref	*	dr	Rainbow Zhan	2014/06/10	projection	MM	size	A3	scale	3:2	
tolerance std	ASME Y14.5	eng	Rainbow Zhan	2016/09/12			ecn no	ELX-DG-24930-1			
TOLERANCES UNLESS OTHERWISE SPECIFIED		chr	Fancy Zhang	2016/09/14			product family	PwrBlade+	rel level	Released	
surface	linear	appr	Pei-Ming Zheng	2016/09/14	5HP + 24S + 6HDP		dwg no	10106262-B006002		rev	B
ASME Y14.5	angular	www.fci.com		cat. no.	RA STB HEADER		Product - Customer Drw		sheet 1 of 3		

Amphenol FCI

© 2016 AFCI

PRODUCT NO.	ROWS	HIGH POWER					SIGNAL						HIGH POWER					E2		
		E1	P1	P2	P3	P4	P5	1	2	3	4	5	6	P6	P7	P8	P9		P10	P11
10106262-B006002LF	DCBA	HA	H1	H1	H1	H1	H1	UUUUUU	UUUUUU	UUUUUU	UUUUUU	UUUUUU	UUUUUU	H1	H1	H1	H1	H1	H1	HA

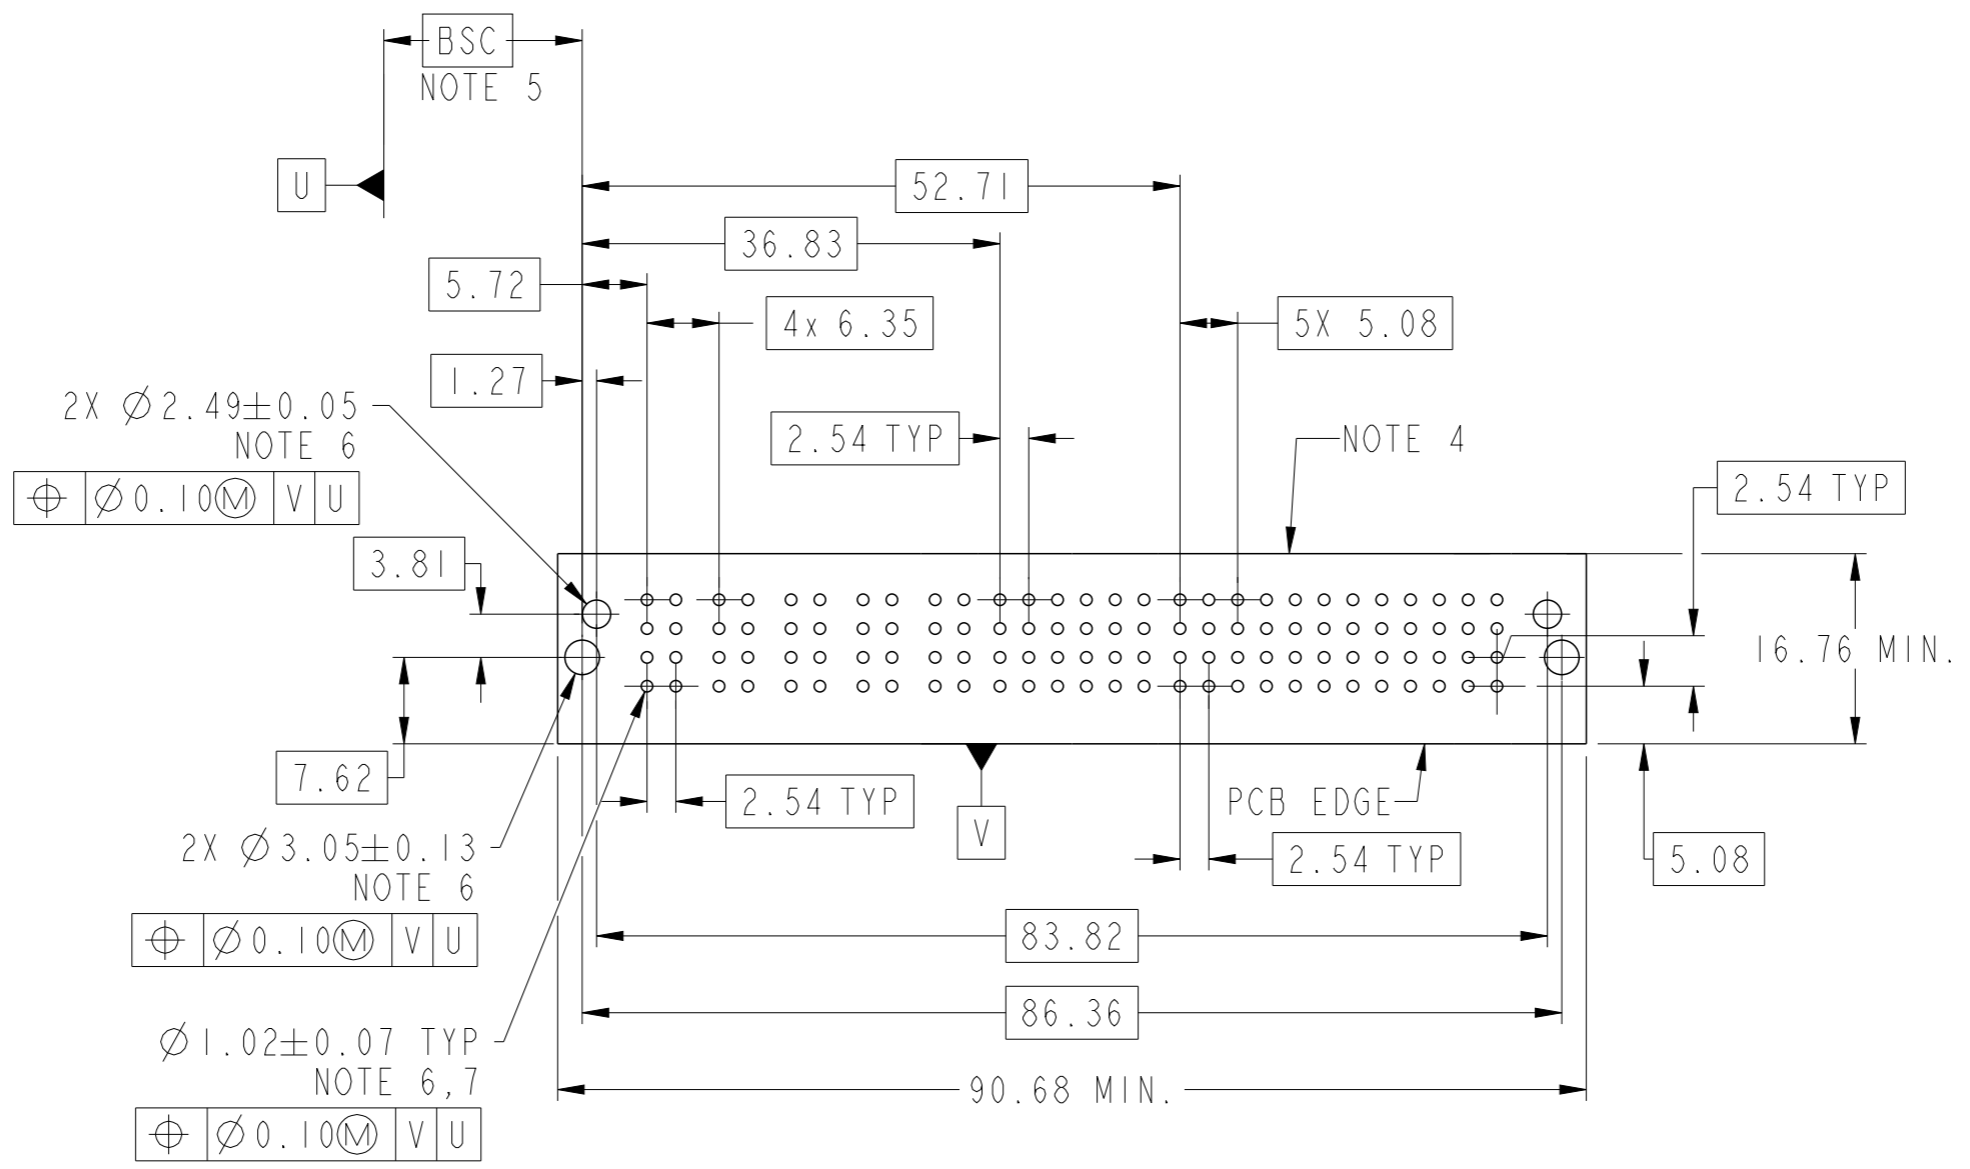

Amphenol
FCi

© 2016 AFCI

CODE	DESCRIPTION
E	MLBF SIGNAL CONTACT, ROW A (3.43)
HI	STD HIGH POWER CONTACT (3.43)
HA	METAL HOLD DOWN
R	STD SIGNAL CONTACT, ROW A (3.43)
S	STD SIGNAL CONTACT, ROW B (3.43)
T	STD SIGNAL CONTACT, ROW C (3.43)
U	STD SIGNAL CONTACT, ROW D (3.43)

spec ref	*	dr	Rainbow Zhan	2014/06/10	projection	MM	size	A3	scale	3:2	
tolerance std	ASME Y14.5	eng	Rainbow Zhan	2016/09/12			ecn no	ELX-DG-24930-1			
TOLERANCES UNLESS OTHERWISE SPECIFIED		chr	Fancy Zhang	2016/09/14			product family	PwrBlade+	rel level	Released	
surface	linear	appr	Pei-Ming Zheng	2016/09/14			dwg no	10106262-B006002		rev	B
ASME Y14.5	angular	www.fci.com		cat. no.	Product - Customer Drw		sheet 2 of 3				

NOTES:

- 1) PRODUCT MARK:
PART NUMBER AND DATE CODE TO BE MARKED ON THIS SURFACE .
THE MARK CAN BE OMITTED IF THERE IS NOT ENOUGH SPACE ON THIS SURFACE.
- 2) MATERIALS:
-HOUSING : HIGH TEMP THERMOPLASTIC WITH GLASS FIBER, UL94V-0, BLACK.
-POWER CONTACT : HIGH CONDUCTIVITY COPPER ALLOY.
-SIGNAL CONTACT : COPPER ALLOY.
- 3) PLATING SPECIFICATION : 10116351
- 4) DENOTES CONNECTOR KEEP OUT ZONE.
- 5) DATUM AND BASIC DIMENIONS ARE ESTABLISHED BY CUSTOMER.
- 6) ALL HOLE DIAMETERS ARE FINISHED HOLE SIZES.
- 7) 1.15+/-0.025MM DRILLED HOLE PLATED WITH 0.00762MM MIN SN
OVER 0.0254-0.0762MM CU PLATING TO ACHIEVE A 1.02+/-0.07MM HOLE.
- 8) THE HOUSING WILL WITHSTAND EXPOSURE TO 265 °C PEAK TEMPERATURE
FOR 10 SECONDS IN A WAVE SOLDER APPLICATION.
- 9) THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY
REGULATIONS AS DESCRIBED IN GS-47-0004.
- 10) PRODUCT SPECIFICATION : GS-12-658.
APPLICATION SPECIFICATION : GS-20-141.
PRODUCT PACKAGE SPECIFICATION: GS-14-1502.

Amphenol
FCi

© 2016 AFCI

spec ref *		dr	Rainbow Zhan	2014/06/10	projection	MM	size	A3	scale	3:2	
tolerance std	ASME Y14.5	TOLERANCES UNLESS OTHERWISE SPECIFIED					ecn no ELX-DG-24930-1				
ASME Y14.5		eng	Rainbow Zhan	2016/09/12			rel level Released				
ASME Y14.5		chr	Fancy Zhang	2016/09/14			product family PwrBlade+				
surface	linear	0.X	±0.5		5HP + 24S + 6HDP			10106262-B006002			B
		0.XX	±0.25		RA STB HEADER						
		0.XXX	±0.10								
ASME Y14.5	angular	0°	±2°	www.fci.com	cat. no.	Product - Customer Drw		sheet 3 of 3			