
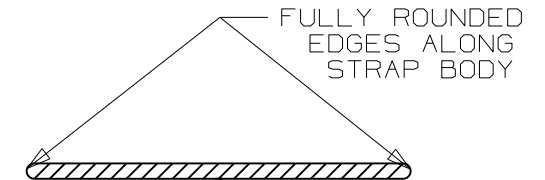
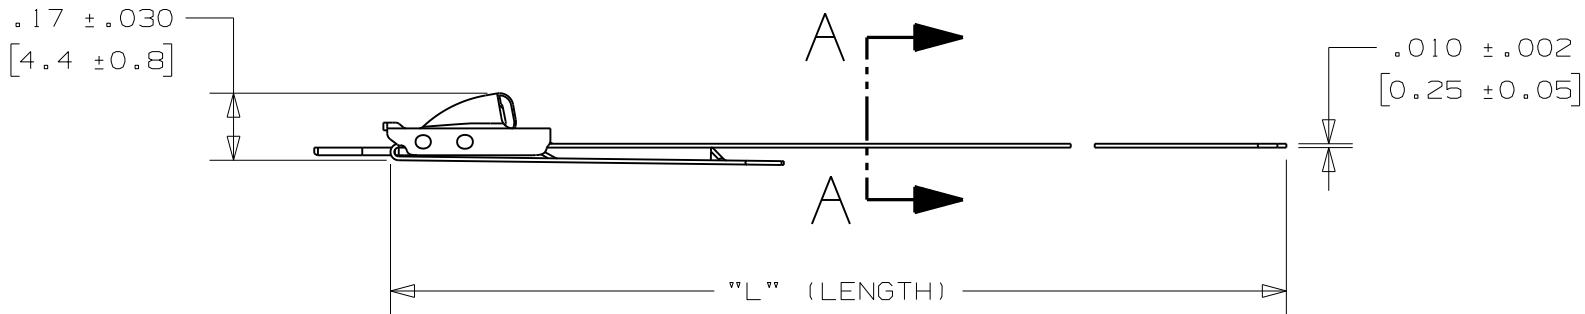


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART NO.	PACKAGE QTY	MAX BUNDLE DIAMETER	LENGTH "L" +/- .3" [7]
MRS1.5LH-L6	50	1.5" [38]	10.6" (269)
MRS2LH-L6	50	2.0" [51]	12.2" (310)
MRS4LH-L6	50	4.0" [102]	18.5" (470)
MRS6LH-L6	50	6.0" [152]	24.8" (630)

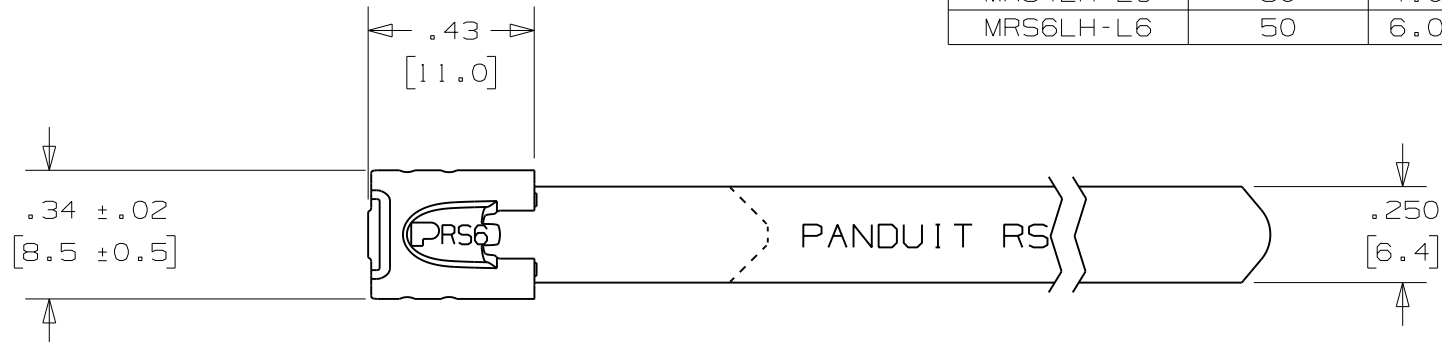


SECTION A - A
SCALE 8:1

NOTES:

1. APPLICATION TOOLS - MRTLS & PRT
2. MINIMUM LOOP TENSILE STRENGTH - 225 LBS. (1000 NEWTONS) WHEN TESTED ON A 1.5" MANDREL.
3. [] DENOTES DIMENSION IN MILLIMETERS
4. TOLERANCES:
 .XXX = ±.010 [.25] .XX = ±.02 [.5]
 .X = ±.03 [.8] ANGLES = ±2°
5. MATERIAL: 316 STAINLESS STEEL

04A10/09MIMSKB	REV	DATE	BY	CHK	DESCRIPTION
					REVISED PART LENGTHS FOR IMPROVED APPLICATION TOOL PERFORMANCE

TM



TINLEY PARK, ILLINOIS

METAL TIE - LIGHT-HEAVY SERIES
RETAINED TENSION - 360° RADIAL SEAL
316 STAINLESS STEEL - CUSTOMER DRAWING

DRAWN BY JAMB	CHK'D EJD	SCALE 2:1	DRAWING NO. N41262BS_DC
------------------	--------------	--------------	----------------------------