

THIS ITEM IS AVAILABLE WITH GROUP 'A' TESTING FOR RELIABILITY LEVEL 'L' & 'M' IN ACCORDANCE WITH TABLE V MIL-R-39016D. FOR THIS OPTION ADD 'L' OR 'M' TO PART NUMBER (i.e. CAW-1C-6BL)

COIL:


RESISTANCE	40 OHMS ± 10%
NOMINAL VOLTAGE	6.0 VDC
MUST OPERATE	3.5 VDC
MUST RELEASE	.45 VDC

ENVIRONMENT:

VIBRATION	10	CPS TO	2000	CPS @	20	g's
SHOCK	100	g's	5	MS. DURATION		
TEMPERATURE	-65	°C TO	+125	°C		

NOTES: DIELECTRIC 1000 VRMS EXCEPT 500 VRMS ACROSS OPEN CONTACTS.

CUSTOMER DATA SHEET

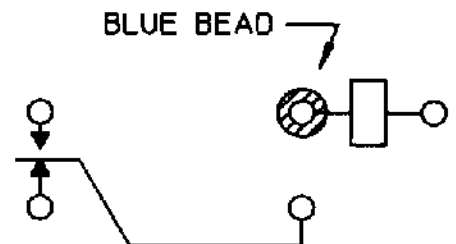

CONTACT RATING: 10 AMP/28 VDC
RESISTIVE 50,000 OPERATIONS

DR. R.B. 5/12/93 CK. JAW 5-12-93



CUST. C. I. I. STD.
CUST. NO.

TYPE 'C' RELAY

CAW-1C-6B