


EMIPAK-1B PressFit Power Module Neutral Point Clamp Topology, 30 A



EMIPAK-1B
(package example)

FEATURES

- Ultrafast Trench IGBT technology
- HEXFRED® and silicon carbide diode technology
- PressFit pins technology
- Exposed Al₂O₃ substrate with low thermal resistance
- Low internal inductances
- PressFit pins locking technology. Patent # US.263.820 B2
- UL approved file E78996 
- Material categorization: for definitions of compliance please see www.vishay.com/doc?99912



RoHS
COMPLIANT

| PRODUCT SUMMARY | |
|--|---------------------------------------|
| TRENCH IGBT 1200 V STAGE | |
| V _{CES} | 1200 V |
| V _{CE(ON)} typical at I _C = 30 A | 2.12 V |
| I _C at T _C = 102 °C | 30 A |
| TRENCH IGBT 600 V STAGE | |
| V _{CES} | 600 V |
| V _{CE(ON)} typical at I _C = 30 A | 1.42 V |
| I _C at T _C = 106 °C | 30 A |
| Speed | 8 kHz to 30 kHz |
| Package | EMIPAK-1B |
| Circuit | 3-levels neutral point clamp topology |

DESCRIPTION

VS-ENQ030L120S is an integrated solution for a neutral point clamp topology in a single package. The EMIPAK-1B package is easy to use thanks to the PressFit pins and the exposed substrate provides improved thermal performance. The optimized layout also helps to minimize stray parameters, allowing for better EMI performance.

| ABSOLUTE MAXIMUM RATINGS | | | | |
|-----------------------------------|--------------------------------|---|-------------|-------|
| PARAMETER | SYMBOL | TEST CONDITIONS | MAX. | UNITS |
| Operating junction temperature | T _J | | 150 | °C |
| Storage temperature range | T _{Stg} | | -40 to +150 | |
| RMS isolation voltage | V _{ISOL} | T _J = 25 °C, all terminals shorted, f = 50 Hz, t = 1 s | 3500 | V |
| Q1 - Q4 TRENCH IGBT 1200 V | | | | |
| Collector to emitter voltage | V _{CES} | | 1200 | V |
| Gate to emitter voltage | V _{GES} | | ± 30 | |
| Pulsed collector current | I _{CM} | | 120 | A |
| Clamped inductive load current | I _{LM} ⁽¹⁾ | | 120 | |
| Continuous drain current | I _C | T _C = 25 °C | 61 | A |
| | | T _C = 80 °C | 40 | |
| | | T _{SINK} = 80 °C | 21 | |
| Power dissipation | P _D | T _C = 25 °C | 216 | W |
| | | T _C = 80 °C | 121 | |

PATENT(S): www.vishay.com/patents

This Vishay product is protected by one or more United States and International patents.



| ABSOLUTE MAXIMUM RATINGS | | | | |
|---|----------------|--|------|-------|
| PARAMETER | SYMBOL | TEST CONDITIONS | MAX. | UNITS |
| Q2 - Q3 TRENCH IGBT 600 V | | | | |
| Collector to emitter voltage | V_{CES} | | 600 | V |
| Gate to emitter voltage | V_{GES} | | ± 20 | |
| Pulsed collector current | I_{CM} | | 130 | A |
| Clamped inductive load current | $I_{LM}^{(2)}$ | | 130 | |
| Continuous collector current | I_C | $T_C = 25\text{ °C}$ | 64 | A |
| | | $T_C = 80\text{ °C}$ | 42 | |
| | | $T_{SINK} = 80\text{ °C}$ | 25 | |
| Power dissipation | P_D | $T_C = 25\text{ °C}$ | 174 | W |
| | | $T_C = 80\text{ °C}$ | 97 | |
| D1 - D4 HEXFRED ANTIPARALLEL DIODE | | | | |
| Single pulse forward current | I_{FSM} | 10 ms sine or 6 ms rectangular pulse, $T_J = 25\text{ °C}$ | 180 | A |
| Diode continuous forward current | I_F | $T_C = 25\text{ °C}$ | 46 | A |
| | | $T_C = 80\text{ °C}$ | 30 | |
| | | $T_{SINK} = 80\text{ °C}$ | 17 | |
| Power dissipation | P_D | $T_C = 25\text{ °C}$ | 187 | W |
| | | $T_C = 80\text{ °C}$ | 105 | |
| D2 - D3 SILICON CARBIDE ANTIPARALLEL DIODE | | | | |
| Single pulse forward current | I_{FSM} | 10 ms sine or 6 ms rectangular pulse, $T_J = 25\text{ °C}$ | 150 | A |
| Diode continuous forward current | I_F | $T_C = 25\text{ °C}$ | 40 | A |
| | | $T_C = 80\text{ °C}$ | 28 | |
| | | $T_{SINK} = 80\text{ °C}$ | 20 | |
| Power dissipation | P_D | $T_C = 25\text{ °C}$ | 140 | W |
| | | $T_C = 80\text{ °C}$ | 79 | |

Notes

- Absolute Maximum Ratings indicate sustained limits beyond which damage to the device may occur.
- (1) $V_{CC} = 600\text{ V}$, $V_{GE} = 15\text{ V}$, $L = 500\text{ }\mu\text{H}$, $R_g = 4.7\text{ }\Omega$, $T_J = 150\text{ °C}$
- (2) $V_{CC} = 300\text{ V}$, $V_{GE} = 15\text{ V}$, $L = 500\text{ }\mu\text{H}$, $R_g = 4.7\text{ }\Omega$, $T_J = 150\text{ °C}$

| ELECTRICAL SPECIFICATIONS ($T_J = 25\text{ °C}$ unless otherwise noted) | | | | | | |
|--|--------------------------------|---|------|-------|-------|-------|
| PARAMETER | SYMBOL | TEST CONDITIONS | MIN. | TYP. | MAX. | UNITS |
| Q1 - Q4 TRENCH IGBT 1200 V | | | | | | |
| Collector to emitter breakdown voltage | BV_{CES} | $V_{GE} = 0\text{ V}$, $I_C = 100\text{ }\mu\text{A}$ | 1200 | - | - | V |
| Collector to emitter voltage | $V_{CE(ON)}$ | $V_{GE} = 15\text{ V}$, $I_C = 30\text{ A}$ | - | 2.12 | 2.52 | |
| | | $V_{GE} = 15\text{ V}$, $I_C = 30\text{ A}$, $T_J = 125\text{ °C}$ | - | 2.31 | - | |
| Gate threshold voltage | $V_{GE(th)}$ | $V_{CE} = V_{GE}$, $I_C = 1.0\text{ mA}$ | 2.6 | 4.6 | 6.6 | |
| Temperature coefficient of threshold voltage | $\Delta V_{GE(th)}/\Delta T_J$ | $V_{CE} = V_{GE}$, $I_C = 1\text{ mA}$ (25 °C to 125 °C) | - | - 14 | - | mV/°C |
| Forward transconductance | g_{fe} | $V_{CE} = 20\text{ V}$, $I_C = 30\text{ A}$ | - | 36 | - | S |
| Transfer characteristics | V_{GE} | $V_{CE} = 20\text{ V}$, $I_C = 30\text{ A}$ | - | 7.1 | - | V |
| Zero gate voltage collector current | I_{CES} | $V_{GE} = 0\text{ V}$, $V_{CE} = 1200\text{ V}$ | - | 0.001 | 0.23 | mA |
| | | $V_{GE} = 0\text{ V}$, $V_{CE} = 1200\text{ V}$, $T_J = 125\text{ °C}$ | - | 0.5 | - | |
| Gate to emitter leakage current | I_{GES} | $V_{GE} = \pm 30\text{ V}$, $V_{CE} = 0\text{ V}$ | - | - | ± 200 | nA |



| ELECTRICAL SPECIFICATIONS ($T_J = 25\text{ }^\circ\text{C}$ unless otherwise noted) | | | | | | |
|---|--------------------------------|--|------|--------|-----------|----------------------|
| PARAMETER | SYMBOL | TEST CONDITIONS | MIN. | TYP. | MAX. | UNITS |
| Q2 - Q3 TRENCH IGBT 600 V | | | | | | |
| Collector to emitter breakdown voltage | BV_{CES} | $V_{GE} = 0\text{ V}, I_C = 150\text{ }\mu\text{A}$ | 600 | - | - | V |
| Collector to emitter voltage | $V_{CE(ON)}$ | $V_{GE} = 15\text{ V}, I_C = 30\text{ A}$ | - | 1.42 | 1.87 | |
| | | $V_{GE} = 15\text{ V}, I_C = 30\text{ A}, T_J = 125\text{ }^\circ\text{C}$ | - | 1.56 | - | |
| Gate threshold voltage | $V_{GE(th)}$ | $V_{CE} = V_{GE}, I_C = 1.4\text{ mA}$ | 3.6 | 5.6 | 7.1 | |
| Temperature coefficient of threshold voltage | $\Delta V_{GE(th)}/\Delta T_J$ | $V_{CE} = V_{GE}, I_C = 1\text{ mA}$ ($25\text{ }^\circ\text{C}$ to $125\text{ }^\circ\text{C}$) | - | -17 | - | mV/ $^\circ\text{C}$ |
| Forward transconductance | g_{fe} | $V_{CE} = 20\text{ V}, I_C = 30\text{ A}$ | - | 24 | - | S |
| Transfer characteristics | V_{GE} | $V_{CE} = 20\text{ V}, I_C = 30\text{ A}$ | - | 10 | - | V |
| Zero gate voltage collector current | I_{CES} | $V_{GE} = 0\text{ V}, V_{CE} = 600\text{ V}$ | - | 0.0003 | 0.23 | mA |
| | | $V_{GE} = 0\text{ V}, V_{CE} = 600\text{ V}, T_J = 125\text{ }^\circ\text{C}$ | - | 0.028 | - | |
| Gate to emitter leakage current | I_{GES} | $V_{GE} = \pm 20\text{ V}, V_{CE} = 0\text{ V}$ | - | - | ± 200 | nA |
| D1 - D4 ANTIPARALLEL DIODE | | | | | | |
| Forward voltage drop | V_{FM} | $I_F = 20\text{ A}$ | - | 2.42 | 3.18 | V |
| | | $I_F = 20\text{ A}, T_J = 125\text{ }^\circ\text{C}$ | - | 2.32 | - | |
| D2 - D3 ANTIPARALLEL DIODE | | | | | | |
| Forward voltage drop | V_{FM} | $I_F = 20\text{ A}$ | - | 1.54 | 1.8 | V |
| | | $I_F = 20\text{ A}, T_J = 125\text{ }^\circ\text{C}$ | - | 1.86 | - | |

| SWITCHING CHARACTERISTICS ($T_J = 25\text{ }^\circ\text{C}$ unless otherwise noted) | | | | | | |
|---|--------------|---|------------|------|------|-------|
| PARAMETER | SYMBOL | TEST CONDITIONS | MIN. | TYP. | MAX. | UNITS |
| Q1 - Q4 TRENCH IGBT (WITH FREEWHEELING D1 - D4 ANTIPARALLEL DIODE) | | | | | | |
| Total gate charge (turn-on) | Q_g | $I_C = 30\text{ A}$ $V_{CC} = 600\text{ V}$ $V_{GE} = 15\text{ V}$ | - | 157 | - | nC |
| Gate to emitter charge (turn-on) | Q_{ge} | | - | 21 | - | |
| Gate to collector charge (turn-on) | Q_{gc} | | - | 69 | - | |
| Turn-on switching loss | E_{ON} | $I_C = 30\text{ A}$ $V_{CC} = 600\text{ V}$ $V_{GE} = 15\text{ V}$ $R_g = 4.7\text{ }\Omega$ $L = 500\text{ }\mu\text{H}$ ⁽¹⁾ | - | 0.52 | - | mJ |
| Turn-off switching loss | E_{OFF} | | - | 0.9 | - | |
| Total switching loss | E_{TOT} | | - | 1.42 | - | |
| Turn-on delay time | $t_{d(on)}$ | | ns | - | 93 | - |
| Rise time | t_r | | | - | 39 | - |
| Turn-off delay time | $t_{d(off)}$ | | | - | 133 | - |
| Fall time | t_f | - | | 156 | - | |
| Turn-on switching loss | E_{ON} | $I_C = 30\text{ A}$ $V_{CC} = 600\text{ V}$ $V_{GE} = 15\text{ V}$ $R_g = 4.7\text{ }\Omega$ $L = 500\text{ }\mu\text{H}$ $T_J = 125\text{ }^\circ\text{C}$ ⁽¹⁾ | | - | 0.64 | - |
| Turn-off switching loss | E_{OFF} | | - | 1.61 | - | |
| Total switching loss | E_{TOT} | | - | 2.24 | - | |
| Turn-on delay time | $t_{d(on)}$ | | ns | - | 93 | - |
| Rise time | t_r | | | - | 39 | - |
| Turn-off delay time | $t_{d(off)}$ | | | - | 136 | - |
| Fall time | t_f | - | | 193 | - | |
| Input capacitance | C_{ies} | $V_{GE} = 0\text{ V}$ $V_{CC} = 30\text{ V}$ $f = 1\text{ MHz}$ | - | 3338 | - | pF |
| Output capacitance | C_{oes} | | - | 124 | - | |
| Reverse transfer capacitance | C_{res} | | - | 75 | - | |
| Reverse bias safe operating area | RBSOA | $T_J = 150\text{ }^\circ\text{C}, I_C = 120\text{ A}, V_{CC} = 600\text{ V}, V_P = 1200\text{ V}, R_g = 4.7\text{ }\Omega, V_{GE} = 15\text{ V to }0\text{ V}$ | Fullsquare | | | |



| SWITCHING CHARACTERISTICS ($T_J = 25\text{ }^\circ\text{C}$ unless otherwise noted) | | | | | | |
|---|--------------|--|------------|------|------|-------|
| PARAMETER | SYMBOL | TEST CONDITIONS | MIN. | TYP. | MAX. | UNITS |
| Q2 - Q3 TRENCH IGBT (WITH FREEWHEELING EXTERNAL TO-247 DIODE DISCRETE 30ETH06) | | | | | | |
| Total gate charge (turn-on) | Q_g | $I_C = 48\text{ A}$ $V_{CC} = 400\text{ V}$ $V_{GE} = 15\text{ V}$ | - | 95 | - | nC |
| Gate to emitter charge (turn-on) | Q_{ge} | | - | 28 | - | |
| Gate to collector charge (turn-on) | Q_{gc} | | - | 35 | - | |
| Turn-on switching loss | E_{ON} | $I_C = 30\text{ A}$ $V_{CC} = 300\text{ V}$ $V_{GE} = 15\text{ V}$ $R_g = 4.7\text{ }\Omega$ $L = 500\text{ }\mu\text{H}^{(1)}$ | - | 0.23 | - | mJ |
| Turn-off switching loss | E_{OFF} | | - | 0.26 | - | |
| Total switching loss | E_{TOT} | | - | 0.49 | - | |
| Turn-on delay time | $t_{d(on)}$ | | - | 70 | - | ns |
| Rise time | t_r | | - | 31 | - | |
| Turn-off delay time | $t_{d(off)}$ | | - | 91 | - | |
| Fall time | t_f | | - | 87 | - | |
| Turn-on switching loss | E_{ON} | $I_C = 30\text{ A}$ $V_{CC} = 300\text{ V}$ $V_{GE} = 15\text{ V}$ $R_g = 4.7\text{ }\Omega$ $L = 500\text{ }\mu\text{H}$ $T_J = 125\text{ }^\circ\text{C}^{(1)}$ | - | 0.33 | - | mJ |
| Turn-off switching loss | E_{OFF} | | - | 0.48 | - | |
| Total switching loss | E_{TOT} | | - | 0.61 | - | |
| Turn-on delay time | $t_{d(on)}$ | | - | 70 | - | ns |
| Rise time | t_r | | - | 31 | - | |
| Turn-off delay time | $t_{d(off)}$ | | - | 96 | - | |
| Fall time | t_f | | - | 117 | - | |
| Input capacitance | C_{ies} | $V_{GE} = 0\text{ V}$ $V_{CC} = 30\text{ V}$ $f = 1\text{ MHz}$ | - | 3025 | - | pF |
| Output capacitance | C_{oes} | | - | 245 | - | |
| Reverse transfer capacitance | C_{res} | | - | 90 | - | |
| Reverse bias safe operating area | RBSOA | $T_J = 150\text{ }^\circ\text{C}$, $I_C = 130\text{ A}$ $V_{CC} = 300\text{ V}$, $V_P = 600\text{ V}$ $R_g = 4.7\text{ }\Omega$, $V_{GE} = 15\text{ V to }0\text{ V}$ | Fullsquare | | | |
| D1 - D4 ANTIPARALLEL DIODE | | | | | | |
| Diode reverse recovery time | t_{rr} | $V_R = 400\text{ V}$ $I_F = 20\text{ A}$ $di/dt = 500\text{ A}/\mu\text{s}$ | - | 103 | - | ns |
| Diode peak reverse current | I_{rr} | | - | 16 | - | A |
| Diode recovery charge | Q_{rr} | | - | 800 | - | nC |
| Diode reverse recovery time | t_{rr} | $V_R = 400\text{ V}$ $I_F = 20\text{ A}$ $di/dt = 500\text{ A}/\mu\text{s}$, $T_J = 125\text{ }^\circ\text{C}$ | - | 135 | - | ns |
| Diode peak reverse current | I_{rr} | | - | 21 | - | A |
| Diode recovery charge | Q_{rr} | | - | 1412 | - | nC |
| D2 - D3 ANTIPARALLEL DIODE | | | | | | |
| Diode reverse recovery time | t_{rr} | $V_R = 200\text{ V}$ $I_F = 20\text{ A}$ $di/dt = 500\text{ A}/\mu\text{s}$ | - | 30 | - | ns |
| Diode peak reverse current | I_{rr} | | - | 4.8 | - | A |
| Diode recovery charge | Q_{rr} | | - | 73 | - | nC |
| Diode reverse recovery time | t_{rr} | $V_R = 200\text{ V}$ $I_F = 20\text{ A}$ $di/dt = 500\text{ A}/\mu\text{s}$, $T_J = 125\text{ }^\circ\text{C}$ | - | 31 | - | ns |
| Diode peak reverse current | I_{rr} | | - | 5 | - | A |
| Diode recovery charge | Q_{rr} | | - | 78 | - | nC |

Note

(1) Energy losses include "tail" and diode reverse recovery.



| INTERNAL NTC - THERMISTOR SPECIFICATIONS | | | | |
|--|--------------------|--|------------|-------|
| PARAMETER | SYMBOL | TEST CONDITIONS | VALUE | UNITS |
| Resistance | R ₂₅ | T _C = 25 °C | 5000 | Ω |
| | R ₁₀₀ | T _C = 100 °C | 493 ± 5 % | |
| B-value | B _{25/50} | R ₂ = R ₂₅ exp. [B _{25/50} (1/T ₂ - 1/(298.15 K))] | 3375 ± 5 % | K |
| Maximum operating temperature | | | 220 | °C |
| Dissipation constant | | | 2 | mW/°C |
| Thermal time constant | | | 8 | s |

| THERMAL AND MECHANICAL SPECIFICATIONS | | | | | |
|---|----------------------------------|------|------|------|-------|
| PARAMETER | SYMBOL | MIN. | TYP. | MAX. | UNITS |
| Q1 - Q4 TRENCH IGBT 1200 V - Junction to case thermal resistance (per switch) | R _{thJC} | - | - | 0.58 | °C/W |
| Q2 - Q3 TRENCH IGBT 600 V- Junction to case thermal resistance (per switch) | | - | - | 0.72 | |
| D1 - D4 AP diode - Junction to case thermal resistance (per diode) | | - | - | 0.67 | |
| D2 - D3 AP diode - Junction to case thermal resistance (per diode) | | - | - | 0.89 | |
| Q1 - Q4 TRENCH IGBT 1200 V - Case to sink thermal resistance (per switch) | R _{thCS} ⁽¹⁾ | - | 0.75 | - | |
| Q2 - Q3 TRENCH IGBT 600 V - Case to sink thermal resistance (per switch) | | - | 0.77 | - | |
| D1 - D4 AP diode - Case to sink thermal resistance (per diode) | | - | 0.78 | - | |
| D2 - D3 AP diode - Case to sink thermal resistance (per diode) | | - | 0.65 | - | |
| Case to sink thermal resistance (per module) | | - | 0.1 | - | |
| Mounting torque (M4) | | 2 | - | 3 | |
| Weight | | - | 28 | - | g |

Note

⁽¹⁾ Mounting surface flat, smooth, and greased

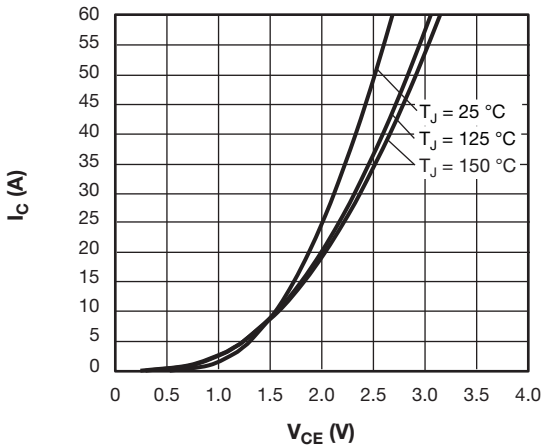


Fig. 1 - Typical Q1 - Q4 Trench IGBT 1200 V Output Characteristics V_{GE} = 15 V

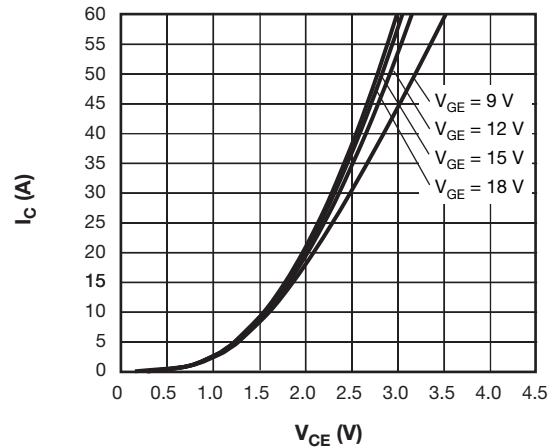


Fig. 2 - Typical Q1 - Q4 Trench IGBT 1200 V Output Characteristics T_J = 125 °C

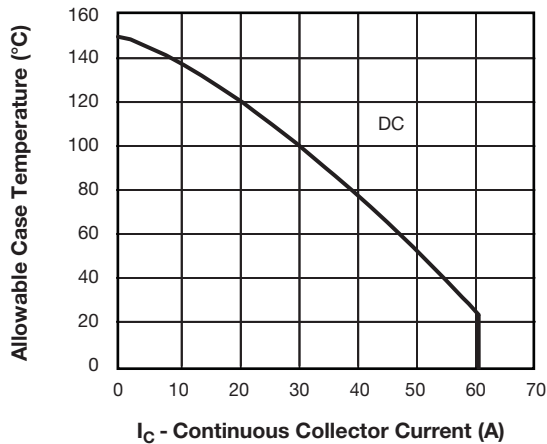


Fig. 3 - Maximum Q1 - Q4 Trench IGBT 1200 V Continuous Collector Current vs. Case Temperature

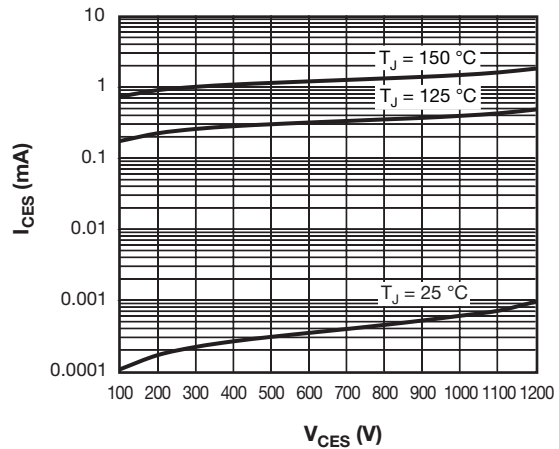


Fig. 6 - Typical Q1 - Q4 Trench IGBT 1200 V Zero Gate Voltage Collector Current

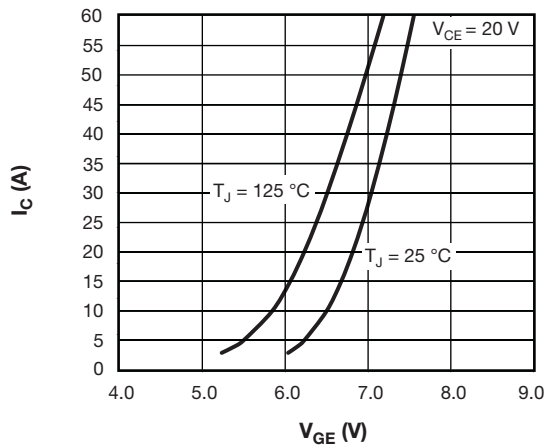


Fig. 4 - Typical Q1 - Q4 Trench IGBT 1200 V Transfer Characteristics

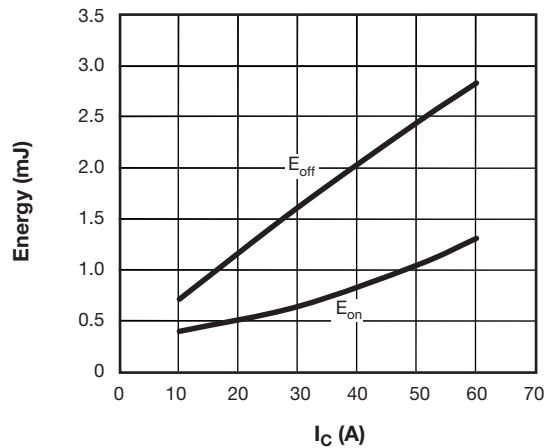


Fig. 7 - Typical Q1 - Q4 Trench IGBT 1200 V Energy Loss vs. I_C (with D1 - D4 Freewheeling Diode), $T_J = 125^\circ\text{C}$, $V_{CC} = 600\text{ V}$, $R_g = 4.7\ \Omega$, $V_{GE} = 15\text{ V}$, $L = 500\ \mu\text{H}$

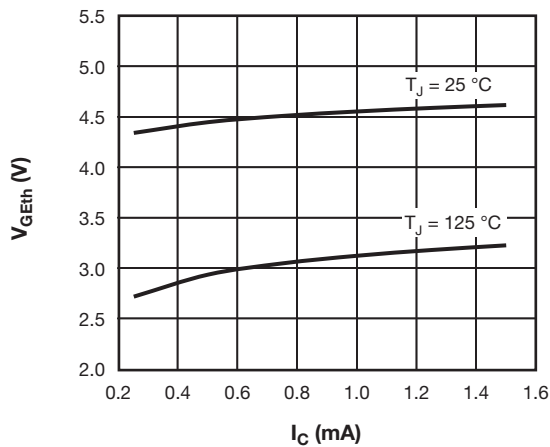


Fig. 5 - Typical Q1 - Q4 Trench IGBT 1200 V Gate Threshold Voltage

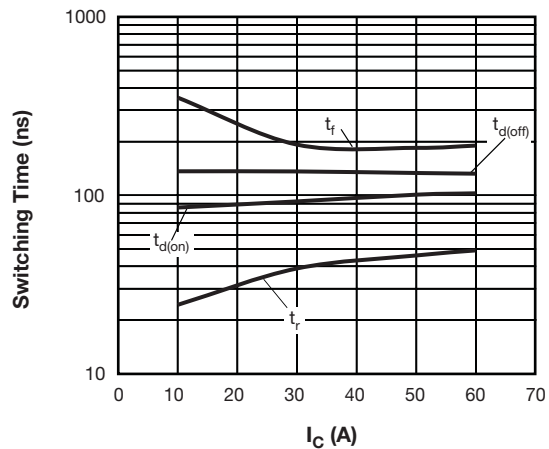


Fig. 8 - Typical Q1 - Q4 Trench IGBT 1200 V Switching Time vs. I_C (with D1 - D4 Freewheeling Diode) $T_J = 125^\circ\text{C}$, $V_{CC} = 600\text{ V}$, $R_g = 4.7\ \Omega$, $V_{GE} = 15\text{ V}$, $L = 500\ \mu\text{H}$

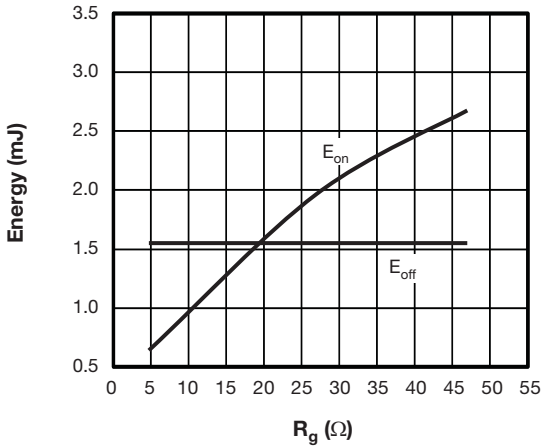


Fig. 9 - Typical Q1 - Q4 Trench IGBT 1200 V Energy Loss vs. R_g (with D1 - D4 Freewheeling Diode)
 $T_J = 125\text{ }^\circ\text{C}$, $V_{CC} = 600\text{ V}$, $I_C = 30\text{ A}$, $V_{GE} = 15\text{ V}$, $L = 500\text{ }\mu\text{H}$

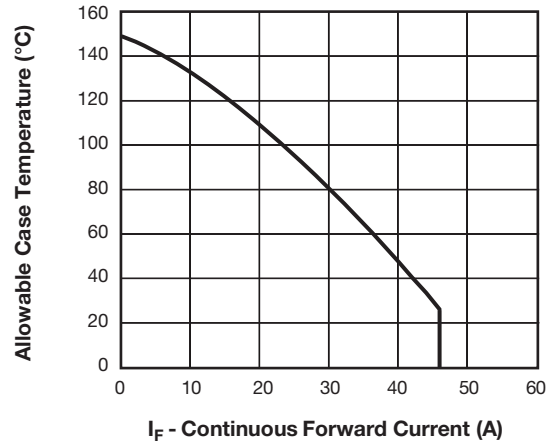


Fig. 12 - Maximum D1 - D4 Antiparallel Diode Forward Current vs. Case Temperature

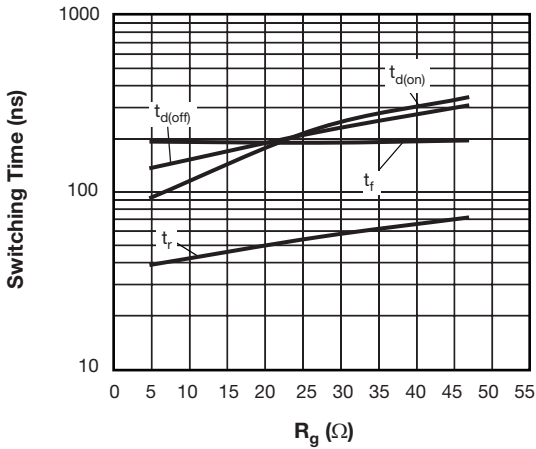


Fig. 10 - Typical Q1 - Q4 Trench IGBT 1200 V Switching Time vs. R_g (with D1 - D4 Freewheeling Diode)
 $T_J = 125\text{ }^\circ\text{C}$, $V_{CC} = 600\text{ V}$, $I_C = 30\text{ A}$, $V_{GE} = 15\text{ V}$, $L = 500\text{ }\mu\text{H}$

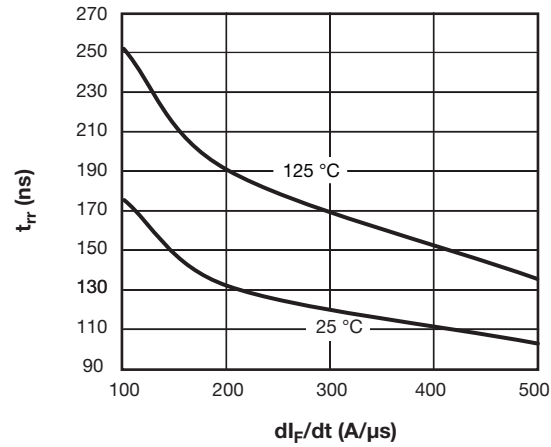


Fig. 13 - Typical D1 - D4 Antiparallel Diode Reverse Recovery Time vs. dI_F/dt
 $V_{rr} = 400\text{ V}$, $I_F = 20\text{ A}$

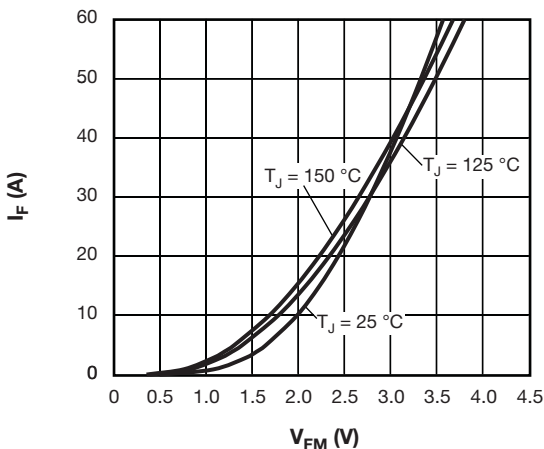


Fig. 11 - Typical D1 - D4 Antiparallel Diode Forward Characteristics

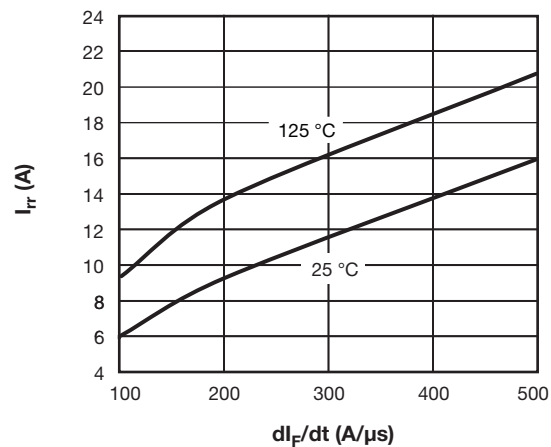


Fig. 14 - Typical D1 - D4 Antiparallel Diode Reverse Recovery Current vs. dI_F/dt
 $V_{rr} = 400\text{ V}$, $I_F = 20\text{ A}$

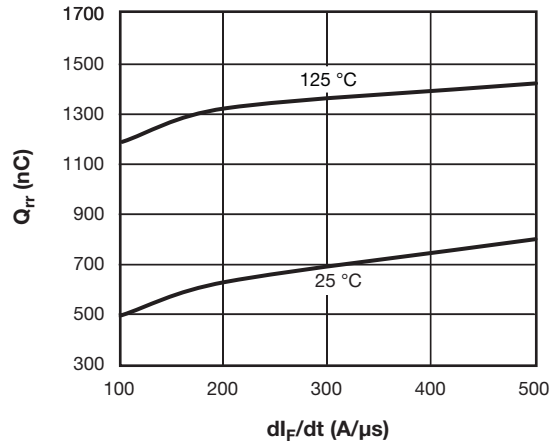


Fig. 15 - Typical D1 - D4 Antiparallel Diode Reverse Recovery Charge vs. di_F/dt
 $V_{rr} = 400$ V, $I_F = 20$ A

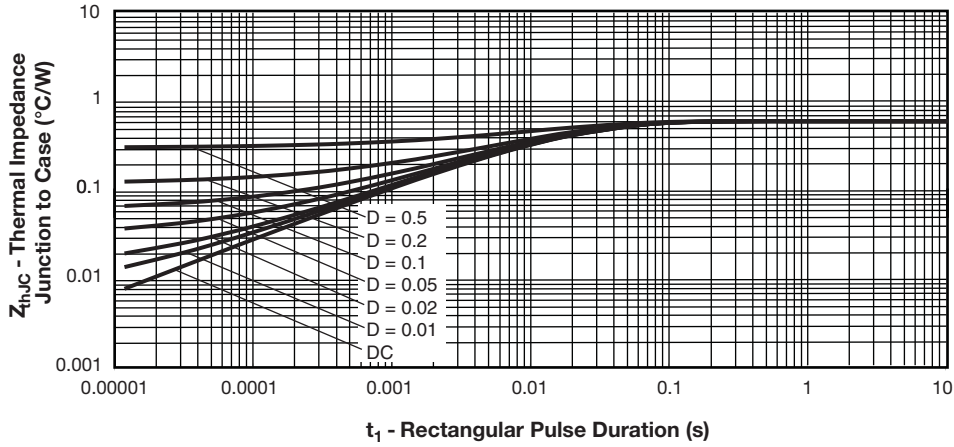


Fig. 16 - Maximum Thermal Impedance Z_{thJC} Characteristics (Q1 - Q4 Trench IGBT 1200 V)

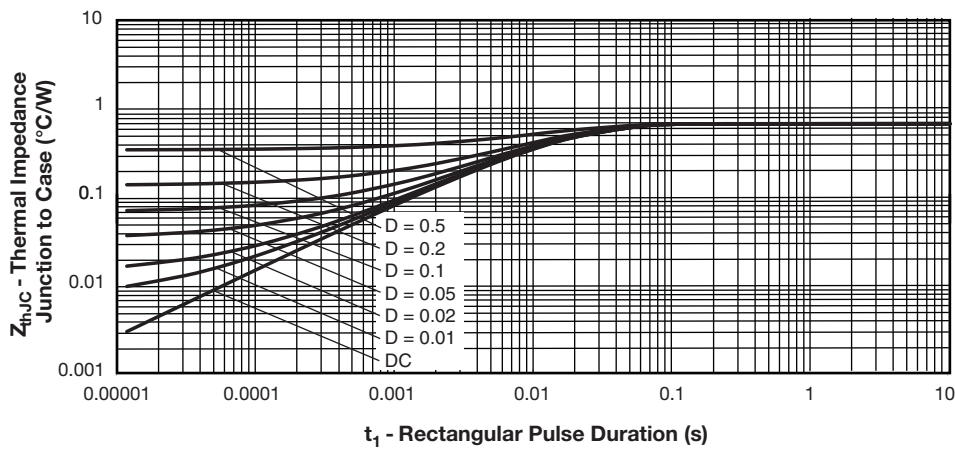


Fig. 17 - Maximum Thermal Impedance Z_{thJC} Characteristics (D1 - D4 Antiparallel Diode)

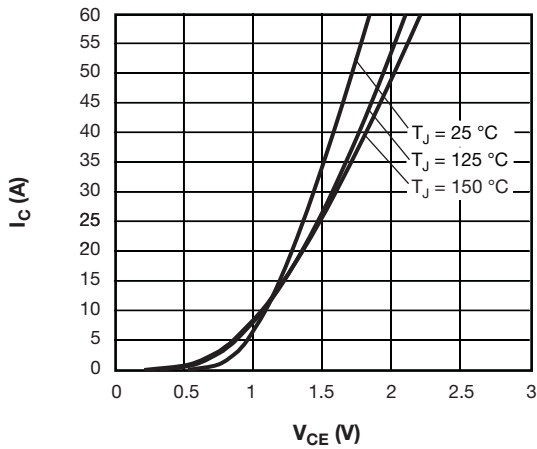


Fig. 18 - Typical Q2 - Q3 Trench IGBT 600 V Output Characteristics
 $V_{GE} = 15 \text{ V}$

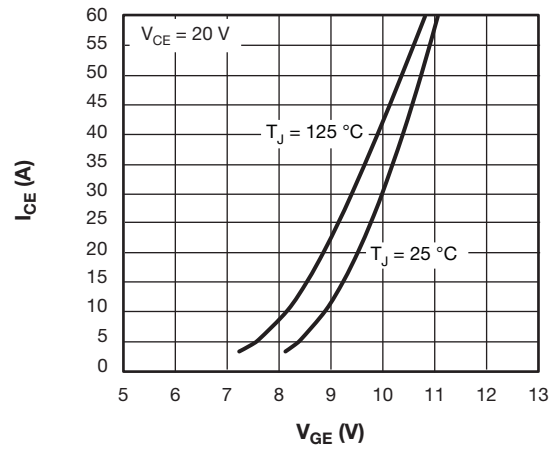


Fig. 21 - Typical Q2 - Q3 Trench IGBT 600 V Transfer Characteristics

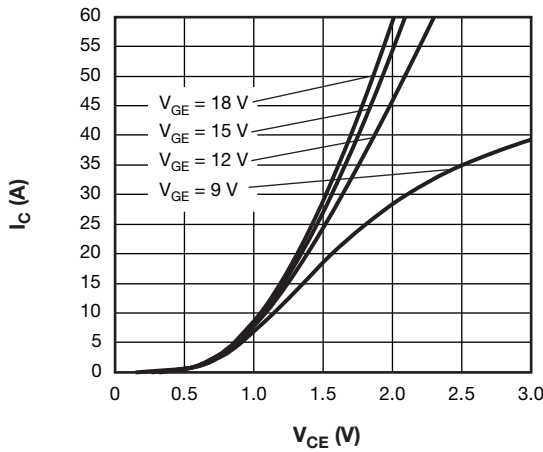


Fig. 19 - Typical Q2 - Q3 Trench IGBT 600 V Output Characteristics
 $T_J = 125 \text{ }^\circ\text{C}$

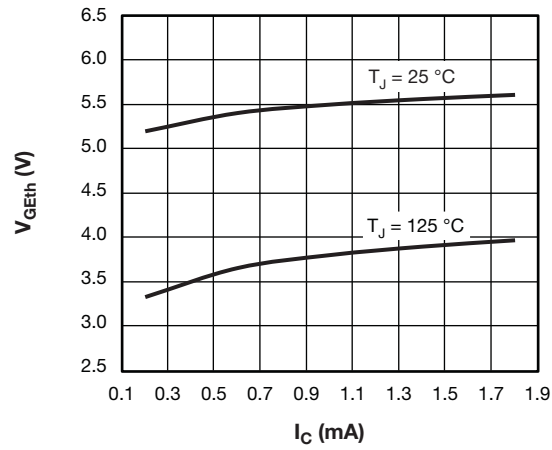


Fig. 22 - Typical Q2 - Q3 Trench IGBT 600 V Gate Threshold Voltage

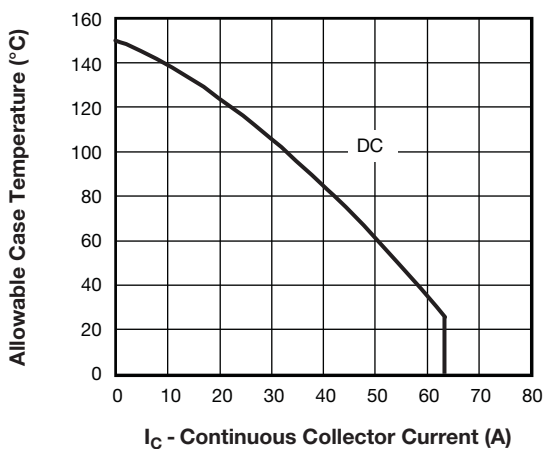


Fig. 20 - Maximum Q2 - Q3 Trench IGBT 600 V Continuous Collector Current vs. Case Temperature

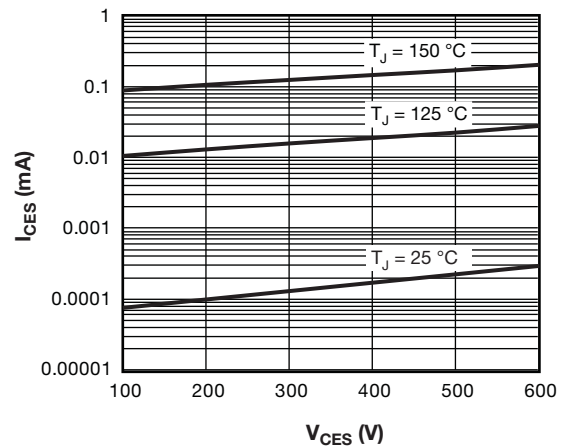


Fig. 23 - Typical Q2 - Q3 Trench IGBT 600 V Zero Gate Voltage Collector Current

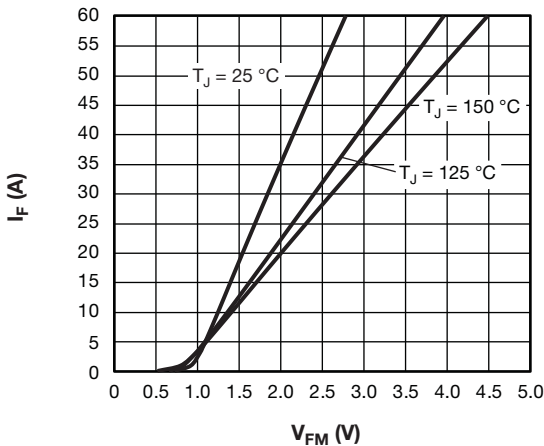


Fig. 24 - Typical D2 - D3 Antiparallel Diode Forward Characteristics

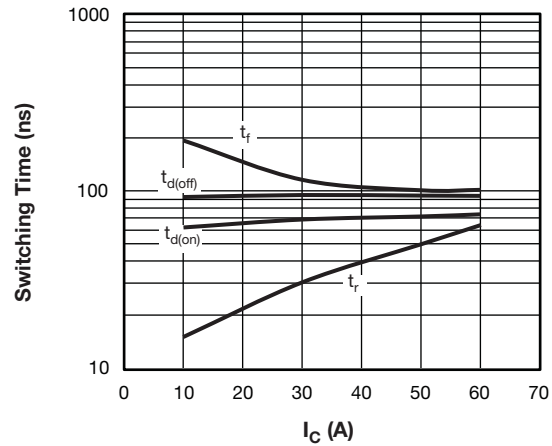


Fig. 27 - Typical Q2 - Q3 Trench IGBT 600 V Switching Time vs. I_C (with Freewheeling External TO-247 Diode Discrete 30ETH06) $T_J = 125\text{ }^\circ\text{C}$, $V_{CC} = 300\text{ V}$, $R_g = 4.7\text{ }\Omega$, $V_{GE} = 15\text{ V}$, $L = 500\text{ }\mu\text{H}$

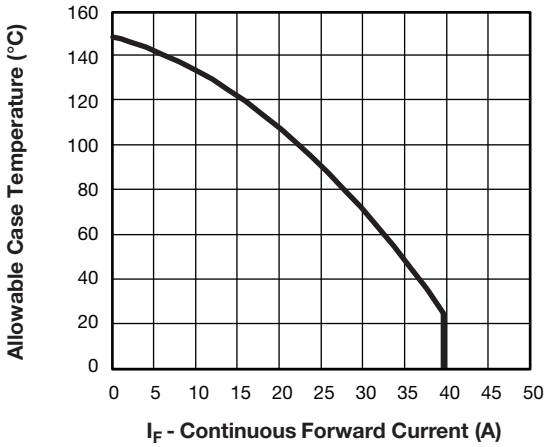


Fig. 25 - Maximum D2 - D3 Antiparallel Diode Forward Current vs. Case Temperature

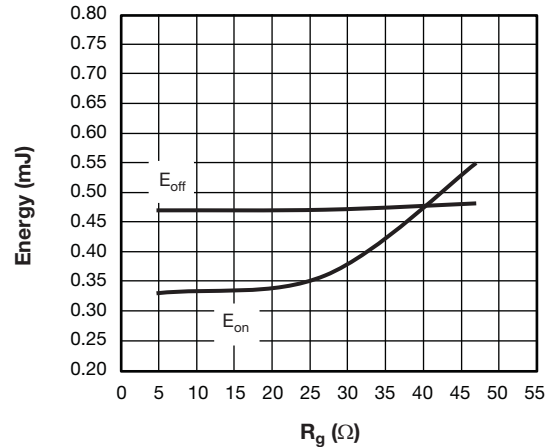


Fig. 28 - Typical Q2 - Q3 Trench IGBT 600 V Energy Loss vs. R_g (with Freewheeling External TO-247 Diode Discrete 30ETH06) $T_J = 125\text{ }^\circ\text{C}$, $V_{CC} = 300\text{ V}$, $I_C = 30\text{ A}$, $V_{GE} = 15\text{ V}$, $L = 500\text{ }\mu\text{H}$

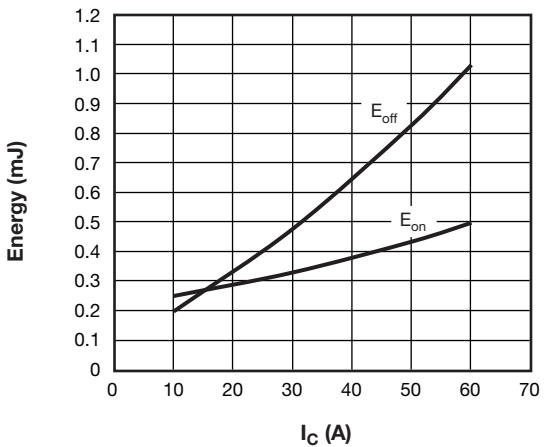


Fig. 26 - Typical Q2 - Q3 Trench IGBT 600 V Energy Loss vs. I_C (with Freewheeling External TO-247 Diode Discrete 30ETH06) $T_J = 125\text{ }^\circ\text{C}$, $V_{CC} = 300\text{ V}$, $R_g = 4.7\text{ }\Omega$, $V_{GE} = 15\text{ V}$, $L = 500\text{ }\mu\text{H}$

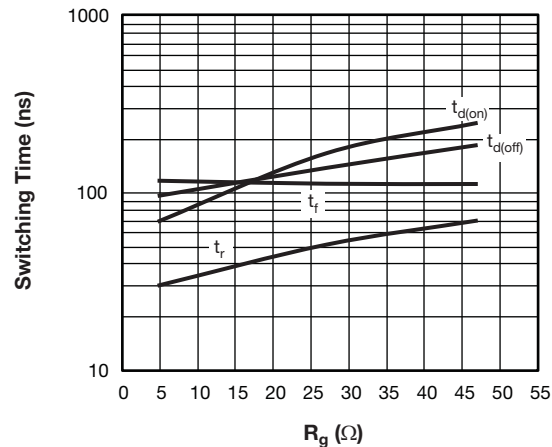


Fig. 29 - Typical Q2 - Q3 Trench IGBT 600 V Switching Time vs. R_g (with Freewheeling External TO-247 Diode Discrete 30ETH06) $T_J = 125\text{ }^\circ\text{C}$, $V_{CC} = 300\text{ V}$, $I_C = 30\text{ A}$, $V_{GE} = 15\text{ V}$, $L = 500\text{ }\mu\text{H}$

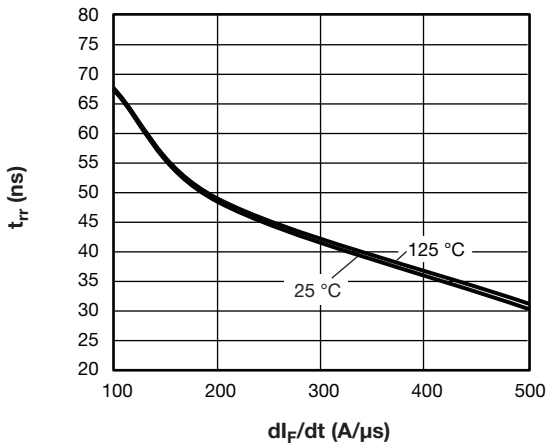


Fig. 30 - Typical D2 - D3 Antiparallel Diode Reverse Recovery Time vs. di_F/dt
 $V_{rr} = 200$ V, $I_F = 20$ A

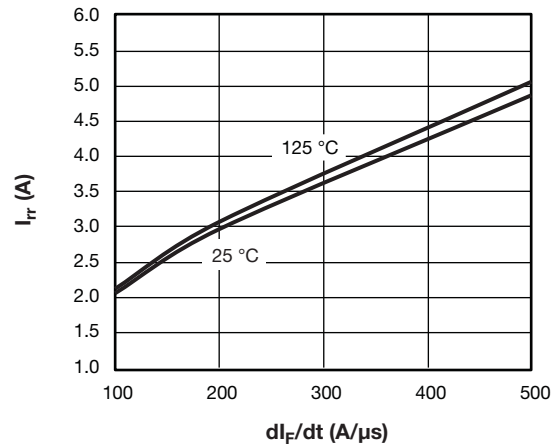


Fig. 31 - Typical D2 - D3 Antiparallel Diode Reverse Recovery Current vs. di_F/dt
 $V_{rr} = 200$ V, $I_F = 20$ A

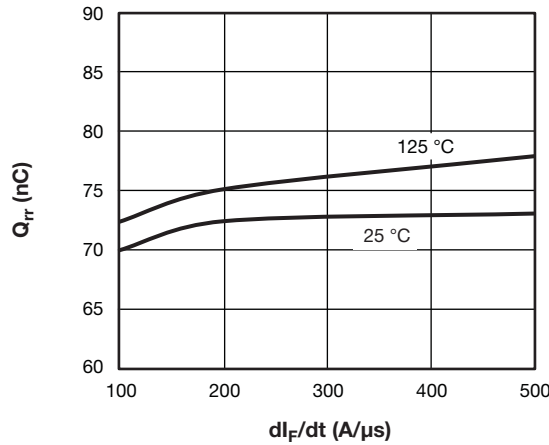


Fig. 32 - Typical D2 - D3 Antiparallel Diode Reverse Recovery Charge vs. di_F/dt
 $V_{rr} = 200$ V, $I_F = 20$ A

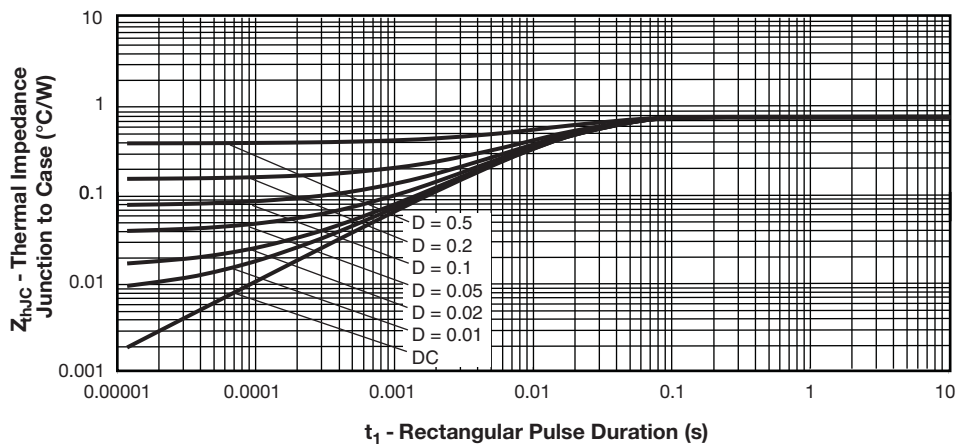
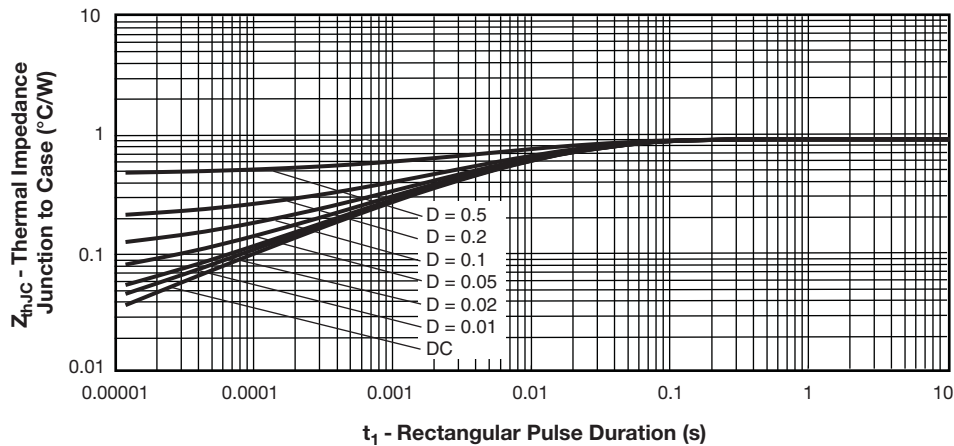


Fig. 33 - Maximum Thermal Impedance Z_{thJC} Characteristics (Q2 - Q3 Trench IGBT 600 V)


 Fig. 34 - Maximum Thermal Impedance Z_{thJC} Characteristics (D2 - D3 Antiparallel Diode)

ORDERING INFORMATION TABLE


| | | | | | | | |
|-------------|------------|-----------|----------|------------|----------|------------|----------|
| Device code | VS- | EN | Q | 030 | L | 120 | S |
| | ① | ② | ③ | ④ | ⑤ | ⑥ | ⑦ |

- 1** - Vishay Semiconductors product
- 2** - Package indicator (EN = EMIPAK-1B)
- 3** - Circuit configuration (Q = neutral point clamp topology)
- 4** - Current rating (030 = 30 A)
- 5** - Switch die technology (L = ultrafast Trench IGBT 1200 V and Trench IGBT 600 V)
- 6** - Voltage rating (120 = 1200 V)
- 7** - Diode die technology (S = SiC diode)



EMIPAK-1B PressFit

DIMENSIONS in millimeters

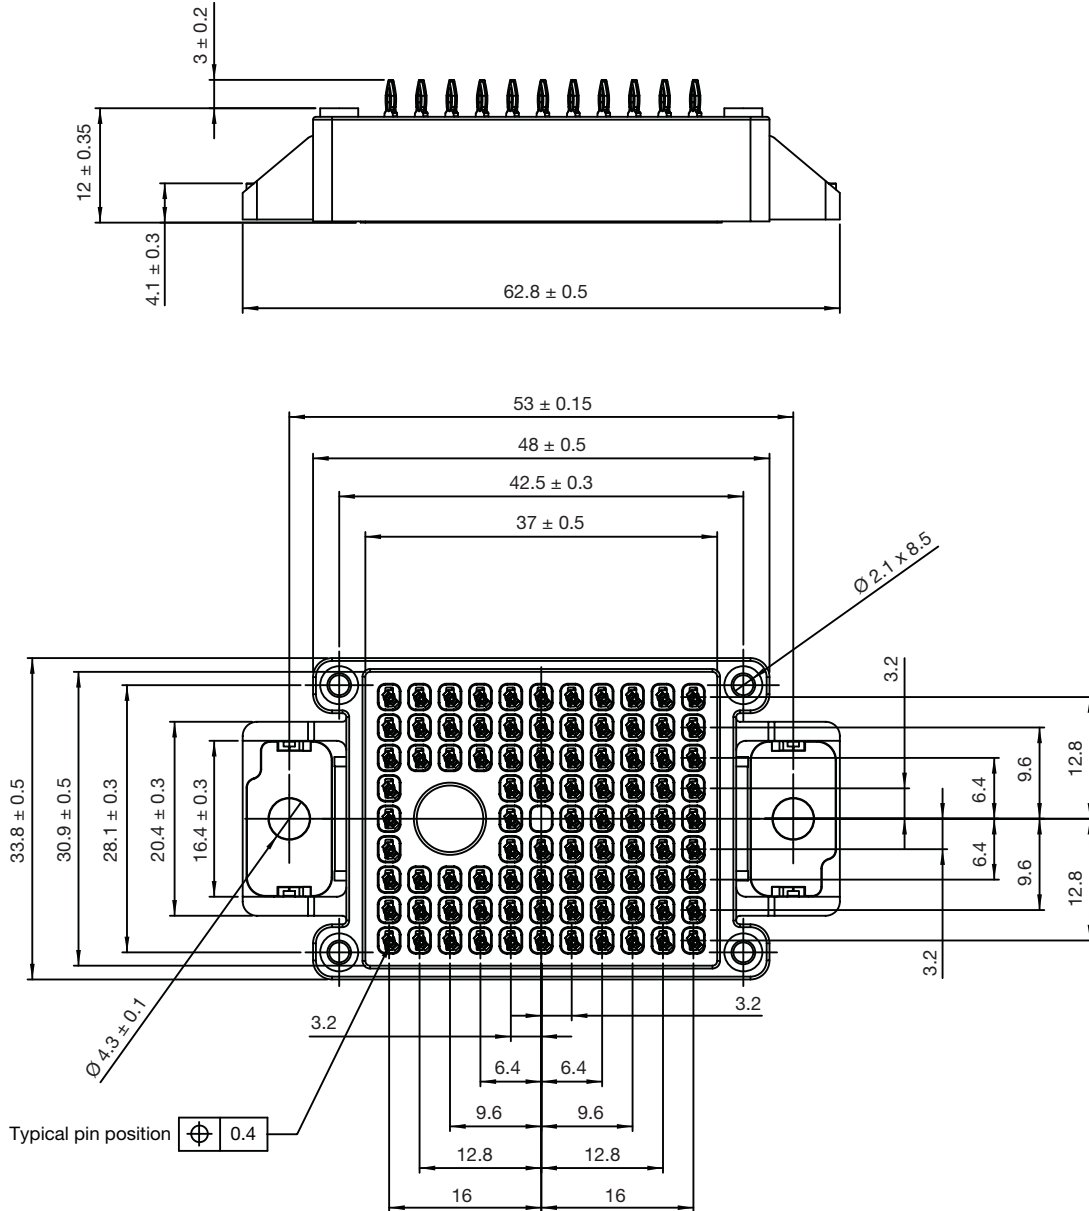



Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.