


ITEM NO.	PART NUMBER	DESCRIPTION	QTY.	COMPONENT NOTES
1	51-00016.M	Connector, PPL7, 4C, 0° plug, 7x38 mm, chrome, solder, Ø2.2-5.2 mm wire, molding style	1	
2	24-00206	Overmold, PPL7 strian relief, 10x24 mm	1	TPU
3	30-00913	Wire, 3C BC, 24 AWG, UL20280, 300V, 80C, 4.5 mm braided shield, FT2, TPU	1	
4	Heat shrink	Black	1	Covers jacket end
5	Heat shrink	Black	1	Covers drain

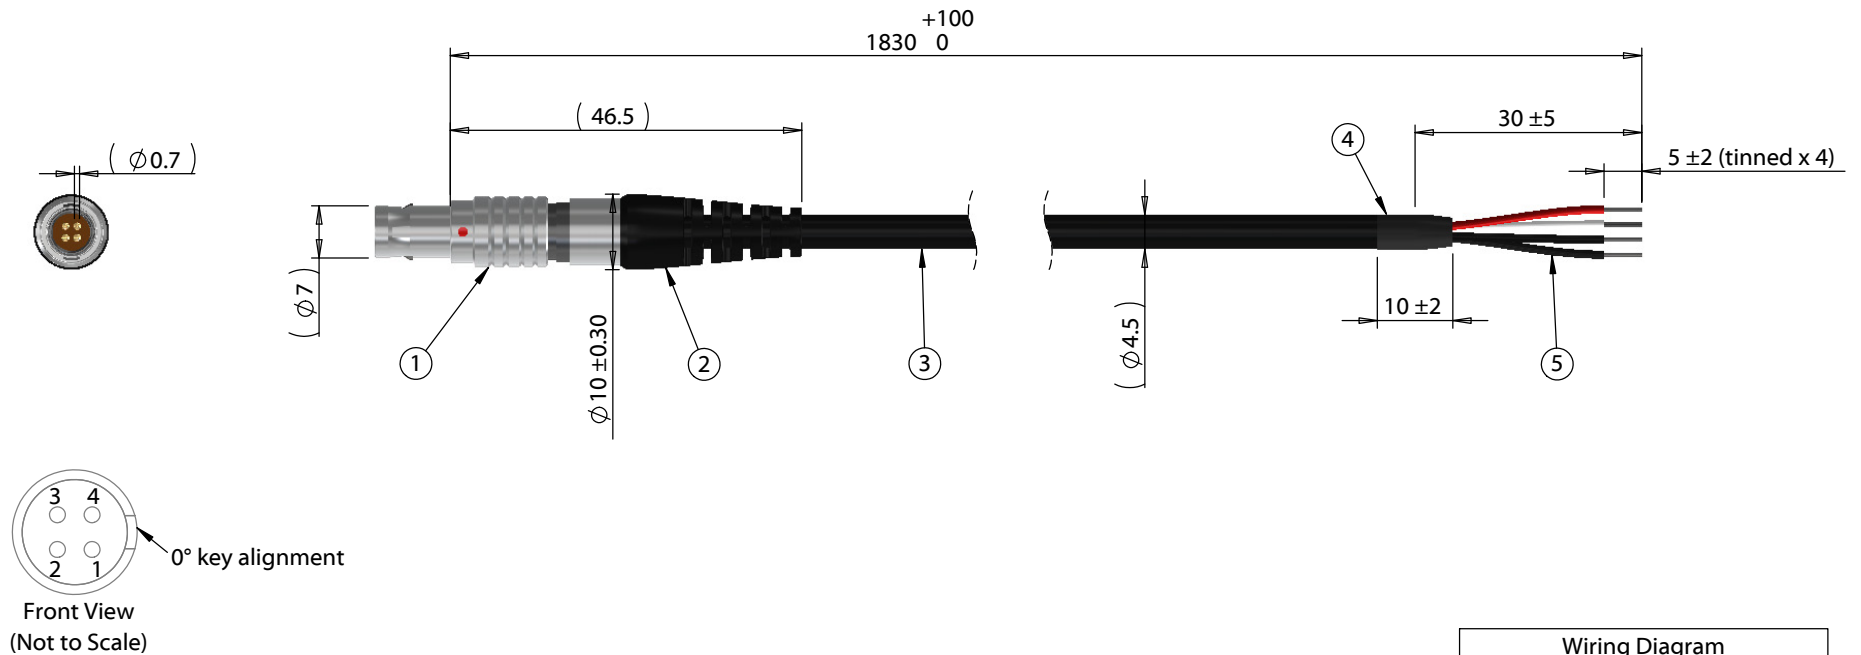

Wiring Diagram	
50-00016.M	wire color
1	Red
2	White
3	Black
4	Drain/Shield

Revision:	Date:	Description:	Prepared:	Notes: RoHS and REACH compliant Function test: no open, no short circuit, no intermittent
A	3/27/2018	Preliminary	Verified:	
			Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm	
			Description:	Cable, 1830 mm, 4C PPL7 plug 51-00016.M, to stripped tinned, 24 AWG, UL20280 30-00913

TENSILITY

tel 1.541.323.3228 800 877.670.7118
fax 1.541.323.4202 web tensility.com

Size: A Part number: 10-02260

Scale: 1:1 Sheet 1 of 1

To see a custom version of this cable assembly, call Tensility at 541-323-3228 or email engineering@tensility.com