
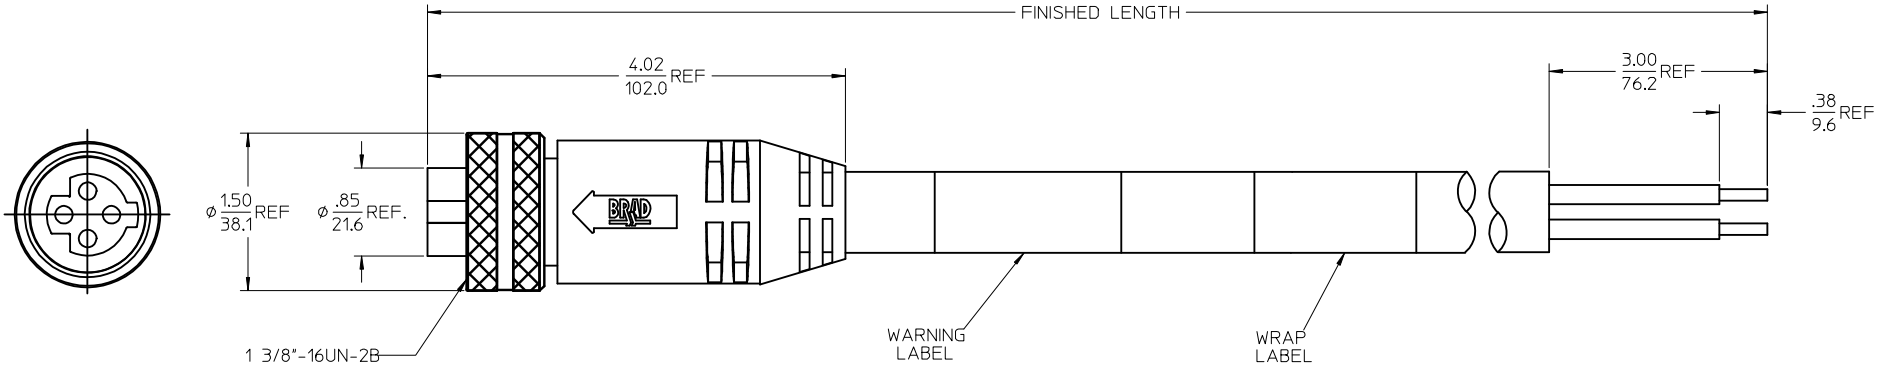


POLES	MATERIAL NO.	ENG. NO.	AMPS	LENGTH
3	1300630056	C03100A48M020	32	2M +89-0MM (6'7"+3.50-0)
4	1300630181	C04100A48M020	32	2M +89-0MM (6'7"+3.50-0)

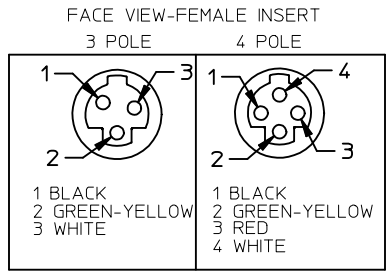

SPECS:
 OVERMOLD: GRAY PVC
 INSERT: BLACK PVC
 COUPLING NUT: ANODIZED ALUMINUM
 CABLE: #10AWG GRAY PVC
 DUAL RATED UL TC/OPEN WIRING & STOOV
 ELECTRICAL: 600V AC/DC

UPDATED PROFILE EC NO: IPG2014-1160 DRAWING: GUSTAFSON 2014/05/09 CHKD: VOU 2014/05/30 APPR: BWOODMAN 2014/05/12	QUALITY SYMBOLS 	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE IN/MM		SCALE 1:1	DESIGN UNITS INCH	THIRD ANGLE PROJECTION	
		4 PLACES ± --- ± --- 3 PLACES ± --- ± --- 2 PLACES ± --- ± --- 1 PLACE ± --- ± --- ANGULAR ± 1/2°	mm INCH ± --- ± --- ± --- ± --- ± --- ± --- ± --- ± ---	DRAWN BY B. RUPERT	DATE 01/12/10	TITLE QUICK CHANGE FEMALE STRAIGHT ALT KEY 3 & 4 POLE AS PORTABLES		MOLEX INCORPORATED	
REV B	DESCRIPTION FEMALE STRAIGHT ALT KEY	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		APPROVED BY JFMURPHY		DATE 2010/01/15	DOCUMENT NO. SD-130063-056		SHEET NO. 1 OF 1
		MATERIAL NO. SEE CHART		SIZE C		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			