


Extended length is with 500g of force

P1	COLOR
1	WHITE
2	ORANGE
3	BLACK
4	RED
5	GREEN
6	YELLOW
7	BLUE
8	BROWN

Material:

- Plug Housing: Polycarbonate, clear
- Plug Terminal: 0.36"[0.14MM] Thick Phosphor Bronze
- Connector: 50µ" of Selective Gold Contact Plating
 - Area, Gold flash over the remainder
 - Over 2.54µm[.000100] thick nickel underplate
- Conductor(X8C): 26AWG (0.12X12) Bare Copper
- Insulation(X8C): PP6331 ID 0.95-1.0
- Jacke: PVC No UL 80 P
- Package: Individual PE Bag

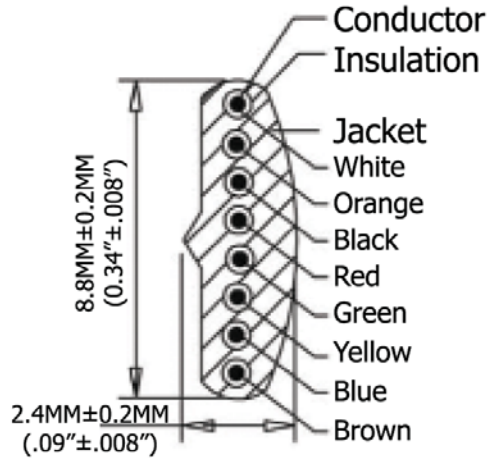

SBC: A-A

Extended Length ("L2")	Typical Retracted Length ("L1")
84.0 Inches - 96.6 Inches	39.5 Inches
2,133.6MM-2,453.64MM	1,003.3MM

Electrical:

- Voltage rating: 30V (DC)



Scale	1:1						Name	Item No. AT-C-26-8/8/W-7-OE	
TOLERANCE					Drawn	11.02.11	Chappell		
X.X	±0.40				Approved			Title NON-UL 26AWG (0.12X12)*8C, O.D.: 2.4*8.8MM, Single Plug, 50µ" of contact plating, WHITE	
X.XX	±0.25								
X.XXX	±0.15								
Angle	±3°							Drawing No.	
								Replace	Sheet
					Modification	Date	Name		