



THESE DRAWINGS ARE THE PROPERTY OF QUALTEK ELECTRONICS AND NOT TO BE REPRODUCED FOR OR COMMUNICATED TO A THIRD PARTY WITHOUT THE EXPRESS WRITTEN PERMISSION OF AN OFFICER OF QUALTEK ELECTRONICS.

REVISION			
REV.	DESCRIPTION	DATE	APPROVED
A	Changed HDMI/M Mold Design / Changed Cable Spec /	03-12-07	DP
B	Updated Specifications	09-08-11	LY
C	Updated Graphics, Notes, and Pin out	02-07-14	LY

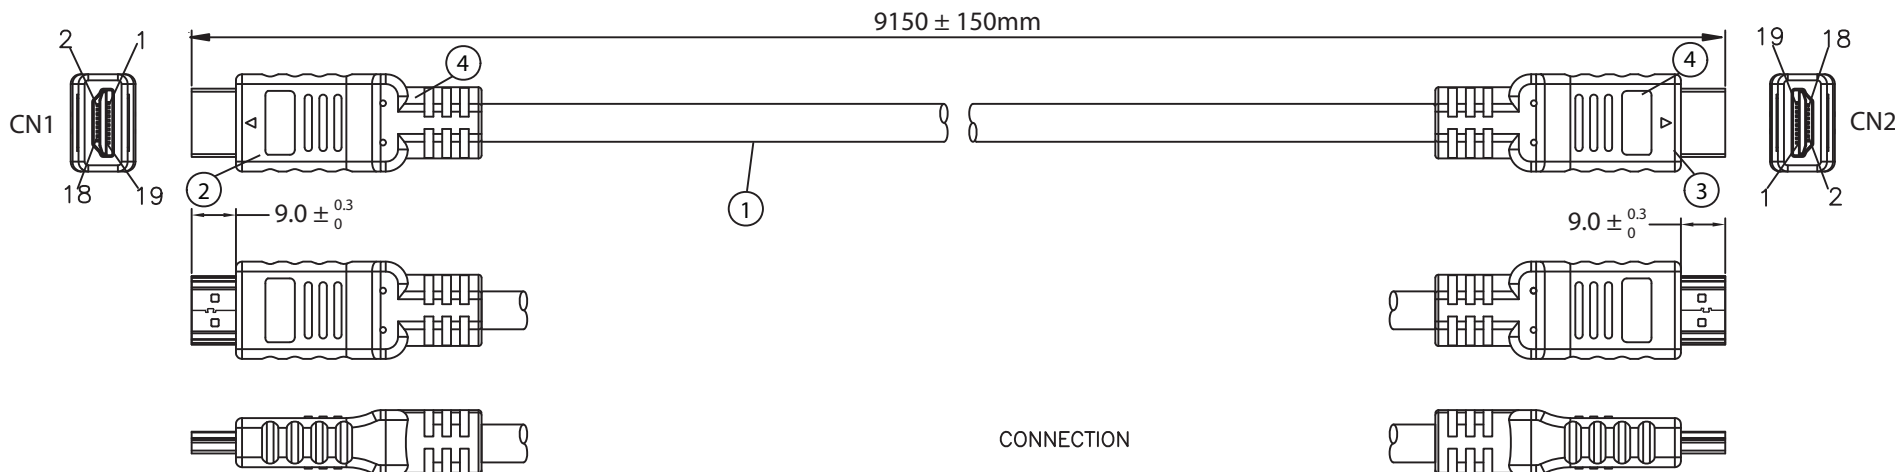

CONNECTION

CN1		CN2		CN1		CN2	
1	WHITE	1	VIOLET	13	VIOLET	13	VIOLET
3	BROWN	3	WHITE	14	WHITE	14	WHITE
2	DRAIN	2	15	15	YELLOW	15	YELLOW
4	WHITE	4	16	16	ORANGE	16	ORANGE
6	RED	6	17	17	GRAY	17	GRAY
5	DRAIN	5	18	18	BLACK	18	BLACK
7	WHITE	7	19	19	RED	19	RED
9	GREEN	9	SHELL	SHELL	DRAIN & BRAID	SHELL	SHELL
8	DRAIN	8					
10	WHITE	10					
12	BLUE	12					
11	DRAIN	11					

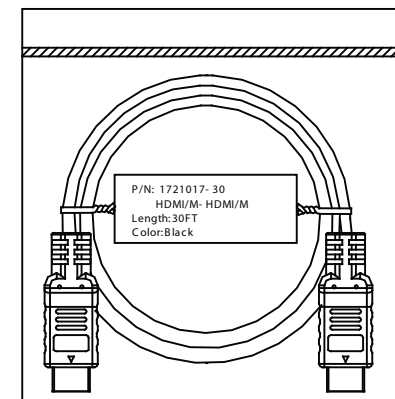

NOTES:

- CABLE: UL20276  
(24AWG\*1PR+EAM)\*4+24AWG\*1PR+24AWG\*5C+AEB (AL) 65%  
OUTER JACKET: BLACK, OD: 9.5 ± 0.2mm
- CONNECTOR: HDMI A 19P MALE  
INSULATOR: BLACK PBT  
PIN G/F  
NICKEL PLATED SHELL
- CONNECTOR: HDMI A 19P MALE  
INSULATOR: BLACK PBT  
PIN G/F  
NICKEL PLATED SHELL
- PVC MOLDED: 45P BLACK
- ELECTRICAL TEST:  
<1>.100% OPEN SHORT & MISS WIRE TEST  
<2>.INSULATION RESISTANCE: AC 300V DC300V 10M ohm MIN.  
<3>.CONDUCTOR RESISTANCE: 5 ohm MAX.
- 1PC/POLYBAG

**CONTROLLED**

Dim range (mm)	Tolerance +/- (mm)	Qualtek Electronics Corp. WCI DIVISION		
		Part Number:	1721017-30	RoHS Compliant
0-1	0.15	Description: HDMI/M - HDMI/M		
1-6	0.20			
6-18	0.30		UNIT: mm	REV. C
18-50	0.50		Checked / Date	Approved / Date
50-120	0.70	Drawn / Date		
120-250	0.90	B. Grubb 01-25-07	01-25-07	JJH / 01-25-07
250-500	1.20			