



May.1.2017 Copyright 2017 HIROSE ELECTRIC CO., LTD. All Rights Reserved.

COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE

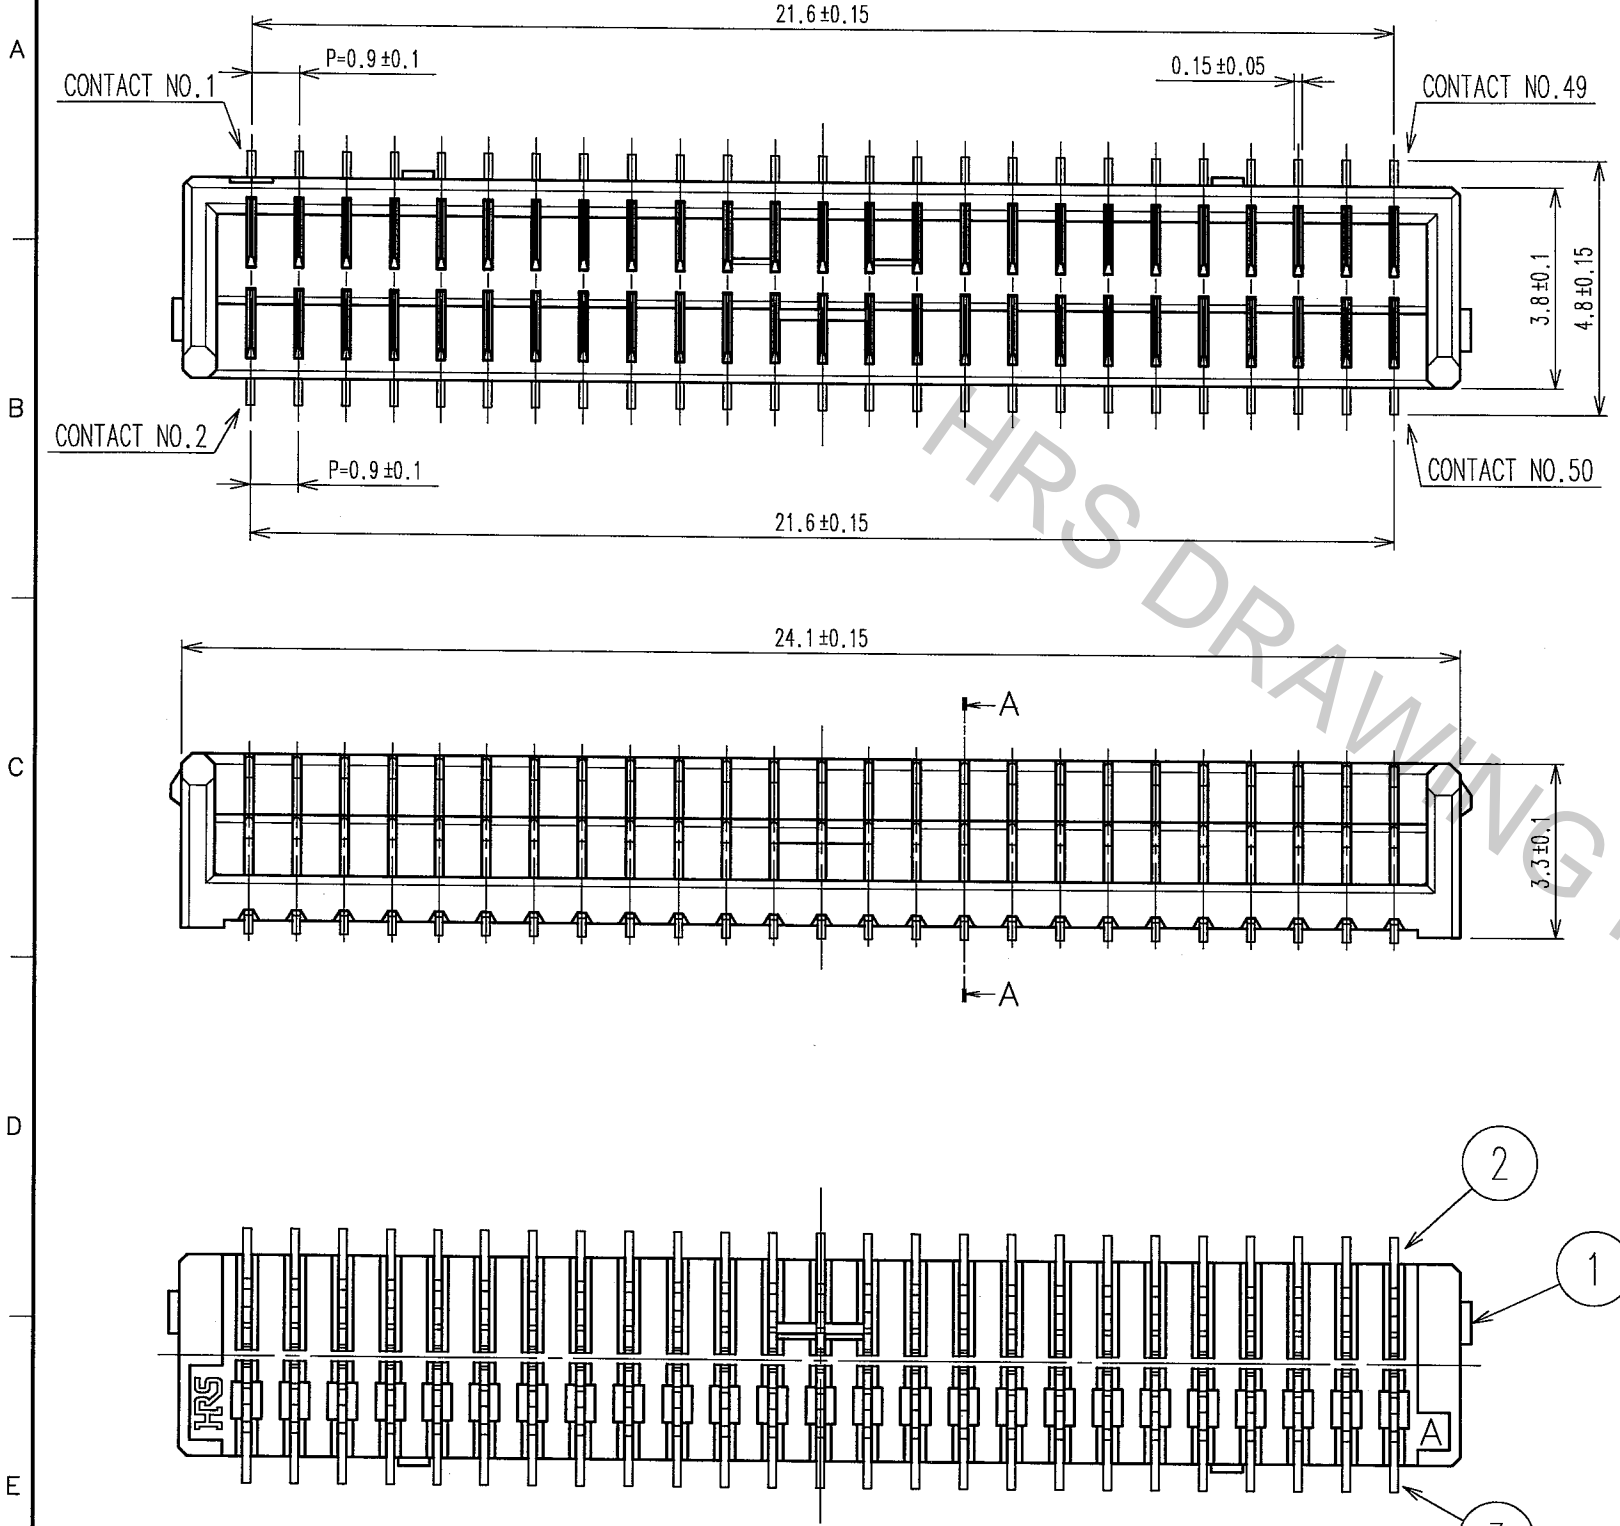

RECOMMENDED PATTERN(5:1)

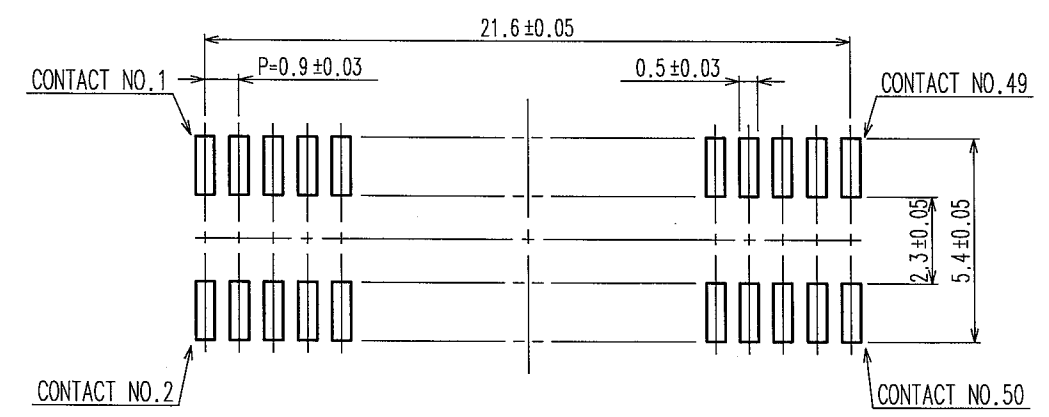

NOTE 1 : LEAD CO-PLANARITY SHALL BE 0.1mm MAX.  
 2 : ( ) SIZE BE A REFERENCE SIZE.  
 3 : CONTACT PLATING SPECIFICATION  
 CONTACT AREA : GOLD PLATED 0.1μm min.  
 LEAD AREA : GOLD FLASH PLATED.  
 UNDER PLATING : NICKEL PLATED 1.5μm min.  
 4 : PACKING SPECIFICATION IS SHOWN IN 2 PAGES.

3	PHOSPHOR BRONZE	3	6	POLYAMIDE	UL94V-0, BLACK
2			5	POLYESTER	COVER TAPE
1	POLYAMIDE	UL94V-0, BLACK	4	PS	EMBOSSED CARRIER TAPE
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS

CODE NO. (OLD)	DRAWN	DESIGNED	CHECKED	APPROVED	RELEASED
	F.Matsuki '05.08.31	T.Kumazawa '05.08.31	H.Uehara '05.09.01	J.Oma '05.09.01	

SCALE	FR:EE	DRAWING NO.	EDC3-301587-01	PART NO.	DF24A-50DP-0.9V(51)
UNITS	mm	HIROSE ELECTRIC CO., LTD		CODE NO.	CL687-3209-2-51

TO

