

6

5

4

3

2




1

P/N	LENGTH
79516-1041	1000 +/-50MM
79516-1043	3000 +/-100MM
79516-1045	5000 +/-150MM

EXT. "A"

EXT. "B"

10.72 REF.

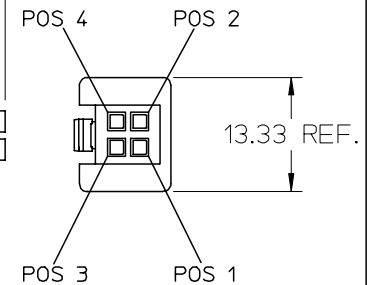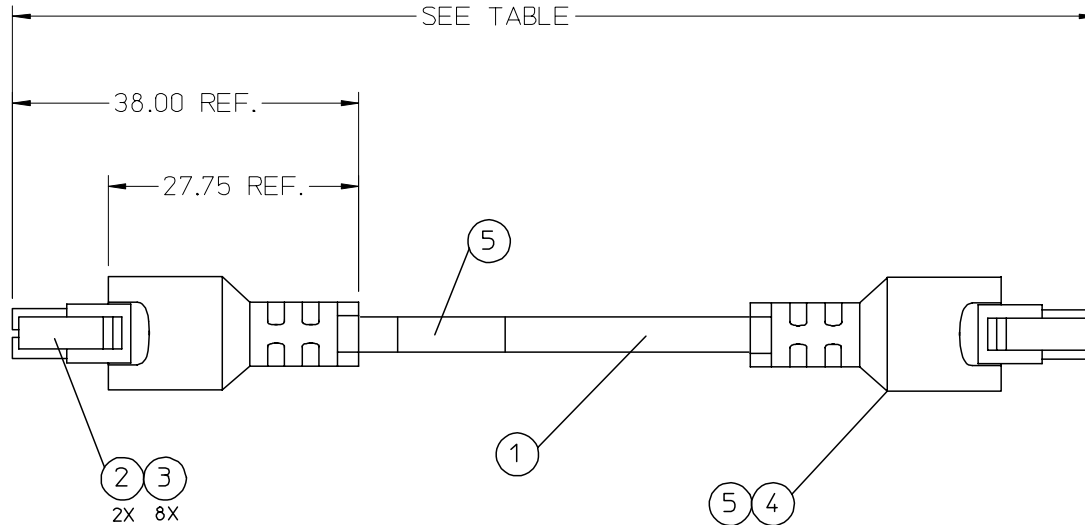

WIRING CHART

EXT. "A" POS.	COLOR	EXT. "B" POS.
1	BLACK	1
2	WHITE	2
3	RED	3
4	GREEN	4

ROHS

NOTES:

- PIN CONNECTION ACCORDING TO TABLE.
- LABEL CABLE WITH FOLLOWING INFORMATION:
P/N (SEE TABLE)
REV. (SEE REVISION TABLE)
M/D WW/YY
ASSEMBLED IN MEXICO

ITEM	P/N	DESCRIPTION	QTY
6	0799426019	PLASTIC LABEL EPC#R-TW10F	1 PC
5	0799300108	TAPON	2 PC
4	0899920428	PVC 15% MF BLACK UL94V-2	A/R
3	0430300004	MicroFit 3.0 F Crp Term Chn Tin 26-30	8 PC
2	0430250400	MicroFit 3.0 DR Rcpt PnlMnt 2Ckt	2 PC
1	0799232211	CABLE 4 COND, 26AWG, JACKETED	A/R

RELEASED EC NO: MEX2006-0208 DRWN:MMARTINEZ 2006/06/27 CHKD:ACUEVAS 2006/07/07 APPR:ACUEVAS 2006/07/07	DESCRIPTION REV	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED) <table border="1"> <thead> <tr> <th></th> <th>mm</th> <th>INCH</th> </tr> </thead> <tbody> <tr> <td>4 PLACES</td> <td>± ---</td> <td>± ---</td> </tr> <tr> <td>3 PLACES</td> <td>± ---</td> <td>± ---</td> </tr> <tr> <td>2 PLACES</td> <td>± ---</td> <td>± ---</td> </tr> <tr> <td>1 PLACE</td> <td>± ---</td> <td>± ---</td> </tr> </tbody> </table> ANGULAR ± --- °		mm	INCH	4 PLACES	± ---	± ---	3 PLACES	± ---	± ---	2 PLACES	± ---	± ---	1 PLACE	± ---	± ---	DIMENSION STYLE MM ONLY	SCALE ---	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION
				mm	INCH																	
		4 PLACES		± ---	± ---																	
		3 PLACES		± ---	± ---																	
2 PLACES	± ---	± ---																				
1 PLACE	± ---	± ---																				
▽=0	▽=0	DRAWN BY AOROZCO	DATE 10/10/2003	TITLE MICRO-FIT OVERMOLDED ASSEMBLY 4 CKT 1, 3 & 5 MTS.																		
□=0		CHECKED BY AOROZCO	DATE 10/10/2003	MOLEX INCORPORATED																		
		APPROVED BY ACUEVAS	DATE 10/10/2003	MATERIAL NO. VARIOS	DOCUMENT NO. SD-79516-002	SHEET NO. 1 OF 1																

5

4

3

2

1