


Chip Monolithic Ceramic Capacitor

Electrical Characteristics Data

0603 X7R 2.2nF 25V(0603B222K250CT)

1. Dimension



Size Inch (mm)	L (mm)	W (mm)	T (mm)
0603 (1608)	1.60±0.10	0.80±0.10	0.80±0.07


2. Cap, DF, IR @25°C

(Cap, DF @ 1KHz, 1Vrms ; IR @ 25V, 120sec)

Item	Spec
Cap [nF]	2.2(±10%)
DF	≤ 3.5%
IR [G-ohm]	>10


3. Impedance/ESR-Frequency

(Equipment: 4287A)

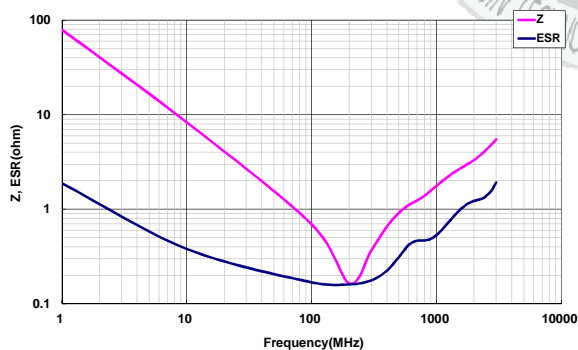

4. Capacitance – Temperature Characteristics


(Equipment: 4284A)

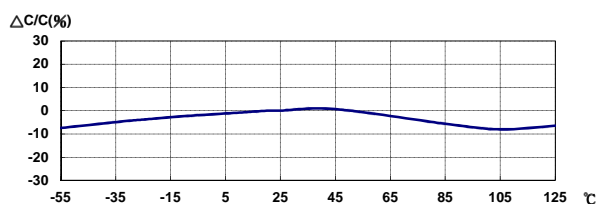

5. Capacitance – DC Voltage Characteristics


(Equipment: 4284A; DC charge 60±5sec)

12.5V : -2.32% ; 25V : -3.75%

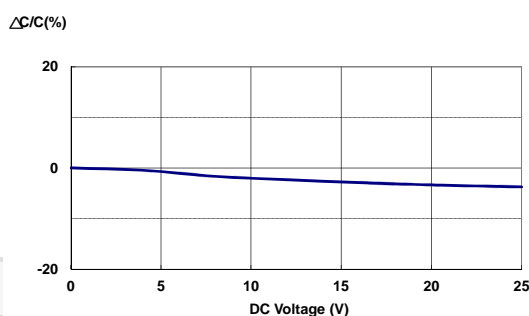

6. Capacitance – AC Voltage Characteristics

(Equipment: 4284A)

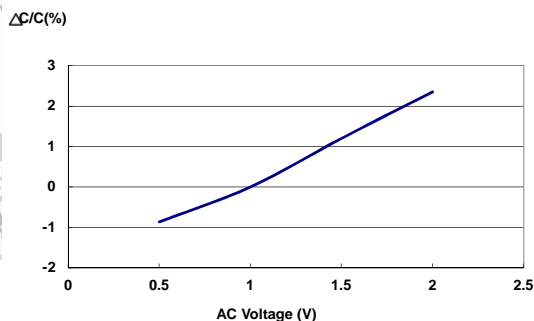

Last updated : 2018/06/13