Apr.1.2017 Copyright 2017 HIROSE ELECTRIC CO., LTD. All Rights Reserved.

	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE		COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
1	2	DIS-E-000192	T.Ito	Y.E	05.08.05						

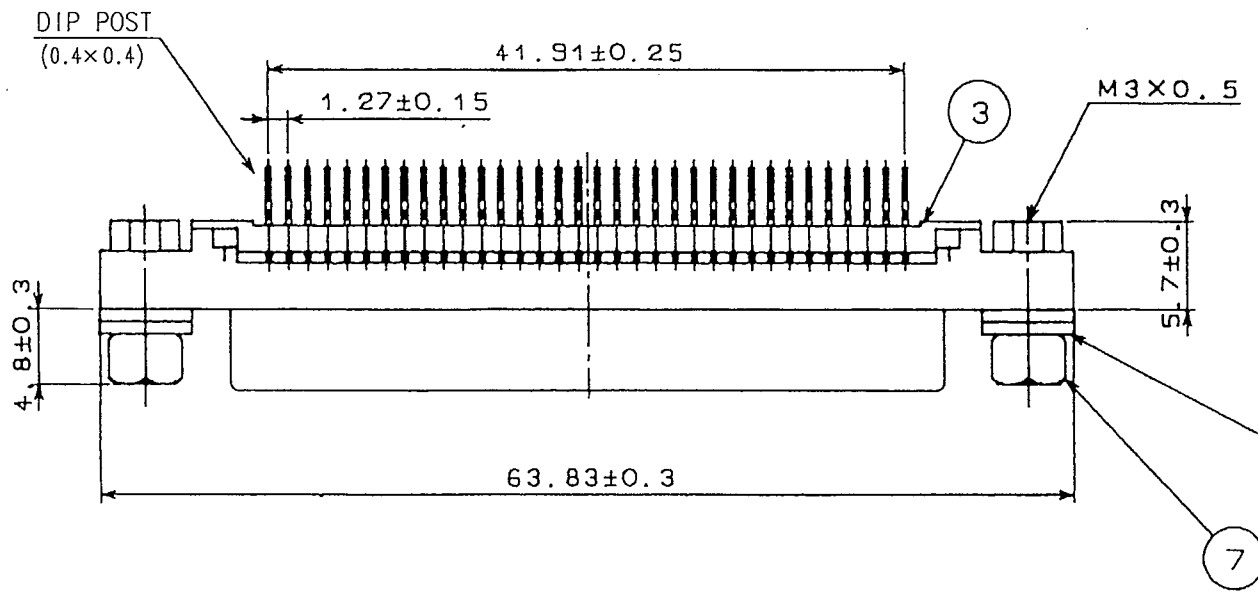

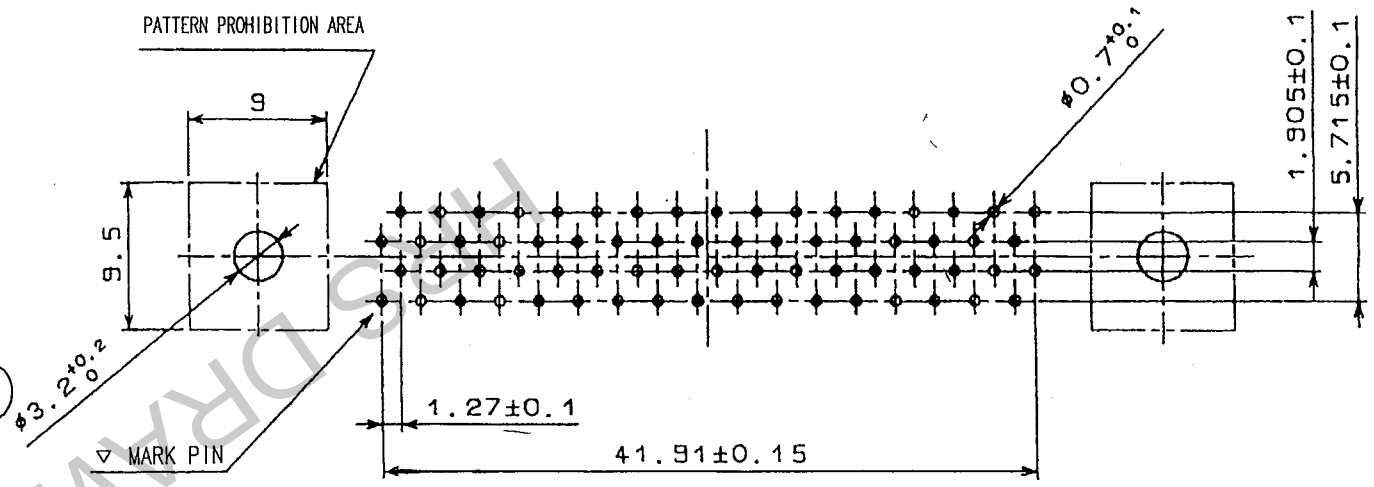

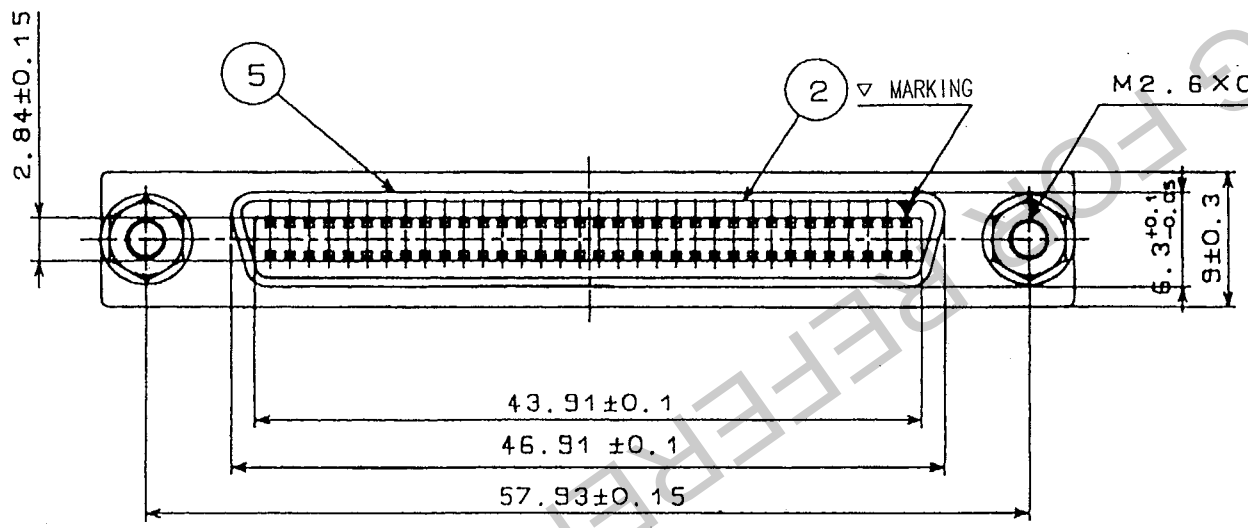

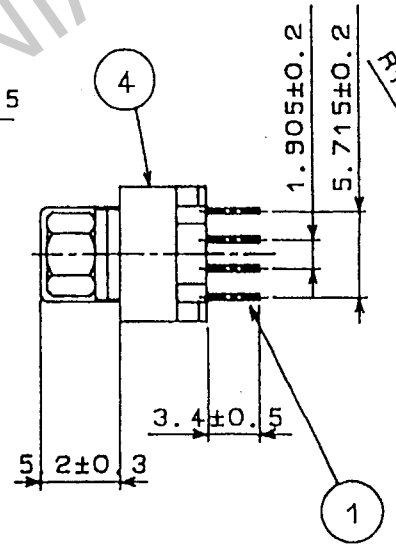

RECOMMENDED PC BOARD PATTERN

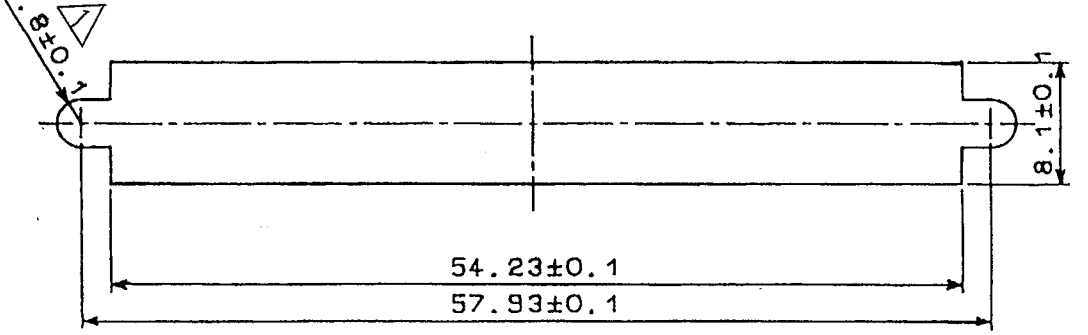

RECOMMENDED PANEL CUTOUT
(PANEL THICKNESS : 2mm MAX)

Note Please adjust the number of washers in accordance with the panel thickness.

Panel thickness(t)	Washer(pcs)
0 ~0.4	2
0.8~1.2	1
1.6~2.0	0

⚠

NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS
4	ZINC ALLOY DIE CASTING	NICKEL PLATING			
3	PBT	UL94V-0(BLACK)	7	BRASS	NICKEL PLATING
2	PBT	UL94V-0(BLACK)	6	STEEL	NICKEL PLATING
1	PHOSPHOR BRONZE	SELECTIVE GOLD PLATING 0.3μm	5	STEEL	NICKEL PLATING

CODE NO.(OLD)	DRAWN	DESIGNED	CHECKED	APPROVED	RELEASED
CL	T.Kameya 03·10·21	T.Kameya 03·10·21	Y.Enami 03·10·22	H.Mino 03·10·22	. .

SCALE	DRAWING NO.	PART NO.
2 : 1	EDC3-041445-01	DX20BM-68S(50)
UNITS: mm	HRS HIROSE ELECTRIC CO., LTD	CODE NO. CL230-5020-3-50 1/1

TO
Q

THIS DRAWING IS FOR REFERENCE