

Feed-through header - MSTBO 2,5/ 4-G1PL GY7035 - 2200325


Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



PCB headers, nominal current: 16 A, rated voltage (III/2): 320 V, number of positions: 4, pitch: 5 mm, color: light gray, contact surface: Tin, mounting: Soldering

Why buy this product

- Headers and plugs for ME and ME MAX electronics housing
- Plug-in direction orthogonal to the PCB
- 5 mm pitch
- 2 to 4-pos.
- Touch proof

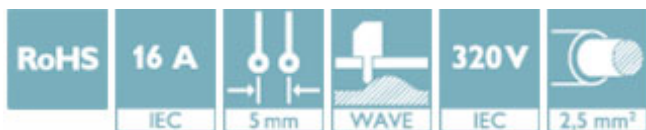

Key Commercial Data

| | |
|--------------|---------------|
| Packing unit | 50 STK |
| GTIN | |
| GTIN | 4046356566315 |

Technical data

Dimensions

| | |
|-------------|---------|
| Pitch | 5 mm |
| Dimension a | 15 mm |
| Pin spacing | 5.00 mm |

General

| | |
|-----------------------------|-------------------|
| Range of articles | MSTBO 2,5/..-G1PL |
| Insulating material group | I |
| Rated surge voltage (III/3) | 4 kV |
| Rated surge voltage (III/2) | 4 kV |
| Rated surge voltage (II/2) | 4 kV |
| Rated voltage (III/3) | 250 V |
| Rated voltage (III/2) | 320 V |

Feed-through header - MSTBO 2,5/ 4-G1PL GY7035 - 2200325

Technical data

General

| | |
|--|------------|
| Rated voltage (II/2) | 400 V |
| Connection in acc. with standard | EN-VDE |
| Nominal current I _N | 16 A |
| Maximum load current | 16 A |
| Insulating material | PA |
| Flammability rating according to UL 94 | V0 |
| Color | light gray |
| Number of positions | 4 |

Standards and Regulations

| | |
|--|--------|
| Connection in acc. with standard | EN-VDE |
| | CUL |
| Flammability rating according to UL 94 | V0 |

Environmental Product Compliance

| | |
|------------|---|
| China RoHS | Environmentally friendly use period: unlimited = EFUP-e |
| | No hazardous substances above threshold values |

Approvals


Approvals


Approvals

EAC / IECCEB Scheme / VDE report with production monitoring / cULus Recognized

Ex Approvals


Approval details


| | | |
|-----|---|---------|
| EAC |  | B.01742 |
|-----|---|---------|

| | | | |
|--------------------------------|---|---|-----------|
| IECEE CB Scheme |  | http://www.iecee.org/ | DE1-57578 |
| Nominal voltage U _N | 320 V | | |
| Nominal current I _N | 16 A | | |

Feed-through header - MSTBO 2,5/ 4-G1PL GY7035 - 2200325

Approvals

| | | | |
|---------------------------------------|---|---|----------|
| VDE report with production monitoring |  | http://www2.vde.com/de/Institut/Online-Service/VDE-gepruefteProdukte/Seiten/Online-Suche.aspx | 40044868 |
| Nominal voltage UN | | 320 V | |
| Nominal current IN | | 16 A | |

| | | | |
|--------------------|---|---|--|
| cULus Recognized |  | http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm E60425-19931012 | |
| | D | B | |
| Nominal voltage UN | 300 V | 300 V | |
| Nominal current IN | 10 A | 15 A | |

Phoenix Contact 2018 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>