

## SUMMARY

### # Wires

Low	0
High	0
Coax	0
Triax	0
Quad	0
Fiber	0
Fluidic	1



*Image is for illustrative purpose only*

### Download

[Request a quote](#)

[Catalog](#)

Series	C
Termination type	
IP rating	50
Cable Ø	0.00 - 0.00 mm
Matching parts	
Status	
Alternative part	

## TECHNICAL DETAILS

### Mechanics

Shell Style/Model	CA*: Straight plug with cable collet
Keying	
Housing Material	PSU (Polysulfone), black
Cable Fixing	∅ 0 - 0 mm
Variant	

### Performance

Configuration	CAB.015 : 1 Fluidic, 10 Low V.
Insulator	
Rated Current	5 Amps

### Specifications

Test voltage (kV rms) Contact-contact:	1.15
Air clearance min. (mm) or Creepage distance min. (mm):	0.9


### Others

IP Rating:	50
------------	----

---

# DRAWINGS

## Draws

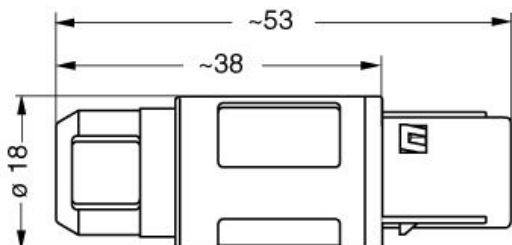

## Dimensions

	A	L
mm.	18	53
in.	0,71	2,09

---

# RECOMMENDED BY LEMO

## Tools

Crimp Tool: DPC.91.701.V  
Crimp settings: AWG/Selector = 22-24-26/6-5-5  
Positionner: DCE.91.072.BVC  
Extractor: DCF.91.070.2LT  
Replacement contact: FGG.2B.555.ZZC

## Cables