

Housing - HC-D 50-TFQ-76/O1STM25S - 1645202

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



HEAVYCON sleeve housing D50, for double locking latch, height 76 mm, without support 1x M25, lateral conductor exit



Key Commercial Data

Packing unit	1 pc
GTIN	 4 017918 913120
Weight per Piece (excluding packing)	266.0 g
Custom tariff number	85389099
Country of origin	Germany

Technical data

Dimensions

Height	76 mm
Width	56 mm
Length	82 mm

Ambient conditions

Degree of protection of housing (IP)	IP65
Ambient temperature (operation)	-40 °C ... 125 °C

General

Note	For contact inserts HC-D25, A16/A32
Size	D50
Housing type	Sleeve housing
Locking type	For double locking latch
No. of cable outlets	1

Housing - HC-D 50-TFQ-76/O1STM25S - 1645202

Technical data

General

Cable exit	Lateral
Screw connection	none
Type of the screw connection	1x M25
Housing material	Aluminum die-cast
Housing surface material	Powder-coated, gray

Classifications

eCl@ss

eCl@ss 4.0	27140816
eCl@ss 4.1	27140816
eCl@ss 5.0	27143424
eCl@ss 5.1	27143424
eCl@ss 6.0	27143424
eCl@ss 7.0	27440209
eCl@ss 8.0	27440202
eCl@ss 9.0	27440202

ETIM

ETIM 2.0	EC000437
ETIM 3.0	EC000437
ETIM 4.0	EC000437
ETIM 5.0	EC000437

UNSPSC

UNSPSC 6.01	31261502
UNSPSC 7.0901	31261502
UNSPSC 11	31261502
UNSPSC 12.01	31261502
UNSPSC 13.2	31261502

Approvals

Approvals

Approvals

EAC / GL

Housing - HC-D 50-TFQ-76/O1STM25S - 1645202

Approvals

Ex Approvals

Approvals submitted


Approval details

EAC

GL

Drawings

Dimensional drawing

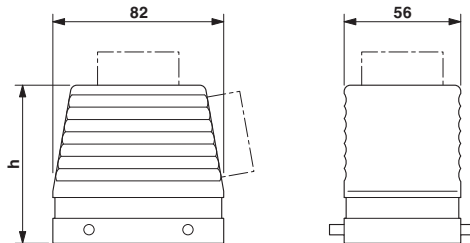

Dimensional drawing