


# Printed-circuit board connector - MC 1,5/12-G-3,5 P26 THRR72 - 1788712

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Header, Nominal current: 8 A, Rated voltage (III/2): 160 V, Number of positions: 12, Pitch: 3.5 mm, Color: black, Contact surface: Tin, Mounting: THR soldering

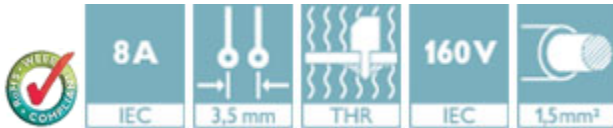

## Key Commercial Data

Packing unit	1 pc
Minimum order quantity	380 pc
Custom tariff number	85366990
Country of origin	Germany

## Technical data

Product type	PCB headers
Approval	VDE report with production monitoring
	EAC
	cULus Recognized
	IECEE CB Scheme
	EAC
Rated voltage (IEC)	160
Rated current (IEC)	8
Mounting type	THR soldering
Number of positions	12
Pitch	3.5 mm
Levels	single-level
Type of locking	without
Plug-in system	MINI COMBICON
Product family	MC 1,5/...-G-THR

# Printed-circuit board connector - MC 1,5/12-G-3,5 P26 THRR72 - 1788712

## Technical data

Contact type	Male connector
--------------	----------------

## Classifications

### eCl@ss

eCl@ss 4.0	272607xx
eCl@ss 4.1	27260701
eCl@ss 5.0	27260701
eCl@ss 5.1	27260701
eCl@ss 6.0	27260704
eCl@ss 7.0	27440402
eCl@ss 8.0	27440402
eCl@ss 9.0	27440402

### ETIM

ETIM 4.0	EC002637
ETIM 5.0	EC002637

### UNSPSC

UNSPSC 6.01	30211810
UNSPSC 7.0901	39121409
UNSPSC 11	39121409
UNSPSC 12.01	39121409
UNSPSC 13.2	39121409

## Approvals

### Approvals

---

#### Approvals

VDE Gutachten mit Fertigungsüberwachung / EAC / cULus Recognized / IECEE CB Scheme / EAC

---

#### Ex Approvals

---

#### Approvals submitted

---

# Printed-circuit board connector - MC 1,5/12-G-3,5 P26 THRR72 - 1788712

## Approvals

### Approval details

VDE Gutachten mit Fertigungsüberwachung	
Nominal current $I_N$	8 A
Nominal voltage $U_N$	160 V

EAC
-----


cULus Recognized		
	B	D
Nominal current $I_N$	8 A	8 A
Nominal voltage $U_N$	300 V	300 V

IECEE CB Scheme	
Nominal current $I_N$	8 A
Nominal voltage $U_N$	160 V

EAC
-----

## Drawings

Drilling diagram

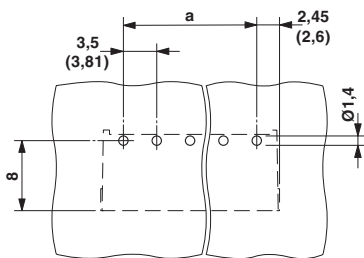

Dimensional drawing

