
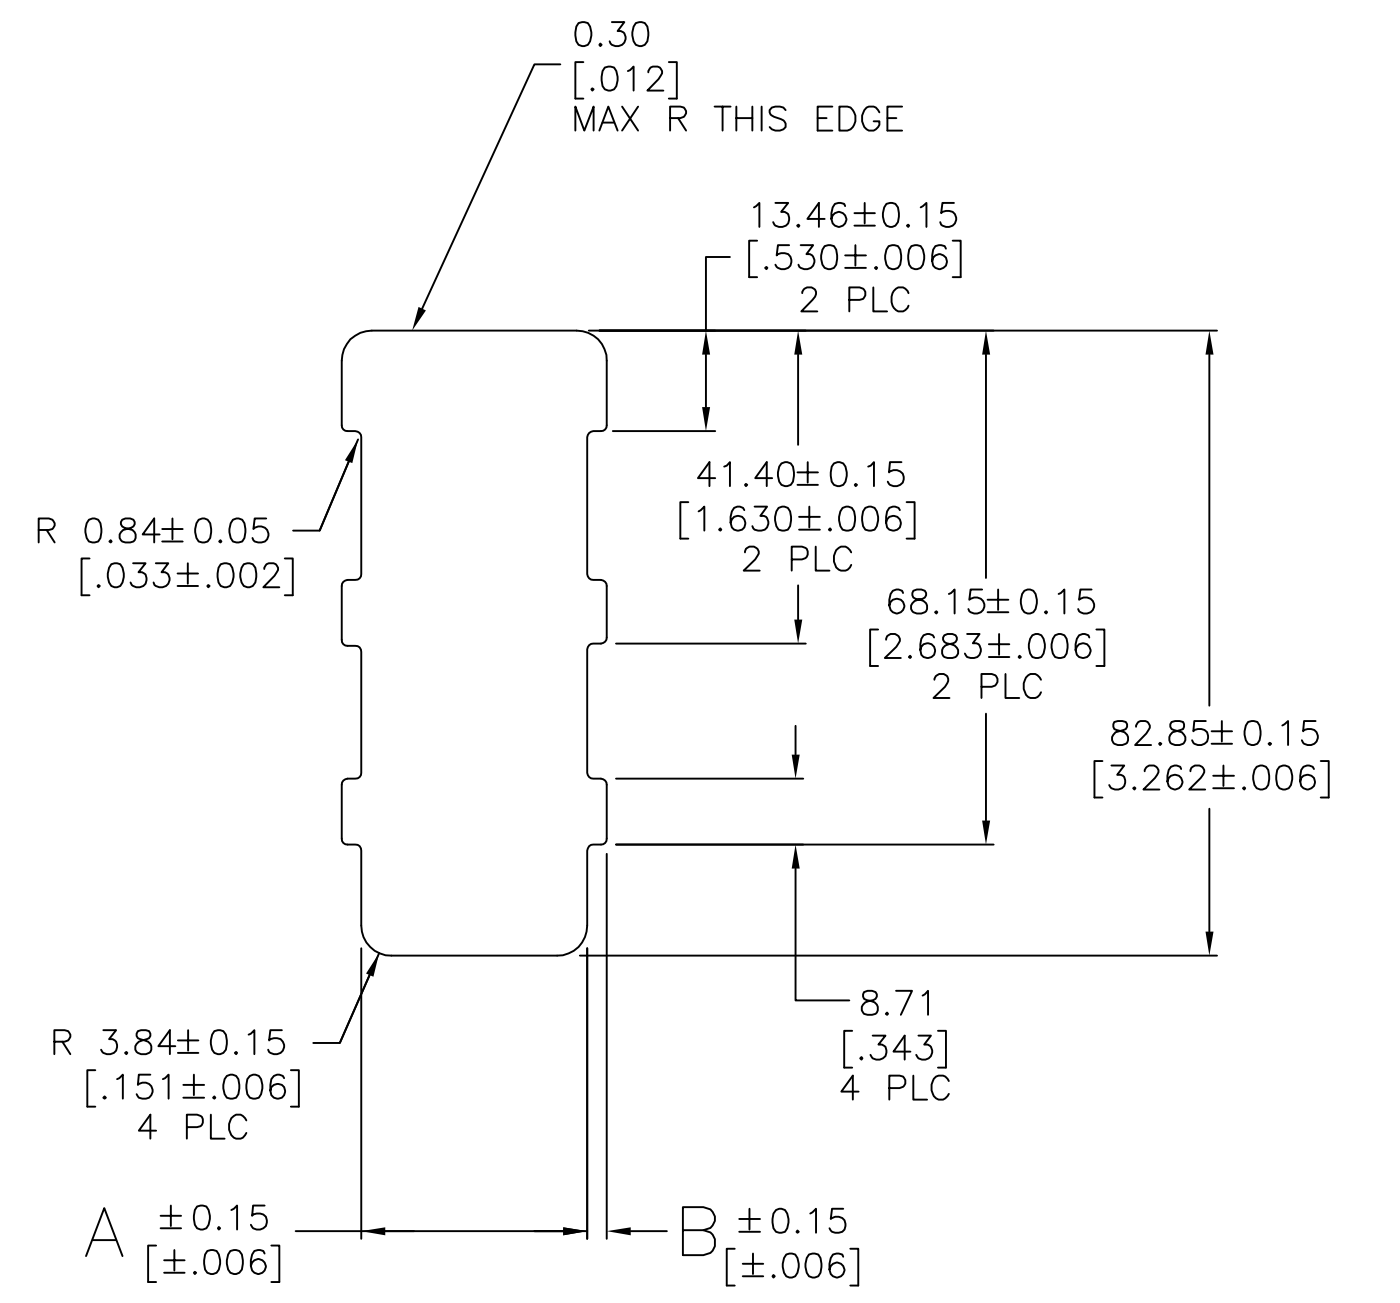
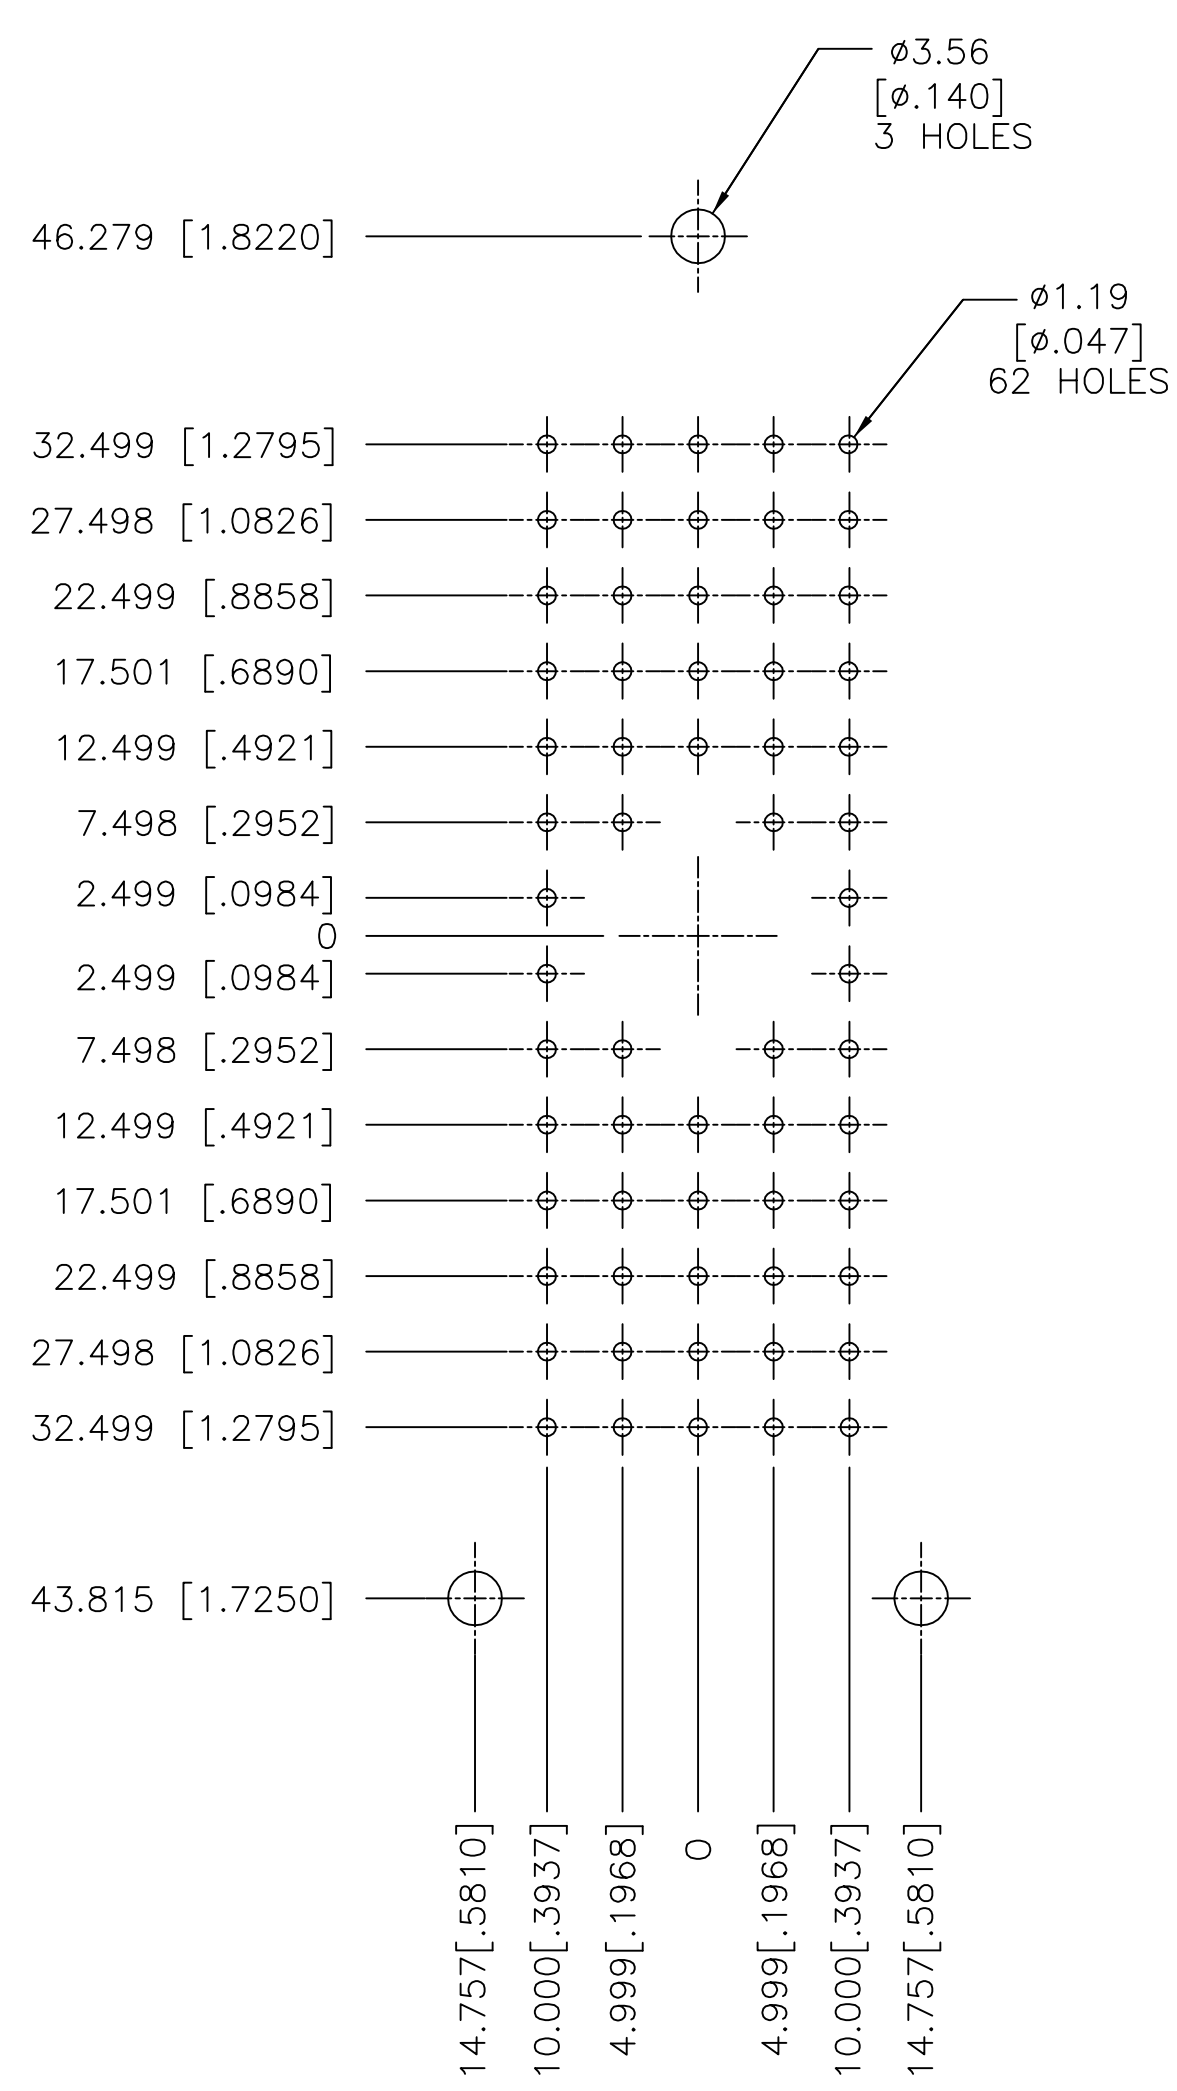
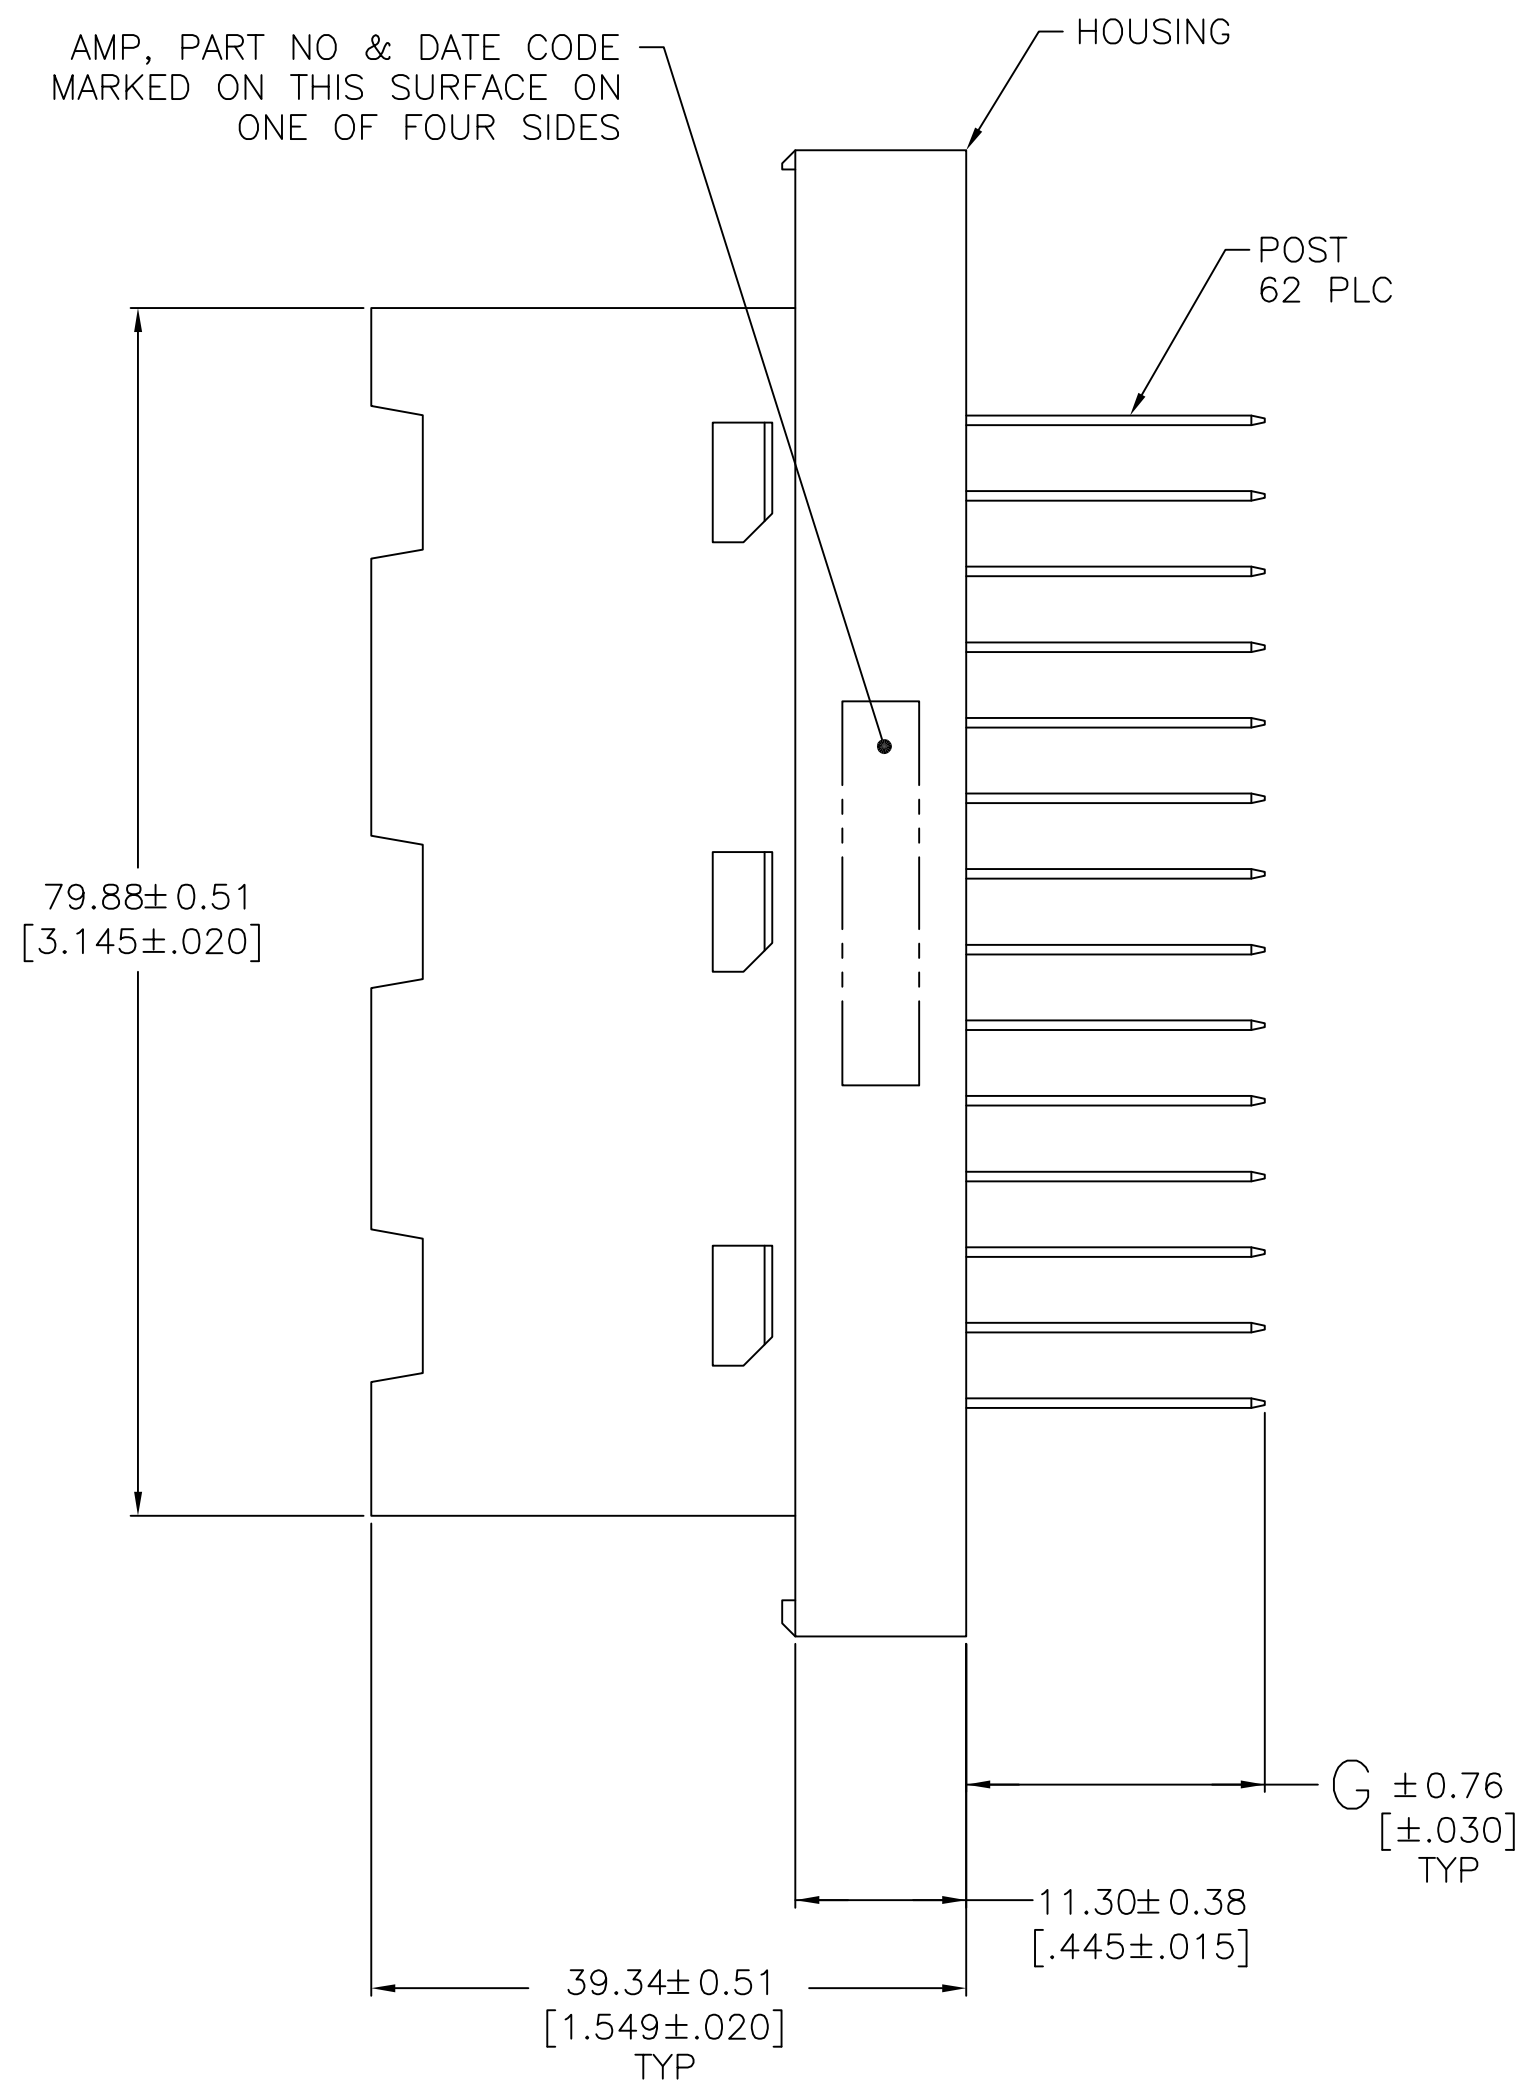


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
N4		REVISED PER ECO-12-009700	23MAY12	KH	DR
P		REVISED PER ECO-17-009310	28JUN2017	RS	MZ
R		REVISED PER ECO-17-011181	05AUG2017	RS	MZ

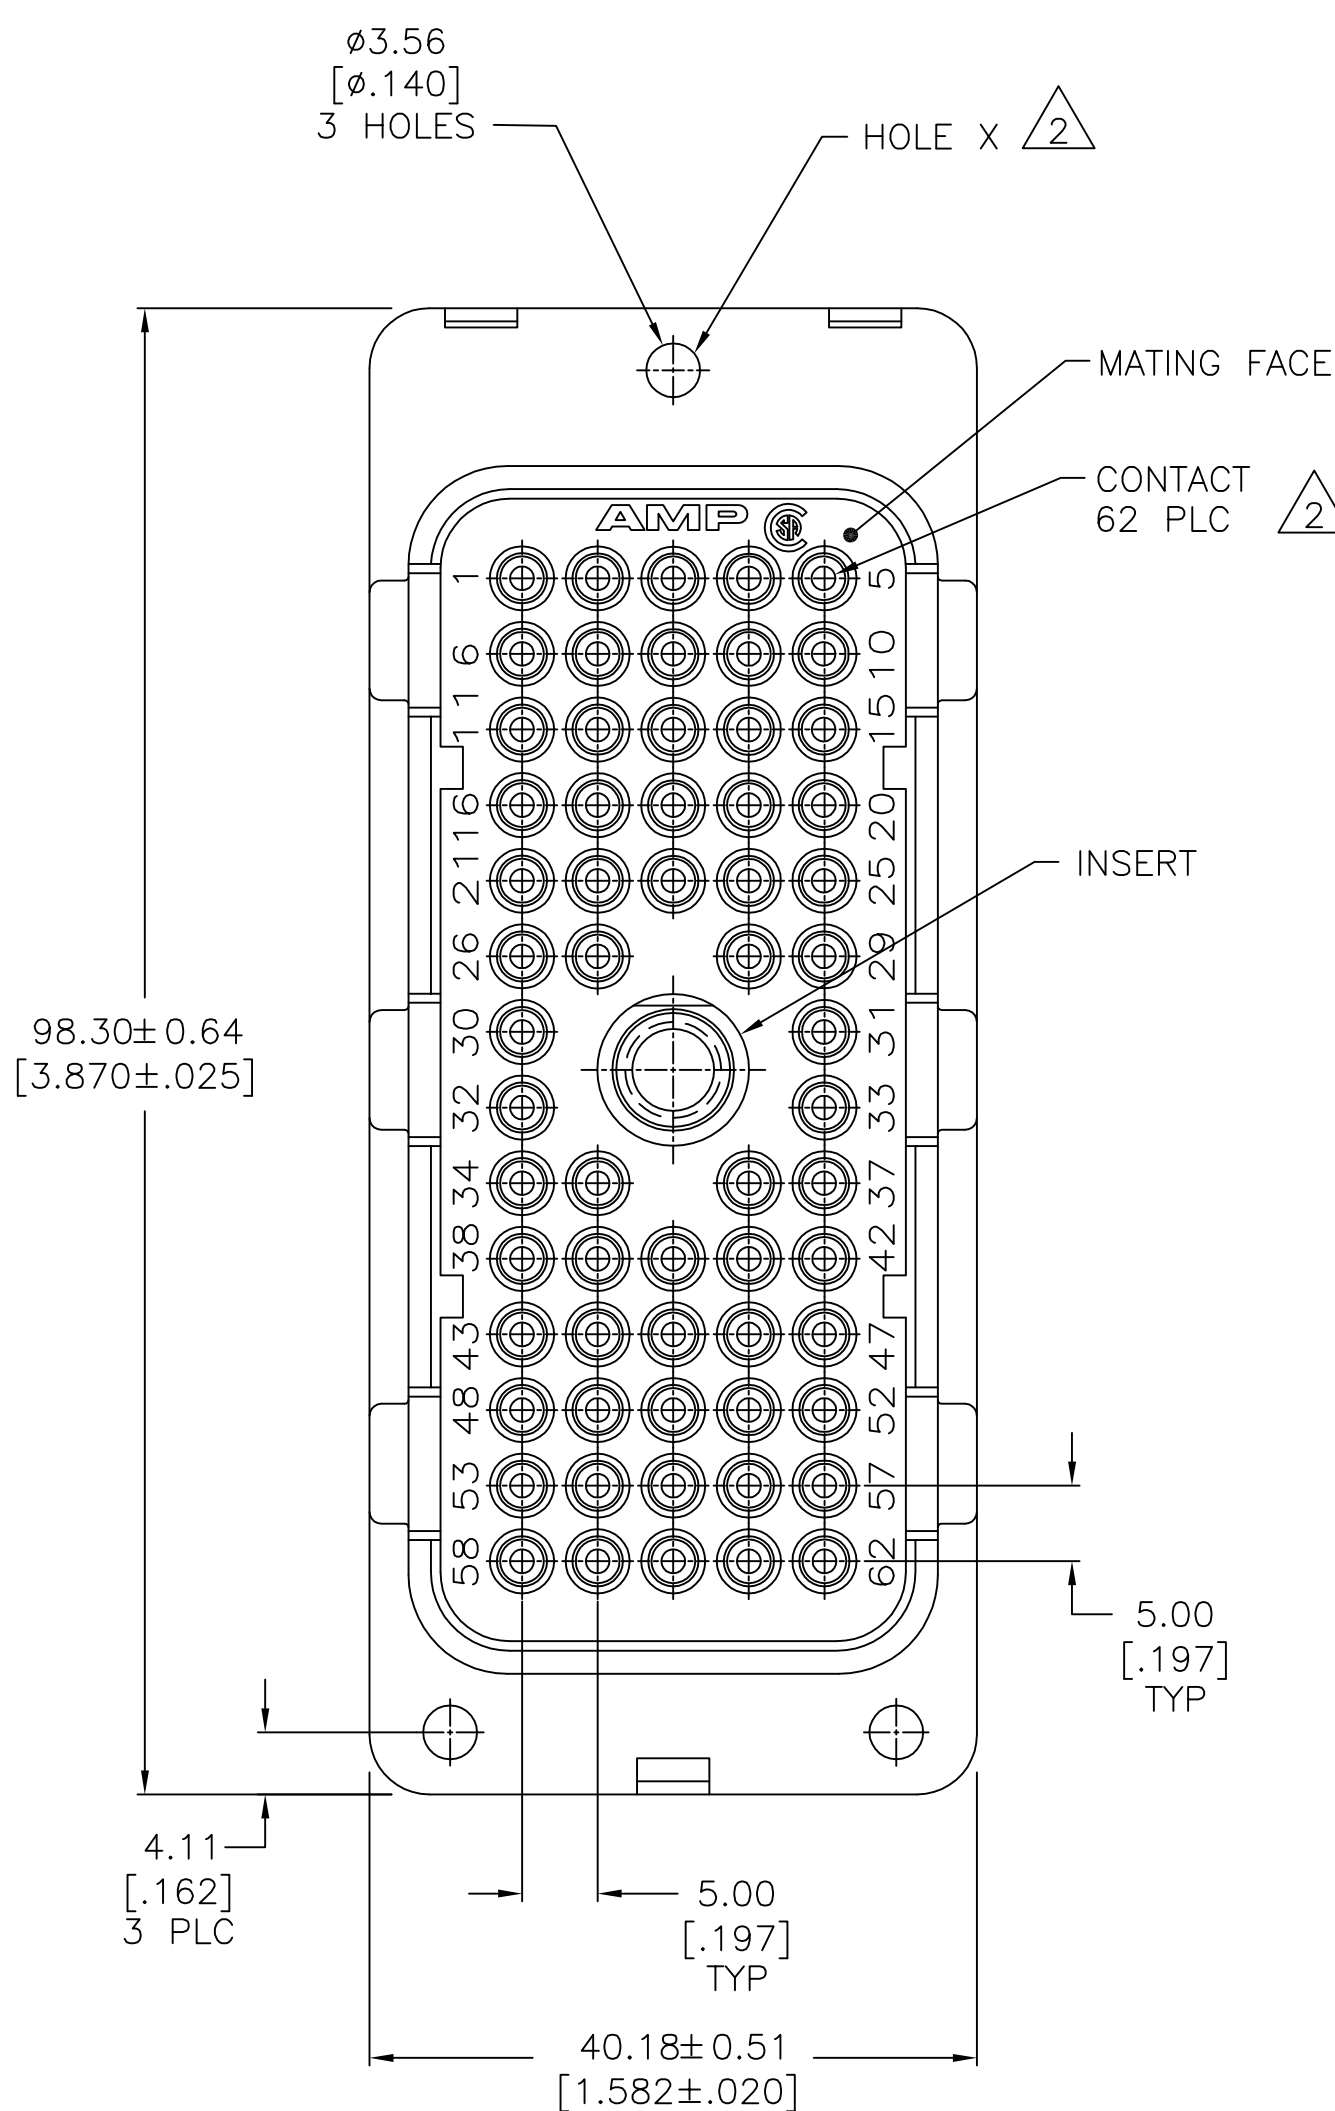

RECOMMENDED PANEL CUTOUT SCALE 1:1

RECOMMENDED PC BOARD LAYOUT

1.75 [.069]	32.36 [1.274]	1.40-1.98 [.055-.078]
2.74 [.108]	30.05 [1.183]	0.79-1.40 [.031-.055]
B	A	PANEL THICKNESS

- 1 PANEL CUTOUT FOR REAR MOUNTED PIN BLOCK.
- 2 SEAMS OF ALL PINS TO BE ORIENTED TOWARD HOLE X SIDE.
- 3 POLYESTER, BLACK.
- 4 0.76µm [.000030] MIN GOLD PER MIL-G-45204 FOR A LENGTH OF 6.35 [.250] MIN FROM MATING END, GOLD FLASH ON REMAINDER, BOTH OVER 1.27µm [.000050] MIN NICKEL PER QQ-N-290.
- 5 2.54µm [.000100] MIN TIN-LEAD PER MIL-T-10727 OVER 2.54µm [.000100] MIN COPPER PER MIL-C-14550.
- 6 2.54µm [.000100] MIN TIN PER MIL-T-10727 OVER 2.54µm [.000100] MIN COPPER PER MIL-C-14550.
- 7 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

OBSOLETE	5	4	5.59 [.220]	211580-6
	6	4	3.56 [.140]	211580-5
	6	4	19.76 [.778]	211580-4
	5	4	3.56 [.140]	211580-3
	5	4	19.76 [.778]	211580-2
	POST FINISH	CONTACT FINISH	G	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT. DIN L SIZE 09/09/92. CHK R.STONE 10-15-92. APVD -

DIMENSIONS: mm [INCHES]. TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± -, 1 PLC ± -, 2 PLC ± 0.13 [.005], 3 PLC ± 0.013 [.0005], 4 PLC ± -, ANGLES ± -.

MATERIAL FINISH. WEIGHT -. SIZE A1. CAGE CODE DRAWING NO. 00779. DRAWING NO. 211580. RESTRICTED TO CUSTOMER DRAWING. SCALE 2:1. SHEET 1 OF 1. REV R.

STE TE Connectivity. CONNECTOR BLOCK FOR PINS WITH FEMALE JACKSCREW THREAD, 62 POSN, METRIMATE.