

1

2

3


4

5

6

7


Length

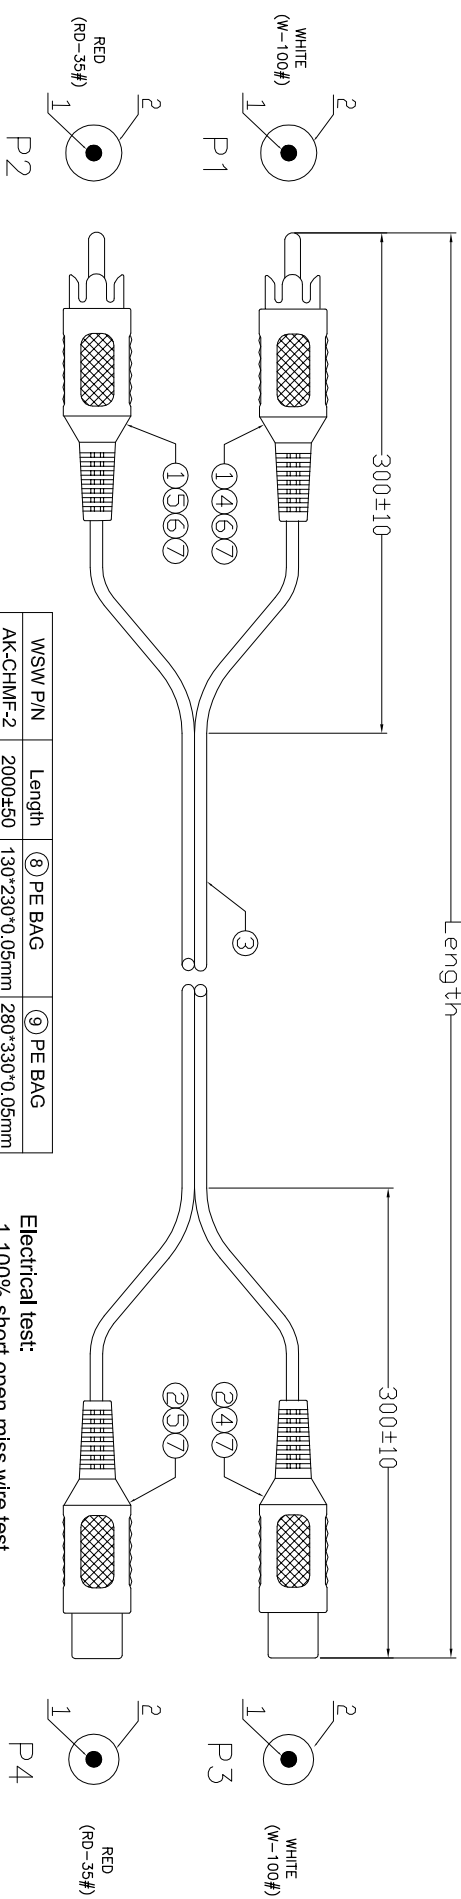


MSW P/N	Length	⑧ PE BAG	⑨ PE BAG
AK-CHMF-2	2000±50	130*230*0.05mm	280*330*0.05mm
AK-CHMF-015	1500±30	100*200*0.05mm	230*300*0.05mm
AK-CHMF-025	2500±50	130*230*0.05mm	280*330*0.05mm
AK-CHMF-050	5000±50	180*280*0.05mm	330*380*0.05mm

Electrical test:  
 1. 100% short, open, miss wire test  
 2. Conduct resistance:5 Ohm(max)  
 3. Insulation resistance:5Mohm(mIn)  
 4. dielectric test:DC 300V

**PIN ASSIGNMENT:**



NO.	TIE	QTY	NAME	SPECIFICATION
⑩	TIE	2	BLACK	
⑨	PE BAG	1/10	CLEAR PRINT BLACK*MADE IN CHINA*+*10PCS*	
⑧	PE BAG	1	CLEAR PRINT BLACK*MADE IN CHINA*+*1PC*	
⑦	TUBE	4	HEAT SHRINK TUBE BLACK OD1.5*10mm	
⑥	IN JACKET	3.2g	CLEAR LD-PE(Mould NO.NM-006)	
⑤	OUT JACKET	6.6g	PVC-40P RED(RD-35)	
④	OUT JACKET	6.6g	PVC-40P WHITE(W-100)	
③	CABLE	1	NOUL (10/0.10+28/0.10)*2F JACKET BLACK OD2.8*5.6mm	
②	CONN	2	RCA PLUG FEMALE NI-PLATED INSULATOR COLOR:BROWN	
①	CONN	2	RCA PLUG MALE BLOSSOM TYPE NI-PLATED INSULATOR COLOR:BROWN	

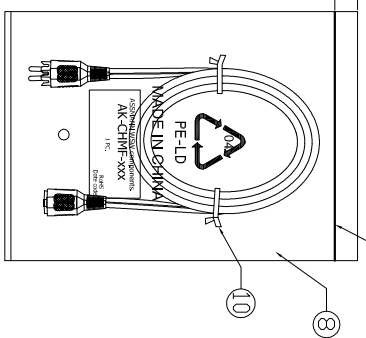

**RoHS compliant**  
Unit: mm

Scale	Free	Customer-No.
TOLERANCE		ASSMANN WSW-No.
		AK-CHMF-XX
DIM	TOL	Drawing-No.
		ASS 7865 CA
Angle	TOL	Replace
		rev00
		Sheet
Id.	Modification	
①	Drawn	
	20.02.2017	
	Amy	
Date	Name	
20.02.2017	Amy	
Approved	20.02.2017	
Approved	Amy	



1

2

3

4

5

6

7

A  
B  
C  
D  
E  
F  
G  
H