


REVISIONS			
LTR	DESCRIPTION	DATE	APPROVED
2	REVISED PER ECN # T-5868	1-3-86	JB
A	REVISED PER DCR# T-24466	3/23/2000	M.HIGGY

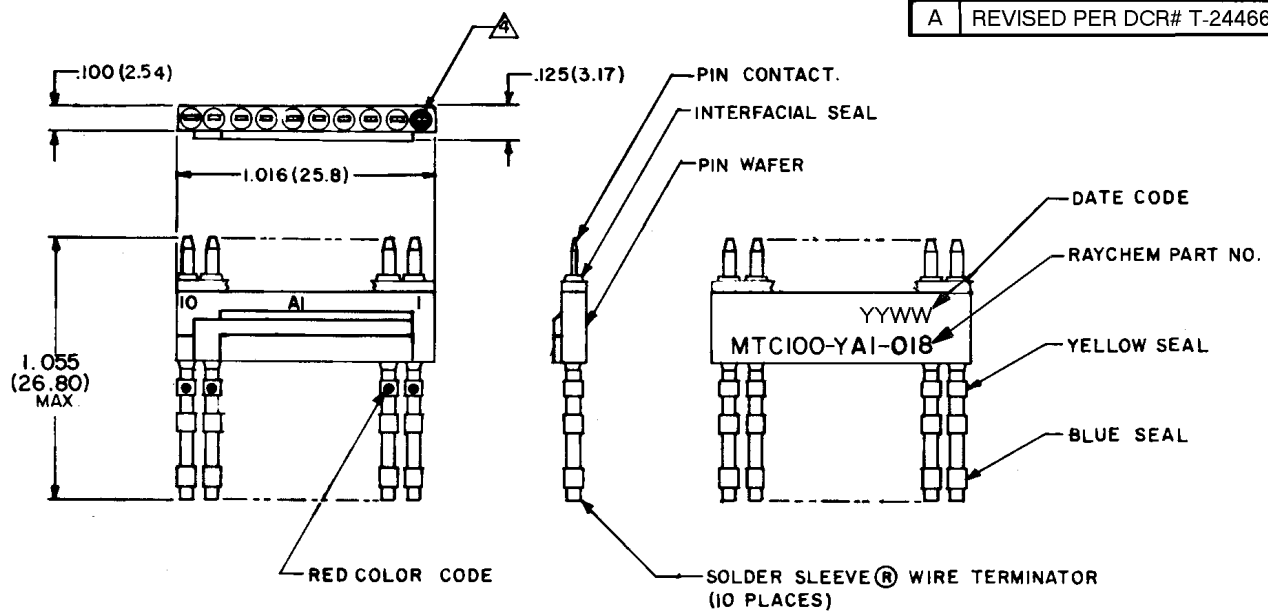

SPECIFICATION CONTROL DRAWING

- △ PIN NUMBER ONE IS MARKED IN CONTRASTING COLOR
 - 3. THIS PRODUCT IS DESIGNED TO MEET THE REQUIREMENTS OF RAYCHEM SPECIFICATION D-6012. QUALIFICATION IS PENDING.
 - C. CONTACT TAIL; SOLDER COATED PER QQ-S-571
 - B. PIN CONTACT ENGAGING AREA; GOLD PLATE PER MIL-G-45204, CLASS 1.
 - 2. FINISH:
 - A. PIN WAFER; FINISH TO BE AS MOLDED.
 - D. INTERFACIAL SEAL; SILICONE ELASTOMER PER ZZ-R-765.
 - C. SOLDER SLEEVE WIRE TERMINATOR; REFER TO RAYCHEM DWG: CTA-0068 FOR DATA.
 - B. PIN CONTACT; COPPER ALLOY PER QQ-B-750
 - 1. MATERIAL:
 - A. PIN WAFER; INSERT MATERIAL HIGH GRADE POLYARYLENE THERMOPLASTIC
- NOTES: **If this document is printed it becomes uncontrolled.**
Check with the web for latest revision.

DRAWN	R Uchmann.	10-11-84	Raychem <small>RAYCHEM CORPORATION 300 CONSTITUTION DRIVE MENLO PARK, CALIFORNIA 94025</small>			
CHECKED	JB					
APPROVED	Blair	10-12-84	TITLE WAFER "A" 1" PIN, SPECIAL 1" FOR USE IN MTC 100 2" CONNECTOR, 125 °C OPERATING TEMPERATURE, FOR 20-26 AWG ROUND WIRE TERMINATION, OVAL ENTRY MTC 100 SERIES (P.A.S.S.)			
APPROVED	Norman	1-24-84				
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES. METRIC DIMENSIONS ARE IN PARENTHESIS			SIZE	CODE IDENT. NO.	DWG. NO.	A
DO NOT SCALE THIS DRAWING			B	06090	MTC100-YA1-018	
			CAD FILE:	T24466.TIF	WEIGHT	SHEET 1 OF 1