

Caps Fingergrip for Holder FEU, FAU, FAC



250 VAC · 20 A (UL/CSA)



Standards

- IEC 60127-6
- UL 4248-1 / UL 512
- CSA C22.2 no. 39

References

Mating Cap to [FAC](#); [FAU](#); [FEU](#)

Weblinks

[pdf datasheet](#), [html-datasheet](#), [General Product Information](#), [Packaging details](#), [Approvals](#), [CE declaration of conformity](#), [RoHS](#), [CHINA-RoHS](#), [REACH](#), [Distributor-Stock-Check](#), [Detailed request for product](#)




Technical Data

Fuse-Link	5 x 20 or 6.3 x 32mm
Rated Voltage	250VAC
Rated current	10A (VDE), 20A (UL/CSA)
Degree of Protection	IP 40
Admissible Ambient Air Temp.	-40°C to 85°C
Material: Cap	Thermoset
Storage Conditions	0°C to 60°C, max. 70% r.h.

Contact Resistance	< mΩ at 20 mV
--------------------	---------------

Detailed information on product approvals, code requirements, usage instructions and detailed test conditions can be looked up in [General Product Information](#)

Dimension

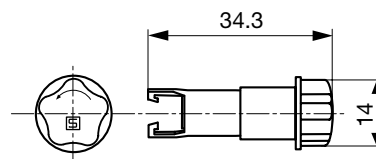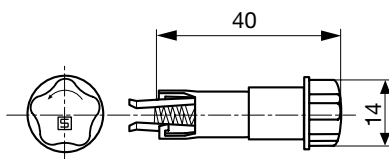

All Variants

Cap	Fuse-Link	Degree of Protection	Order Number
Fingergrip	6.3 x 32mm	IP 40	0031.1667
Fingergrip	5 x 20mm	IP 40	0031.1741

Most Popular.

Availability for all products can be searched real-time: <http://www.schurter.com/en/Stock-Check/Stock-Check-SCHURTER>

Packaging Unit

Plastic Bag (100 pcs.)