



REV C 1062-12-01 \*\*


REVISIONS			
SYM	DESCRIPTION	DATE	APPROVED
NC	NEW RELEASE PER E.O. P15224	02-17-97	R.D.R.
A	REVISED PER E.O. P15646	05-29-98	R.D.R.
B	REVISED PER E.O. P16979	12-08-00	R.D.R.
C	REVISED PER E.O. P19555	7-11-07	ADR

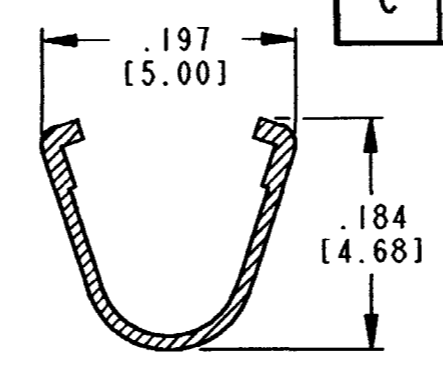

SECTION A-A  
CONDUCTOR WINGS

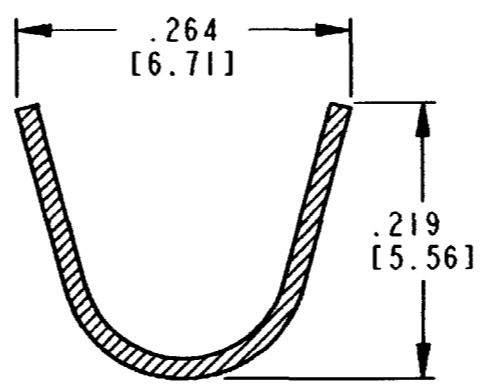

SECTION B-B  
INSULATION WINGS

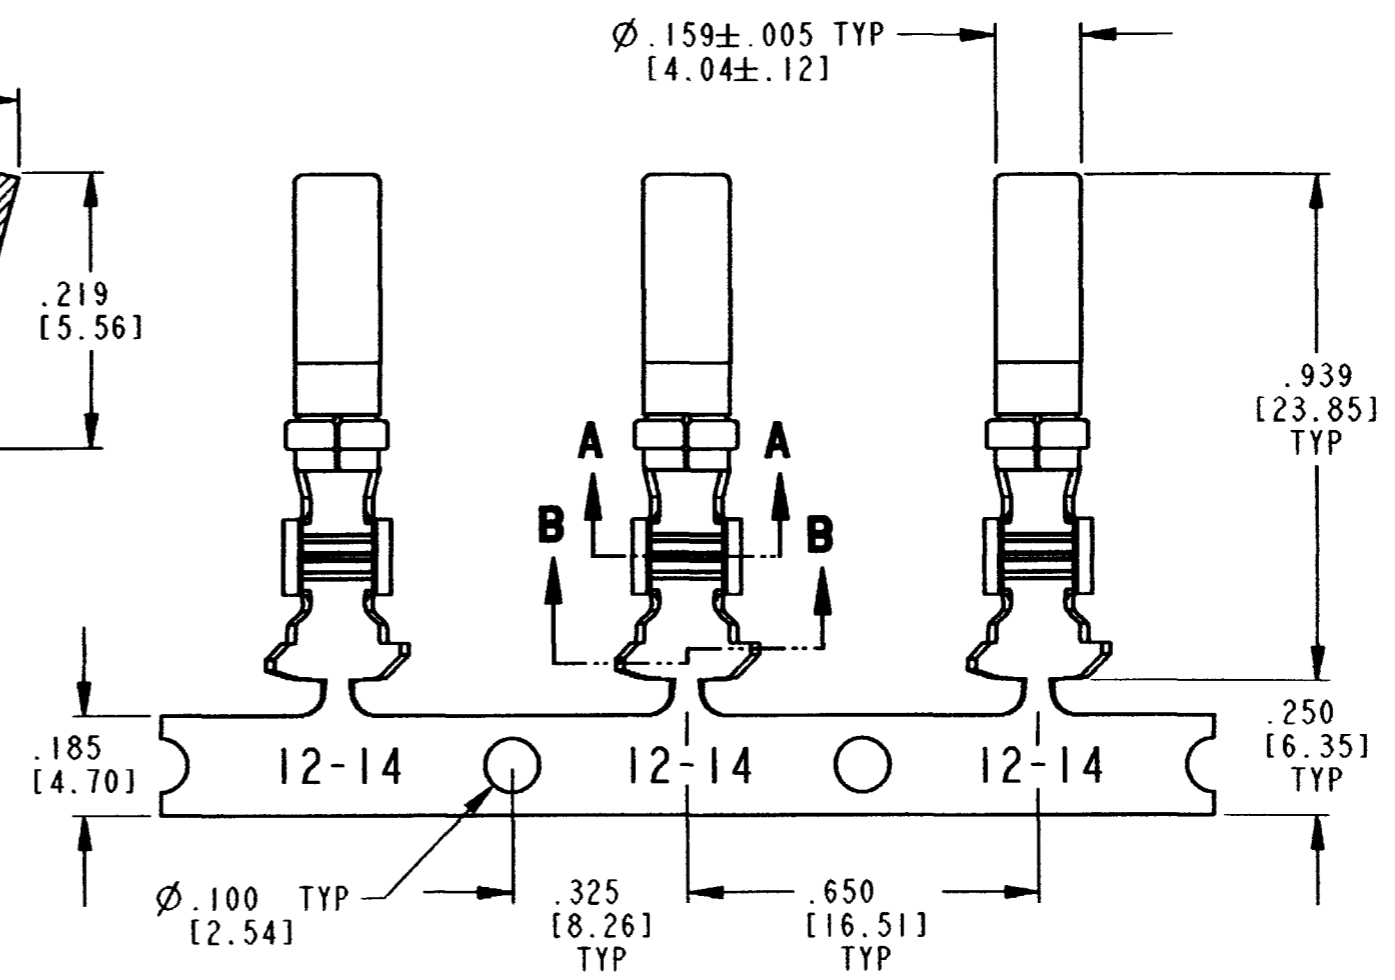

7. CONTACT MATERIAL CONTAINS 94% COPPER MINIMUM. CONTACT SLEEVE IS STAINLESS STEEL.
6. WHEN \*\* = 44 PLATING IS GOLD.  
\*\* = 66 PLATING IS TIN/NICKEL.
5. SEE 0425-015-0000 FOR CONTACT PERFORMANCE AND WIRE APPLICATION CHARACTERISTICS.
4. THIS CONTACT MAY BE CRIMPED WITH DCT12-02-00 AUTOMATIC DIE OR DTT-12-00 HAND TOOL. SEE DRAWING 0425-208-0000 FOR APPLICABLE WIRE SIZE, INSULATION DIAMETER RANGE, AND CRIMPING INFORMATION.
3. ONE REEL CONTAINS APPROXIMATELY 2500 CONTACTS.
2. DIMENSION TOLERANCE: ±.025 [ .64].
1. DIMENSIONS ARE IN INCHES [mm].

NOTES: UNLESS OTHERWISE SPECIFIED

SIGNATURE & DATE		<b>STAMPED CONTACT SOCKET SIZE 12</b>	EP EP058	MATL. CODE
DR	D. MEYER 11/14/00		<b>The Deutch Company</b>	
CHK	<i>[Signature]</i> 7/11/07		DEUTSCH I.P.D. 3850 INDUSTRIAL AVE. HEMET, CALIF. 92545	
PE	<i>[Signature]</i> 7/10/07		<b>B 1062-12-01 **</b>	
APPD	R. Rad 7-11-07	ENVELOPE	DWG SIZE	SHEET 1 OF 1
SCALE	NONE WT			