

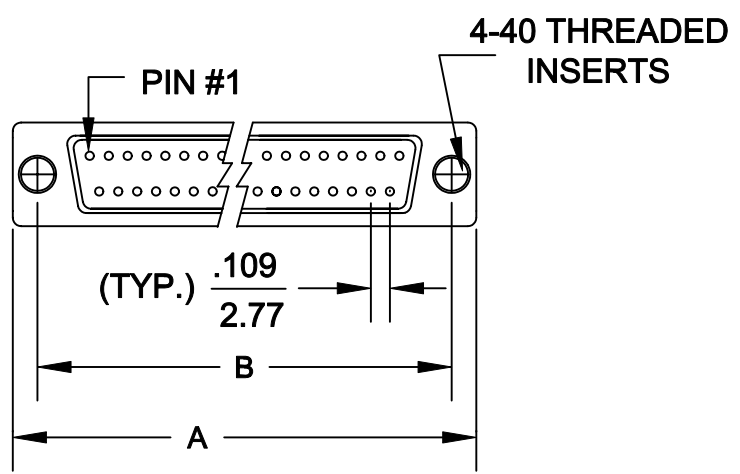


DESCRIPTION: ECONOMY FLAT RIBBON CONNECTOR

	A	B	C
9	1.213	.984	.850
	30.89	24.99	21.50
15	1.541	1.312	.850
	39.14	33.32	21.50
25	2.090	1.852	.850
	53.09	47.04	21.50
37	2.732	2.500	.850
	69.39	63.50	21.50

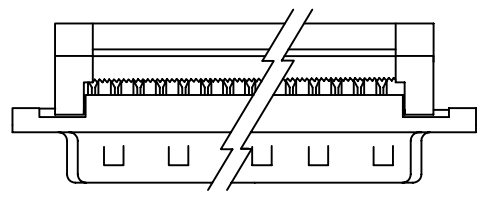

186-XXX-192L001

SERIES _____
 POSITIONS _____
 009 _____
 015 _____
 025 _____
 037 _____
 050 _____
 GENDER _____
 1 = MALE
 2 = FEMALE
 TERMINATION _____
 9 = IDC
 SHELL PLATING _____
 2 = TIN
 HARDWARE OPTIONS _____
 00 = NO HARDWARE
 55 = 4-40 INSERTS
 PLATING OPTIONS _____
 01 = GOLD FLASH

SPECIFICATIONS:

MATERIALS:

- SHELL: STEEL, TIN PLATED
- INSULATOR: UL 94V-0 RATED PBT +30% FIBER-GLASS OR NYLON-66
- CONTACTS: BRASS
- RoHS COMPLIANT

ELECTRICALS:

- CURRENT RATING: 1 AMP
- CONTACT RESISTANCE: 15 mOHMS MAX
- INSULATOR RESISTANCE: 1000 MOHMS MIN
- VOLTAGE: 500V AC FOR 1 MINUTE
- TEMPERATURE: -55°C TO +100°C

FOR USE WITH 26/28 AWG STRANDED .050 CENTER FLAT CABLE

	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OF SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.		DRAWN: WAYNE ROBBINS	DATE: 9-16-05
			CHECKED:	DATE:
NorComp		SCALE: 1:1	SHEET 1 OF 1	REV 1
		DWG NO. 186-XXX-192L551		