

SPECIFICATION FOR APPROVAL



TO: _____

PART NO.		REV.		DELTA SAMPLE ISSUE NO	
PART NAME	EMI FILTER			DELTA MODEL	30DBCS5B
ORDER P/N.	30DBCS5B			SAMPLE ISSUE DATE	

1. ELECTRICAL CHARACTERISTICS:

1-1. VOLTAGE RATING115/250 VAC

1-2. CURRENT RATING

A. AT 115VAC 30 A RMS Max.

B. AT 500VAC 30 A RMS Max.

1-3. OPERATING FREQUENCY..... 50/60 Hz

1-4. LEAKAGE CURRENT: EACH LINE TO GROUND

A. @115VAC 60Hz 1.0 mA Max.

B. @250VAC 50Hz 2.0 mA Max.

1-5. HIPOT RATING (FOR ONE MINUTE)

A. LINE TO GROUND 2250 VDC.

..... LINE TO LINE 1450 VDC.

1-6. TEMPERATURE RANGE: -25 TO +100 DEGREE C

1-7. MINIMUM INSERTION LOSS IN dB: (AT 50 OHM SYSTEM)

FREQ. MHz	.01	.05	.10	.15	.50	1.0	5.0	10	30
COM. MODE dB	/	/	/	10	28	30	45	50	35
DIF. MODE dB	/	/	/	12	20	25	45	50	45

1-8. SAFETY



REPORT BY	CHECKED BY	APPROVED BY		
			REV.	


SPECIFICATION FOR APPROVAL




TO: _____

PART NO.		REV.		DELTA SAMPLE ISSUE NO	
PART NAME	EMI FILTER			DELTA MODEL	30DBCS5B
ORDER P/N.	30DBCS5B			SAMPLE ISSUE DATE	

2. MECHANICAL DIMENSIONS :

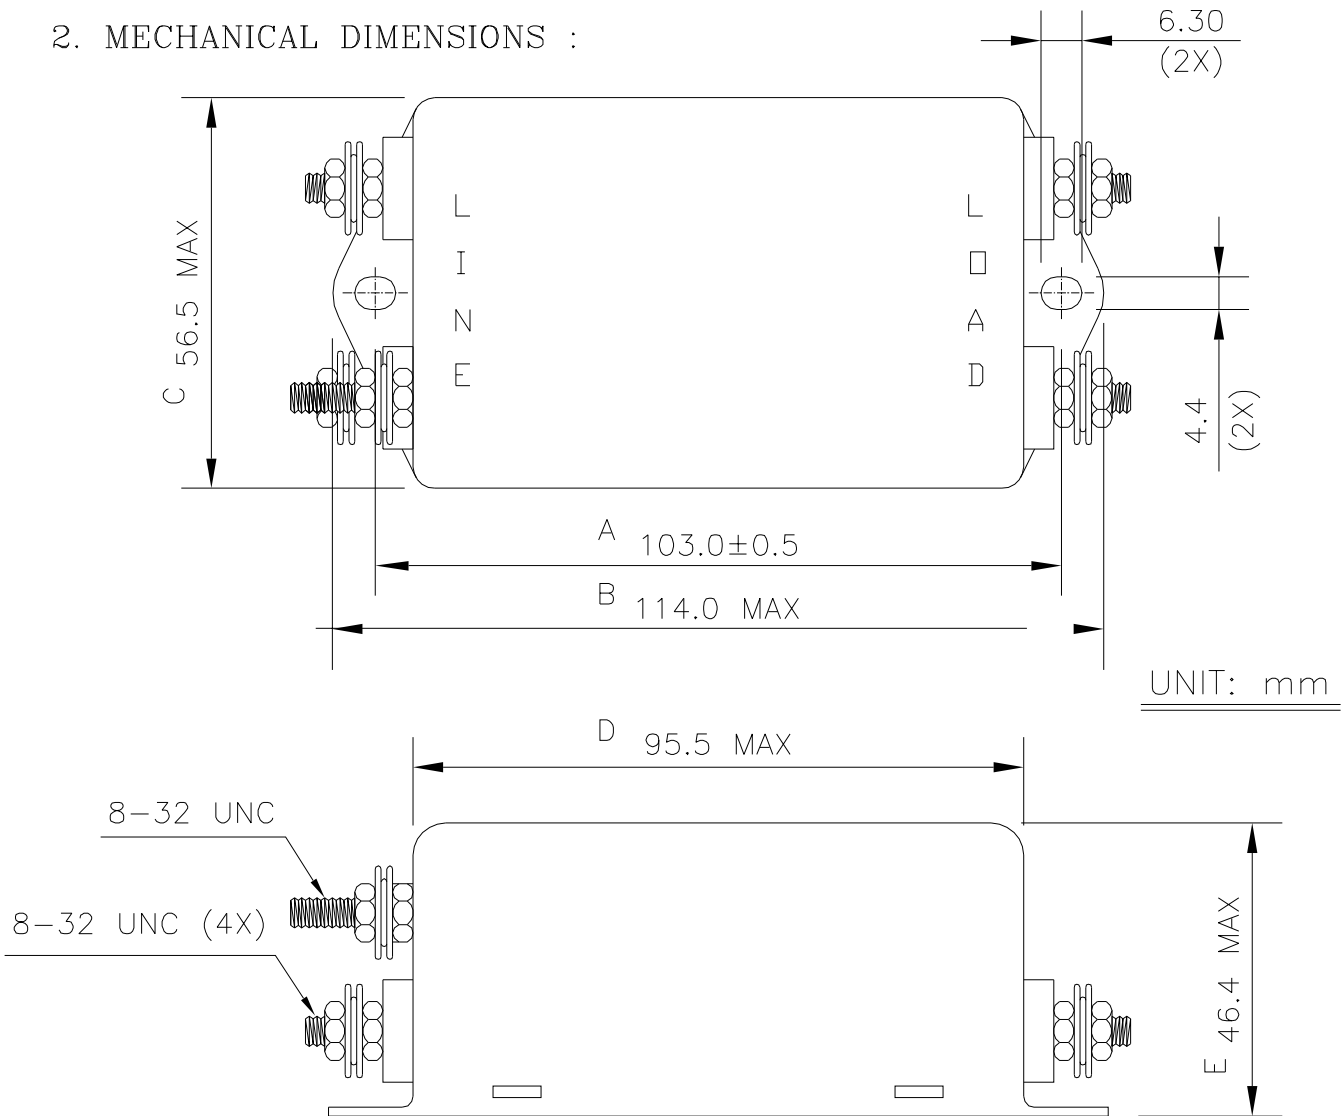

3. SCHEMATIC :

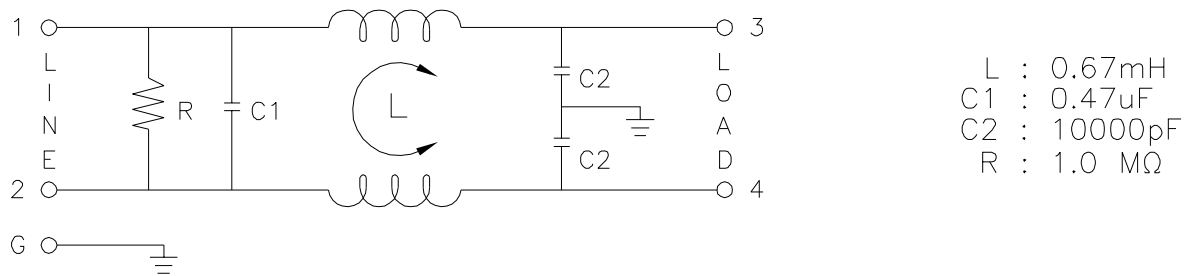

REPORT BY	CHECKED BY	APPROVED BY	UNLESS OTHERWISE SPECIFIED DIMENSION TOLERANCE DCEIMALS .X± .XX± ANGLES±		
			REV.		

DELTA ELECTRONICS, INC.

186 RUEY KUANG ROAD, NEIHU. TAIPEI 114,
TAIWAN, R.O.C.
TEL:886-2-87972088 FAX:886-2-87972120