


MODEL NO.	PACKAGING
134-1010-003	ONE PCS PER BAG

REV	ECO	DATE
001	ECO-17-002	11/28/2017

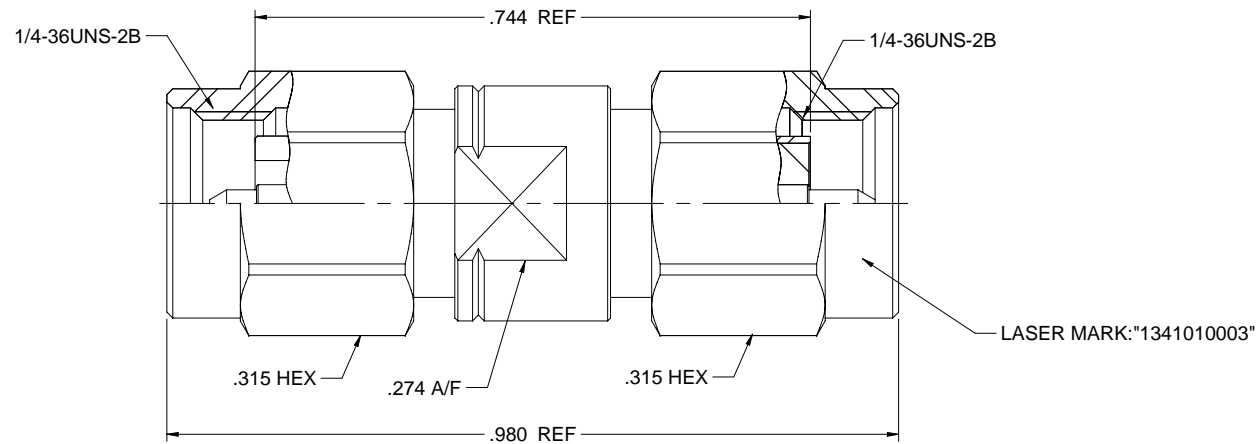

NOTES: UNLESS OTHERWISE SPECIFIED

1. MATERIAL & FINISH:
  - 1.1 BODY & SHELL: PASSIVATED STAINLESS STEEL
  - 1.2 CONTACT PIN : GOLD PLATED BERYLLIUM COPPER
  - 1.3 INSULATOR: PTFE WHITE
  - 1.4 C RING: BERYLLIUM COPPER
  - 1.5 GASKET: SILICONE RED
2. ELECTRICAL:
  - 2.1 IMPEDANCE: 50 OHMS
  - 2.2 FREQUENCY RANGE: 0-26.5 GHZ
  - 2.3 VOLTAGE STANDING WAVE RATIO: 1.3 MAX
  - 2.4 DIELECTRIC WITHSTADING VOLTAGE: 750 VRMS MIN
  - 2.5 CONTACT RESISTANCE:
    - 2.5.1 CENER CONTACT: 3 MILLIOHM MAX
    - 2.5.2 OUTER CONTACT: 2 MILLIOHM MAX
  - 2.6 INSULATOR RESISTANCE: 5000 MEGOHM MIN
3. MECHANICAL:
  - 3.1 ENGAGEMENT / DISENGAGEMENT FORCE: 2 IN-LBS. MAX
  - 3.2 COUPLING NUT RETENTION: 60 LBS. MIN
  - 3.3 COUPLING PROOF TORQUE: 15 IN-LBS. MIN
  - 3.4 CONTACT RETENTION: 6 LBS. MIN
  - 3.5 DURABILITY: 500 CYCLES MIN
4. ENVIRONMENT:
  - 4.1 THERMAL SHOCK: MIL-STD-202, METHOD 107, CONDITION B.
  - 4.2 OPERATING TEMPERATURE: -55TO 125°C
  - 4.3 SALT SPRAY: MIL-STD-202, METHOD 101, CONDITION B
  - 4.4 SHOCK: MIL-STD-202, METHOD 213, CONDITION I
  - 4.5 VIBRATION: MIL-STD-202, METHOD 204, CONDITION D
  - 4.6 MOISTURE RESISTANCE: MIL-STD-202, METHOD 106

	Model No. 134-1010-003	Johnson