


PERFORMANCE CHARACTERISTICS

CURRENT RATING 1.5 A AT 20°C (FULLY LOADED)  
1 A AT 70°C (FULLY LOADED)

RATED VOLTAGE 500V AC (CONT / CONT)  
OPERATING TEMPERATURE -55°C TO 125°C  
CONTACT RESISTANCE 20 MΩ MAX  
INSERTION FORCE :0.75 N MAX /CONT  
EXTRACTION FORCE: 0.15 N MIN /CONT  
INSULATION RESISTANCE :10<sup>4</sup> MΩ MIN

NOTES

- LEAD FREE INDICATOR : LF- LEAD FREE
- PERFORMANCE LEVEL INDICATOR (REF DWG No. BS,C,201844,003)  
THIS PRODUCT IS CSA APPROVED  
THIS PRODUCT IS UL RECOGNISED
- FOR RECOMMENDED PTH DIMENSIONS REFER DRAWING: BSA,201,572001
- THIS PRODUCT (LF) MEETS EUROPEAN UNION DIRECTIVE AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.

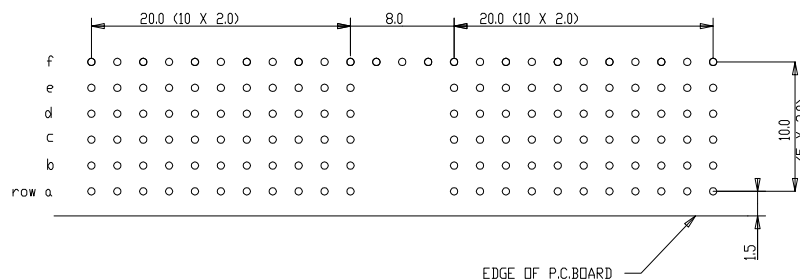

Material		Spec ref		tolerance	projection	MM
Mat code		Heat treat		±0.05	±0.10	±0.20
Plating/Finish						
rev	ecn no	dr	date	Dr	4 2 92	J V B
A	000000	KN	14-9-01	Eng		
B	105-0093	MNI	08/06/05	Chr		
C	1005-0278	Kason	02/08/05	Appr		
D	1007-0362	Kason	05/09/07			
E	1010-0110	NZ	05/30/10			
-	-	-	-			
07	DIMENSION CHANGE	RN	09/08/01	Prd/E File	catalog no	

Product family	Model Name	Model Revision	REL Level
MILLIPACS	HM210P510F----		

Part No	Part Name	Part Desc	Part Unit	Part Qty	Part Loc
BS,C,201444,031	MPACS 5+2R RA RCP CONN TYPE A				