


COIL: @ 25°C  
 RESISTANCE 1350 OHMS ± 10%  
 NOMINAL VOLTAGE 26.5 VDC  
 MUST OPERATE 13.5 VDC  
 MUST RELEASE 8.1 VDC MAX, 1.5 VDC MIN.

ENVIRONMENT:  
 VIBRATION 10 CPS TO 3000 CPS @ 30 g's  
 SHOCK 75 g's 6 MS. DURATION  
 TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE & RELEASE 4 MS MAX.  
CONTACT STABILIZATION TIME 2.5 MS MAX.

**CUSTOMER DATA SHEET**

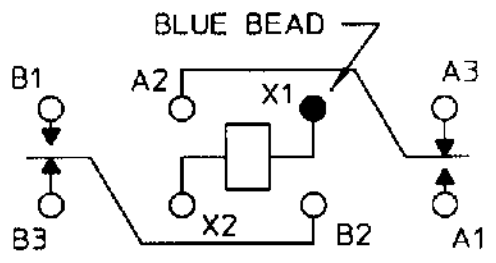

CONTACT RATING: LOW LEVEL TO  
2 AMPS 28 VDC RESISTIVE  
50,000 OPERATIONS

DR. R.B. 3/13/98 *[Signature]* 3/13/98



CUST. QPL  
 CUST. NO. M39016/13-057P

TYPE '3SBC' RELAY

**3SBC2002A2**